



Linear EcoMax

- Easy to install LED linear solution
- Elegant but sturdy design: IP44 and IK06
- Comfortable light due to opal diffuser
- Central or side power connection
- Motion and daylight sensor accessory available



Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	CCT (K)	Weight (kg/pc)
Emergency version 3 hours, On-Off							
549003004500	LEDLinear-E CL15-53W-4000-WH-EM3	TL 2x58W	53	6360	120	4000	3.73

Accessories



140060553
LED Module sensor CT

Packaging Information

Item			Box			
Item Code	Item Description	EU HS Code	Dimensions (mm) (LxWxH)	Gross Weight (kg)	EAN	pc/box
549003004500	LEDLinear-E CL15-53W-4000-WH-EM3	94051190	195x85x1555	4.23	6941497737489	1
140060553	LED Module sensor CT	85365005	40x35x80	0.06	6945730491732	1
506006003100	LEDSmart-Relay-500W	85364900	37x110x57	0.10	6956321820824	1

Technical Specifications

Lifetime (L70)	70,000 h
Lifetime (L80)	50,000 h
On-/Off-cycles	100,000
Dimmability	On-Off
Beam angle	110°
Finishing	White RAL9003
Colour rendering index (CRI)	> 80
Degree of protection (IP)	IP44
Impact strength	IK06
Protection class	I
Risk group (EN 62471)	RG0
With control gear	Yes
Power factor	≥ 0.9

Electrical Supply

Frequency	50/60 Hz
Nominal voltage	220-240 V
DC input voltage	No


Mechanical Properties

Housing material	Steel
Optical material	PMMA

Ambient Conditions



Operating temperature	-10~+40°C
Application temperature	+25°C
Storage environment	-25~+50°C

5 YEARS WARRANTY

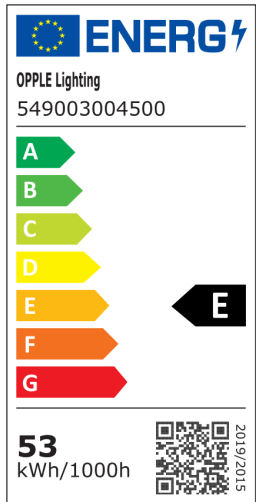

Dimensional Drawing (mm)

LEDLinear-E CL15

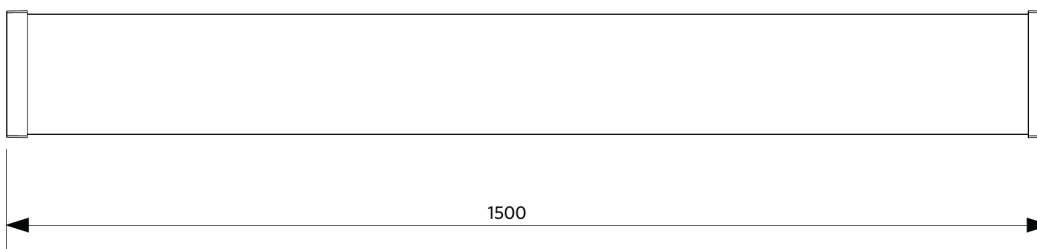

Photometric Data

