



Waterproof Performer G4

- Powerful range of waterproof luminaires in specific "sealed for life" design
- Quick installation thanks to its screwless endcap
- Supplied with vandal-proof stainless steel ceiling and suspension clips



Specifications

| Item Code | Item Description | Equivalent to (W) | Power (W) | Lumen | Efficacy (lm/W) | CCT (K) | Internal wiring (mm ²) | Max. input cable diameter (mm) | Weight (kg/pc) |
|-----------------------------------|------------------------------------|-------------------|-----------|-------|-----------------|---------|------------------------------------|--------------------------------|----------------|
| Emergency version 3 hours, On-Off | | | | | | | | | |
| 711000009700 | LEDWaterproof-P4 L1489-47W-840-EM3 | TL 2x58W | 47 | 7050 | 150 | 4000 | 4x2.5 | 7-11 | 2.21 |

Packaging Information

| Item | | | Box | | | |
|--------------|------------------------------------|------------|-------------------------|-------------------|---------------|--------|
| Item Code | Item Description | EU HS Code | Dimensions (mm) (LxWxH) | Gross Weight (kg) | EAN | pc/box |
| 711000009700 | LEDWaterproof-P4 L1489-47W-840-EM3 | 94051190 | 1497x70x80 | 2.50 | 6931783014868 | 1 |

Technical Specifications

| | |
|------------------------------|---------------------------------------|
| Lifetime (L70) | 100,000 h |
| Lifetime (L80) | 80,000 h |
| On-/Off-cycles | 100,000 |
| Colour consistency (SDCM) | 4 |
| Dimmability | On-Off |
| Beam angle | 120° |
| Finishing | Grey RAL 7035 |
| Colour rendering index (CRI) | > 80 |
| Degree of protection (IP) | IP66 |
| Impact strength | IK08 |
| Protection class | II |
| Risk group (EN 62471) | RG0 |
| With control gear | Yes |
| Glow wire test | 850°C |
| Power factor | ≥ 0.9 |
| Input wire diameter | 1mm ² - 2.5mm ² |

Electrical Supply

| | |
|------------------|--|
| Frequency | 50/60 Hz |
| Nominal voltage | 220-240 V |
| DC input voltage | See catalogue appendix Connection Specifications |

Mechanical Properties

| | |
|------------------|-----------------|
| Material housing | Polycarbonate |
| UV resistant | Yes |
| Optical material | Polycarbonate |
| Mounting clips | Stainless steel |

Ambient Conditions


| | |
|-------------------------|-----------|
| Operating temperature | -30~+45°C |
| Application temperature | +25°C |
| Storage environment | -30~+50°C |

5 YEARS WARRANTY



Dimensional Drawing (mm)

LEDWaterproof-P4 L1489

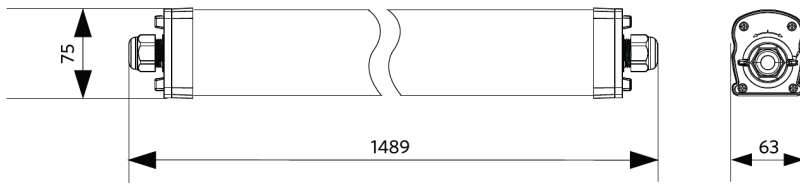

Installation Possibilities



Photometric Data

