



Wall Light Lucia

- Stylish, compact and sturdy wall mounted fixture for outdoor application
- Ultra-slim with only 30mm thickness
- Aesthetic up-down lighting effect
- Elegant die-casted body design without visible screws
- Easy loop-in and loop-out installation
- IP65 and suitable for use on coastal applications



Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	CCT (K)	Weight (kg/pc)
On-Off							
715000006300	LEDWall-Lucia-E Re135-6W-830-BL	Halogen 60W	6	570	95	3000	0.47

Packaging Information

Item			Box			
Item Code	Item Description	EU HS Code	Dimensions (mm) (LxWxH)	Gross Weight (kg)	EAN	pc/box
715000006300	LEDWall-Lucia-E Re135-6W-830-BL	94054239	160x125x60	0.77	6931783002940	1

Technical Specifications	
Lifetime (L70)	50,000 h
Lifetime (L80)	30,000 h
On-/Off-cycles	100,000
Colour consistency (SDCM)	4
Dimmability	On-Off
Beam angle	30° x 80°
Finishing	Black
Colour rendering index (CRI)	> 80
Degree of protection (IP)	IP65
Impact strength	IK08
Protection class	I
Risk group (EN 62471)	RG1
With control gear	Yes
Glow wire test	850°C
Power factor	≥ 0.9

Electrical Supply	
Frequency	50/60 Hz
Nominal voltage	220-240 V
DC input voltage	No

Mechanical Properties	
Housing material	Aluminum
Optical material	Polycarbonate
Coastal proof	n/a

Ambient Conditions	
Operating temperature	-20-+45°C
Application temperature	+25°C
Storage environment	-20-+60°C



ENERGY

OPPLE Lighting
715000006300

A
B
C
D
E
F
G


F

6 kWh/1000h

2019/2015

Dimensional Drawing (mm)

LEDWall-Lucia-E Re135-6W

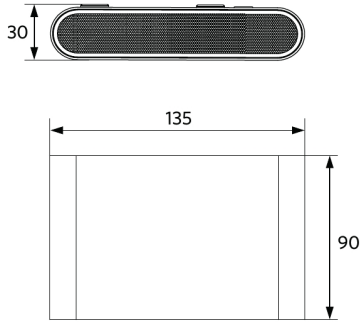

Photometric Data

