



- Single-ended full IEC compliant LED Tube with patented driver
- Retrofit existing T8 lamps with EM ballast installations ONLY!
- No warm-up time, 100% light instantly when switched on
- Full glass body
- High efficacy up to 134 lm/W



SAFE AND EASY INSTALLATION: ONLY USE WITH LED DUMMY STARTER.  
Tubes are NOT suitable for serial installation.

## Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	CCT (K)	Weight (kg/pc)
<b>On-Off</b>							
140062610	LED P T8 glass 600 8W 100pct 3000K CT	TL 1x18W		1050	131	3000	0.11
140062611	LED P T8 glass 600 8W 100pct 4000K CT	TL 1x18W		1050	131	4000	0.11
140062612	LED P T8 glass 600 8W 100pct 6500K CT	TL 1x18W		1050	131	6500	0.11
140062613	LED P T8 glass 1200 16W 100pct 3000K CT	TL 1x36W		2100	131	3000	0.20
140062614	LED P T8 glass 1200 16W 100pct 4000K CT	TL 1x36W		2100	131	4000	0.20
140062615	LED P T8 glass 1200 16W 100pct 6500K CT	TL 1x36W		2100	131	6500	0.20
140062616	LED P T8 glass 1500 23W 100pct 3000K CT	TL 1x58W		3100	134	3000	0.27
140062617	LED P T8 glass 1500 23W 100pct 4000K CT	TL 1x58W		3100	134	4000	0.27
140062618	LED P T8 glass 1500 23W 100pct 6500K CT	TL 1x58W		3100	134	6500	0.27

Single-ended connection




Technical Specifications		Electrical Supply	
Lifetime (L70)	50,000 h	Frequency	50/60 Hz
On-/Off-cycles	100,000	Nominal voltage	220-240 V
Dimmability	On-Off	DC input voltage	No
Beam angle	220°	<b>Ambient Conditions</b>	
Finishing	White	Operating temperature	-25-+45°C
Colour rendering index (CRI)	> 80	Application temperature	+25°C
Fitting	G13	Storage environment	-25-+50°C




## Dimensional Drawing (mm)

LED P T8 glass 600

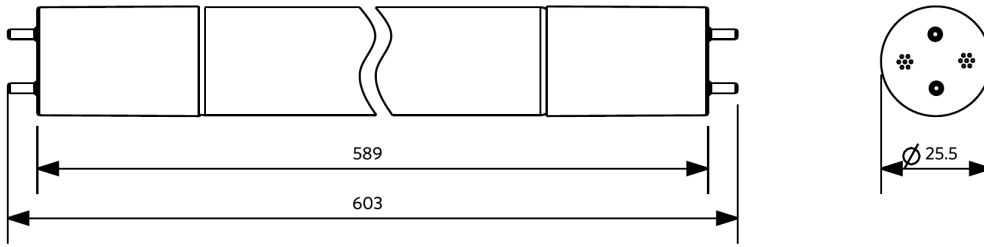

LED P T8 glass 1200

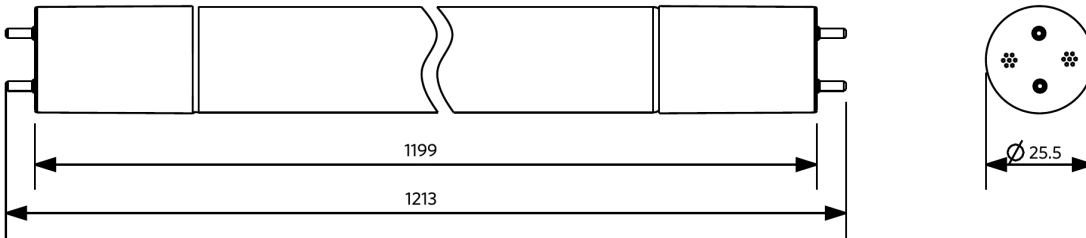

LED P T8 glass 1500

