



## Trunking

- Professional LED light line solution
- Simple installation with snap-in mounting of LED modules and trunks
- Very high efficacy of up to 180 lm/W
- 35W LED module with diffuser available
- Multiple beam angles (60°, 90°, 120°) and powers available
- Extra energy saving by using DALI2 dimmable LED modules and fully customisable DALI2 sensors
- Integration of 3C Spots possible with 3C Track Module accessory



## Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	Beam angle	Net Weight (kg/pc)
<b>On-Off</b>							
542005008200	LEDTrunking Module L15-35W-4000-120	TL 2x58W	35	6300	180	120°	1.64
542005006000	LEDTrunking Module L15-50W-4000-60	TL 2x80W	50	9000	180	60°	1.64
542005005900	LEDTrunking Module L15-50W-4000-90	TL 2x80W	50	9000	180	90°	1.64
542005005800	LEDTrunking Module L15-50W-4000-120	TL 2x80W	50	9000	180	120°	1.64
542005006400	LEDTrunking Module L15-70W-4000-60	2x TLM 140W RS	70	12600	180	60°	1.71
542005006300	LEDTrunking Module L15-70W-4000-90	2x TLM 140W RS	70	12600	180	90°	1.71
542005006200	LEDTrunking Module L15-70W-4000-120	2x TLM 140W RS	70	12600	180	120°	1.71
<b>DALI2</b>							
542005008600	LEDTrunking Module L15-35W-4000-120-DALI	TL 2x58W	35	6300	180	120°	1.64
542005006800	LEDTrunking Module L15-50W-4000-60-DALI	TL 2x80W	50	9000	180	60°	1.64
542005006700	LEDTrunking Module L15-50W-4000-90-DALI	TL 2x80W	50	9000	180	90°	1.64
542005006600	LEDTrunking Module L15-50W-4000-120-DALI	TL 2x80W	50	9000	180	120°	1.64
542005007200	LEDTrunking Module L15-70W-4000-60-DALI	2x TLM 140W RS	70	12600	180	60°	1.71
542005007100	LEDTrunking Module L15-70W-4000-90-DALI	2x TLM 140W RS	70	12600	180	90°	1.71
542005007000	LEDTrunking Module L15-70W-4000-120-DALI	2x TLM 140W RS	70	12600	180	120°	1.71
<b>DALI2/Diffuser Lens</b>							
534001000100	LEDTrunking Mod L15-35W-4000-DF-DALI-DZ	TL 2x58W	35	5950	170	120°	1.64
<b>Emergency kit 1 hour/On-Off</b>							
549004007010	LEDTrunk Mod L15-35W-4000-120-EM1	TL 2x58W	35	6300	180	120°	1.94
549004007210	LEDTrunk Mod L15-50W-4000-60-EM1	TL 2x80W	50	9000	180	60°	1.94
549004007610	LEDTrunk Mod L15-50W-4000-90-EM1	TL 2x80W	50	9000	180	90°	1.94
549004005510	LEDTrunk Mod L15-50W-4000-120-EM1	TL 2x80W	50	9000	180	120°	1.94
549004007410	LEDTrunk Mod L15-70W-4000-60-EM1	2x TLM 140W RS	70	12600	180	60°	2.01
549004007510	LEDTrunk Mod L15-70W-4000-90-EM1	2x TLM 140W RS	70	12600	180	90°	2.01
549004007310	LEDTrunk Mod L15-70W-4000-120-EM1	2x TLM 140W RS	70	12600	180	120°	2.01

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	Beam angle	Net Weight (kg/pc)
<b>Emergency kit 1 hour/DALI2</b>							
549004006910	LEDTrunk Mod L15-35W-4000-120-DALI-EM1	TL 2x58W	35	6300	180	120°	1.94
549004005610	LEDTrunk Mod L15-50W-4000-60-DALI-EM1	TL 2x80W	50	9000	180	60°	1.94
549004006310	LEDTrunk Mod L15-50W-4000-90-DALI-EM1	TL 2x80W	50	9000	180	90°	1.94
549004007110	LEDTrunk Mod L15-50W-4000-120-DALI-EM1	TL 2x80W	50	9000	180	120°	1.94
549004006410	LEDTrunk Mod L15-70W-4000-60-DALI-EM1	2x TLM 140W RS	70	12600	180	60°	2.01
549004006210	LEDTrunk Mod L15-70W-4000-90-DALI-EM1	2x TLM 140W RS	70	12600	180	90°	2.01
549004006510	LEDTrunk Mod L15-70W-4000-120-DALI-EM1	2x TLM 140W RS	70	12600	180	120°	2.01
<b>Emergency kit 1 hour/DALI2/Diffuser Lens</b>							
549004010400	LEDTrunk Mod L15-35W-4000-DF-DALI-EM1-DZ	TL 2x58W	35	5950	170	120°	2.54
<b>Emergency kit 3 hour/On-Off</b>							
549004004610	LEDTrunk Mod L15-35W-4000-120-EM3	TL 2x58W	35	6300	180	120°	2.04
549004005910	LEDTrunk Mod L15-50W-4000-60-EM3	TL 2x80W	50	9000	180	60°	2.04
549004005710	LEDTrunk Mod L15-50W-4000-90-EM3	TL 2x80W	50	9000	180	90°	2.04
549004006810	LEDTrunk Mod L15-50W-4000-120-EM3	TL 2x80W	50	9000	180	120°	2.04
549004004810	LEDTrunk Mod L15-70W-4000-60-EM3	2x TLM 140W RS	70	12600	180	60°	2.11
549004006710	LEDTrunk Mod L15-70W-4000-90-EM3	2x TLM 140W RS	70	12600	180	90°	2.11
549004006010	LEDTrunk Mod L15-70W-4000-120-EM3	2x TLM 140W RS	70	12600	180	120°	2.11
<b>Emergency kit 3 hour/DALI2</b>							
549004004510	LEDTrunk Mod L15-35W-4000-120-DALI-EM3	TL 2x58W	35	6300	180	120°	2.04
549004005310	LEDTrunk Mod L15-50W-4000-60-DALI-EM3	TL 2x80W	50	9000	180	60°	2.04
549004005410	LEDTrunk Mod L15-50W-4000-90-DALI-EM3	TL 2x80W	50	9000	180	90°	2.04
549004006610	LEDTrunk Mod L15-50W-4000-120-DALI-EM3	TL 2x80W	50	9000	180	120°	2.04
549004004910	LEDTrunk Mod L15-70W-4000-60-DALI-EM3	2x TLM 140W RS	70	12600	180	60°	2.11
549004005010	LEDTrunk Mod L15-70W-4000-90-DALI-EM3	2x TLM 140W RS	70	12600	180	90°	2.11
549004005110	LEDTrunk Mod L15-70W-4000-120-DALI-EM3	2x TLM 140W RS	70	12600	180	120°	2.11
<b>Emergency kit 3 hour/DALI2/Diffuser Lens</b>							
549004010500	LEDTrunk Mod L15-35W-4000-DF-DALI-EM3-DZ	TL 2x58W	35	5950	170	120°	2.64
<b>Trunks</b>							
542098002100	LEDTrunking Trunk 8 L15						1.75
542098002200	LEDTrunking Trunk 8 L15 End Part						1.42
542098002300	LEDTrunking Trunk 8 L30						3.2
542098002400	LEDTrunking Trunk 8 L30 End Part						3

DALI versions are compatible with central emergency lighting according to EN 50172. For more technical information, please go to the appendix.

## Accessories



542098001000  
LEDTrunking DALI Power Supply



542098001100  
LEDTrunking Sensor Cover L15



542098001700  
LEDTrunking End Cap



542098001800  
LEDTrunking Cover L15



542098001900  
LEDTrunking Mounting Clip Chain



542098002000  
LEDTrunking Cord-3m



542098002900  
LEDTrunking Mounting Clip



542098004600  
LEDTrunking Sensor Probe L



542098011000  
LEDTrunking Cover End Cap



542098003000  
LEDTrunking Cable Gland



821017003200  
LEDSmart-BLE2-DALI-Converter



542098001500  
LEDTrunking Feed-in Connector 8



534000000700  
LEDTrunking End Cap-DF-DZ



542098001300  
LEDTrunking Feed-in Box 8



542098011200  
LEDTrunking Feed-out Box 8



542098012700  
LEDTrunking 3C Track Module



821011002600  
LEDSmart-BLE2-DALI-Connect-Box

### Technical Specifications

Lifetime (L70)	70,000 h
Lifetime (L80)	60,000 h
Lifetime (L90)	50000 h
On-/Off-cycles	100,000
Dimmability	On-Off / DALI2
RAL-Number	9016
Colour rendering index (CRI)	> 80
Ingress Protection (IP)	IP20
Protection class	I
Risk group (EN 62471)	RG0
With control gear	Yes
Power factor	> 0.9

### Electrical Supply

Frequency	50 - 60 Hz
Nominal voltage	220 - 240 V
DC input voltage	See catalogue appendix Connection Specifications

### Mechanical Properties


Housing material	Steel
Optical material	PMMA / PC

### Ambient Conditions


Operating temperature	-25 - 40°C
Application temperature	25°C
Storage environment	-25 - 50°C




## Dimensional Drawing (mm)



Type	A	B	C	D
L1500	1500	100	70	39
L3000	3000	100	70	39

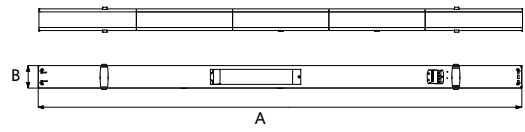


Type	A	B	C
Mod	1499	70	39



Type	A	B	C	D
L1500	1500	150	70	39
L3000	3000	150	70	39

## Motion Sensors

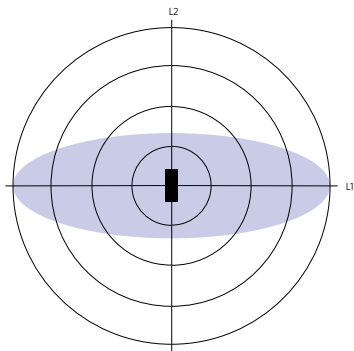

50% sensitivity
100% sensitivity

Installation height (m)	Sensor Probe L (m) (L1xL2)	Sensor Probe H (m) (LxL2)
3	5.0x2.2	-
4	4.5x2.2	6.7x2.9
5	4.0x2.1	8.4x3.6
6	-	10.0x4.4
7	-	9.0x3.9
8	-	8.0x3.6
9	-	7.0x3.2
10	-	6.0x2.8

Installation - Ceiling mounted