




设计者  
电话  
传真  
电子邮件

## OPPLE 531000020500 LEDBatten-E L15 24/48W DALI / 配光曲线 (极坐标)

灯具: OPPLE 531000020500 LEDBatten-E L15 24/48W DALI

光源: 1 x LEDBatten-E L15 24/48W DALI

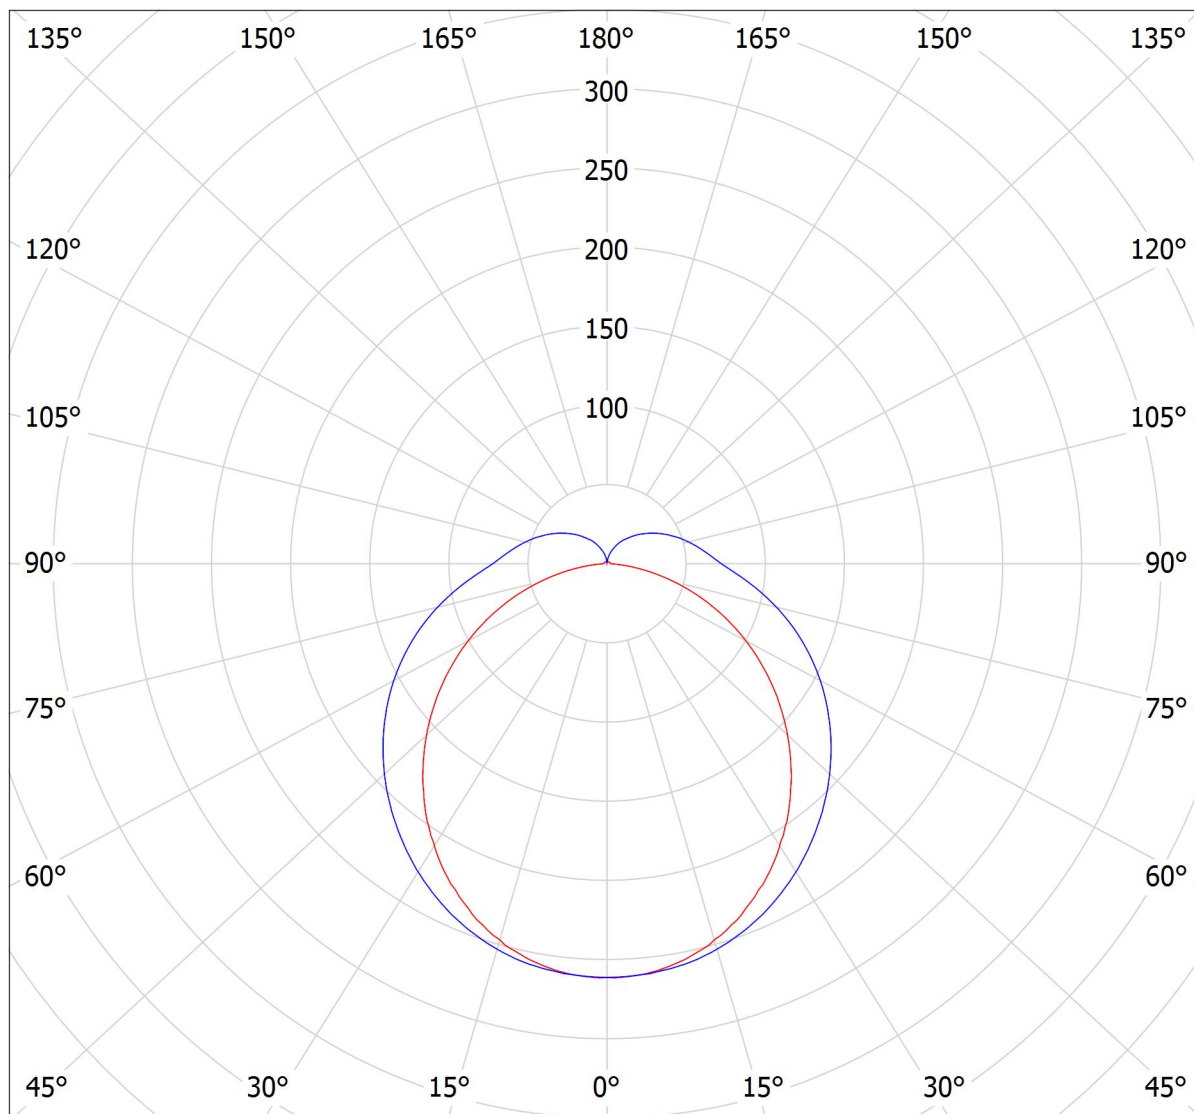

cd/klm

— C0 - C180

— C90 - C270

$\eta = 99\%$




设计者  
电话  
传真  
电子邮件

### OPPLE 531000020500 LEDBatten-E L15 24/48W DALI / 配光曲线 (线坐标)

灯具: OPPLE 531000020500 LEDBatten-E L15 24/48W DALI

光源: 1 x LEDBatten-E L15 24/48W DALI

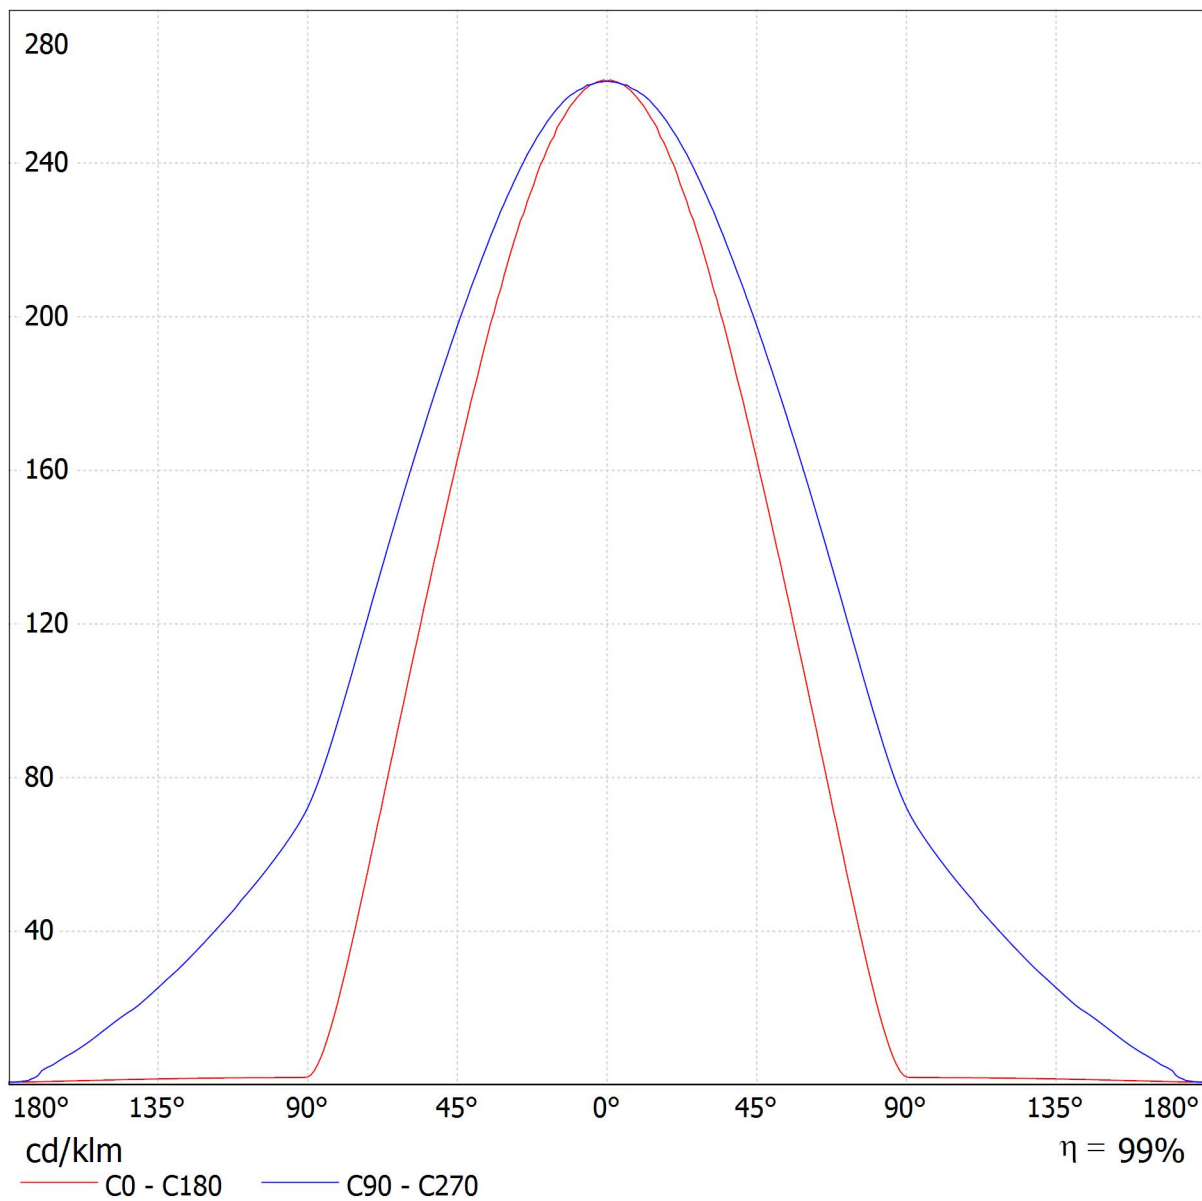

设计者  
电话  
传真  
电子邮件

## OPPLE 531000020500 LEDBatten-E L15 24/48W DALI / UGR 眩光限制表格

灯具: OPPLE 531000020500 LEDBatten-E L15 24/48W DALI

光源: 1 x LEDBatten-E L15 24/48W DALI

参照UGR的照射评估											
ρ 天花板	70	70	50	50	30	70	70	50	50	30	
ρ 墙壁	50	30	50	30	30	50	30	50	30	30	
ρ 地板	20	20	20	20	20	20	20	20	20	20	
空间尺寸 X Y		纬向观察方向 向灯轴					平行观察方向 向灯轴				
2H	2H	21.4	22.7	21.9	23.1	23.7	23.0	24.3	23.5	24.7	25.2
	3H	22.9	24.1	23.5	24.6	25.1	25.4	26.5	25.9	27.0	27.6
	4H	23.5	24.6	24.1	25.1	25.7	26.7	27.8	27.2	28.3	28.9
	6H	23.9	24.9	24.5	25.5	26.0	28.1	29.1	28.6	29.6	30.2
	8H	24.1	25.0	24.6	25.5	26.2	28.8	29.8	29.4	30.3	30.9
	12H	24.1	25.0	24.7	25.6	26.2	29.7	30.6	30.3	31.2	31.8
4H	2H	22.5	23.5	23.0	24.0	24.6	23.6	24.7	24.2	25.2	25.8
	3H	24.2	25.1	24.8	25.7	26.3	26.3	27.2	26.8	27.7	28.3
	4H	25.0	25.8	25.6	26.4	27.0	27.7	28.5	28.3	29.1	29.8
	6H	25.5	26.2	26.1	26.8	27.5	29.3	30.0	29.9	30.6	31.3
	8H	25.7	26.4	26.3	27.0	27.7	30.2	30.8	30.8	31.5	32.2
	12H	25.8	26.4	26.5	27.1	27.8	31.2	31.8	31.8	32.4	33.1
8H	4H	25.8	26.4	26.4	27.1	27.8	28.1	28.7	28.7	29.3	30.0
	6H	26.6	27.2	27.3	27.8	28.6	29.9	30.5	30.6	31.1	31.8
	8H	27.0	27.5	27.7	28.1	28.9	31.0	31.5	31.6	32.1	32.9
	12H	27.3	27.7	27.9	28.4	29.1	32.2	32.6	32.9	33.3	34.1
12H	4H	26.0	26.6	26.7	27.2	28.0	28.1	28.7	28.7	29.3	30.0
	6H	27.1	27.5	27.7	28.2	29.0	30.0	30.5	30.7	31.2	31.9
	8H	27.5	28.0	28.2	28.7	29.4	31.2	31.6	31.8	32.3	33.0
对应该照射距离, 改变观察者位置 S											
S = 1.0H	+0.1 / -0.1					+0.1 / -0.1					
S = 1.5H	+0.2 / -0.3					+0.3 / -0.3					
S = 2.0H	+0.3 / -0.6					+0.4 / -0.4					
标准表格	BK14					BK12					
更正加数	10.6					16.0					
更正的闪光指数, 参照 7200lm 总光通量											

依据CIE Publ. 117 计算UGR数据。 Spacing-to-Height-Ratio = 0.25.




设计者  
电话  
传真  
电子邮件

**OPPLE 531000020500 LEDBatten-E L15 24/48W DALI / 圆锥图**

灯具: OPPLE 531000020500 LEDBatten-E L15 24/48W DALI

光源: 1 x LEDBatten-E L15 24/48W DALI

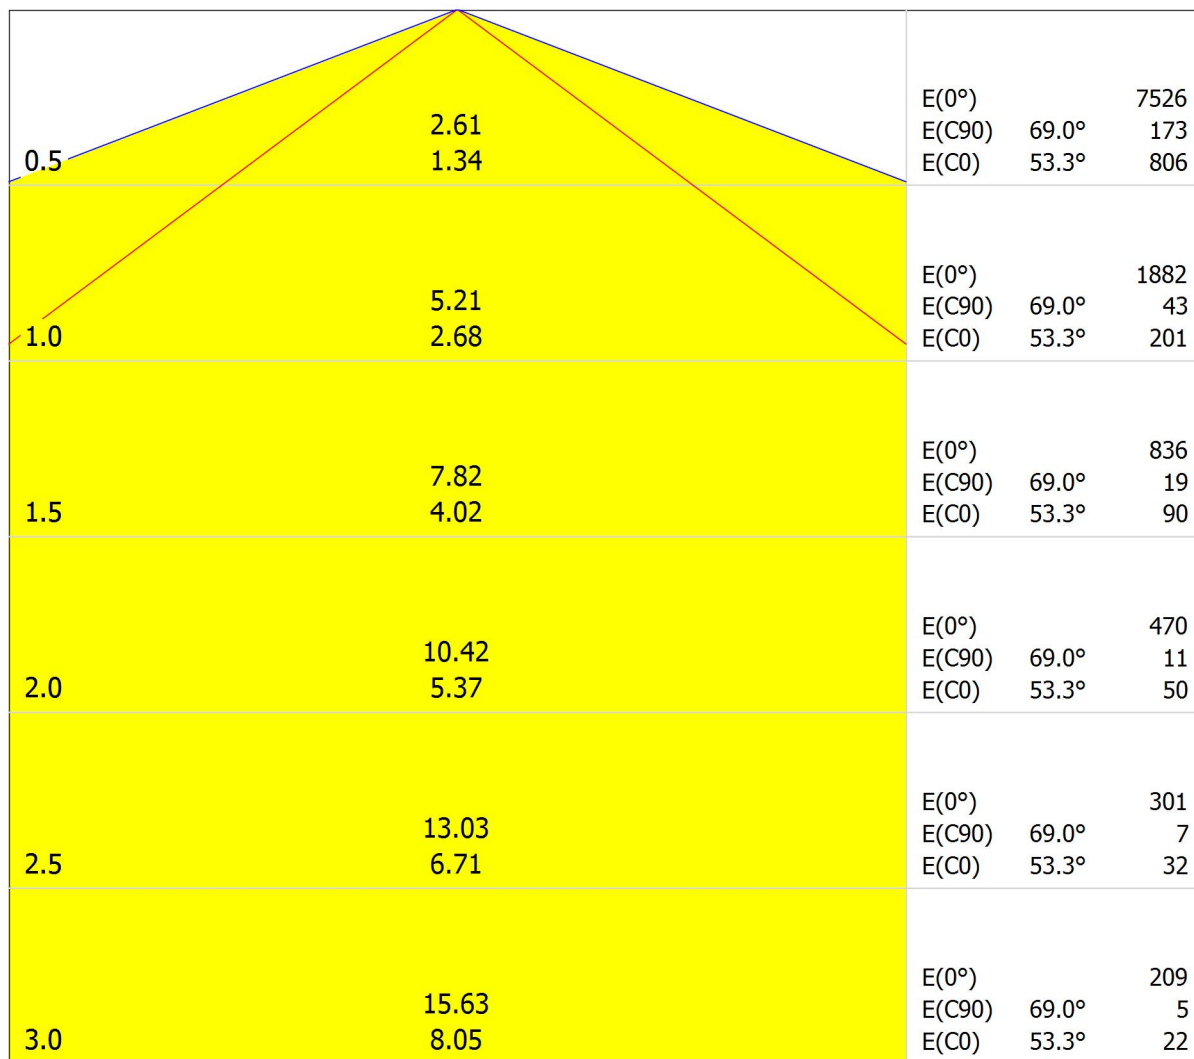

间距 [m]                      锥体直径 [m]                      照度 [lx]

— C0 - C180 (半散角: 106.6°)

— C90 - C270 (半散角: 138.0°)