



## Panel Performer Surface Mounted

- No need to repaint the ceiling due to wide dimensions
- Easy to install with mounting bracket
- Office compliant, UGR19
- Integrated CCT switch for color selection (3000K-4000K)



## Specifications

Item Code	Item Description	Equivalent to	(W)	Power (W)	Lumen Efficacy (lm/W)	CCT (K)	Colour rendering index (CRI)	Weight (pc/kg)
542003156200	LEDPanelS-Sf-P L15-50W-830/840	TL 2x58W	50	6250	125	3K/4K	> 80	5.5

Available on request with Wieland GST18 or WAGO WINSTA connector, or Euro/Schuko plug. DALI2 versions are compatible with central emergency lighting according to EN 50172.

## Packaging information

Item			Box			
Item Code	Item Description	EU HS Code	Dimensions (mm) (LxWxH)	Gross Weight (kg)	EAN	pc/box
542003156200	LEDPanelS-Sf-P L15-50W-830/840	94051190	1590x381x61	5.65	6941491742113	1

### Technical Specifications

Lifetime (L70)	70,000 h
Lifetime (L80)	50,000 h
On-/Off-cycles	100,000
Colour consistency (SDCM)	3
Dimmability	On-Off
Beam angle	90 °
Finishing	White RAL9003
RAL-Number	9003
UGR	19
Ingress Protection (IP)	IP20
Impact strength (IK)	IK03
Protection class	II
Risk group (EN 62471)	RG0
With control gear	True
Glow wire test	650 °C
Driver failure rate (at 5,000 hrs)	≤ 1 %
Power factor	≥ 0.9

### Electrical Supply


Frequency	50 - 60 Hz
Nominal voltage	220 - 240 V
DC input voltage	See catalogue appendix Connection Specifications

### Mechanical Properties


Housing material	Aluminium
Optical material	Polycarbonate

### Ambient Conditions

Operating temperature	-10 - 45 °C
Application temperature	25 °C
Storage environment	-25 - 50 °C



## Dimensional Drawing (mm)

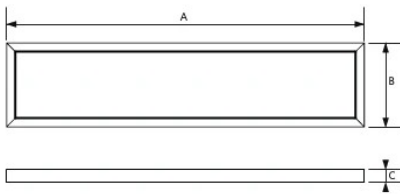

	A	B	C
L12	1274	370	55
L15	1574	370	55

## Motion Sensors



# Photometric Data

