



## Bollard / Wall Light Leo

- Stylish black Bollard and Wall light family
- Exchangeable luminaire head for Bollard and Wall Light
- Integrated CCT switch for color selection (3000K-4000K)
- IP65 waterproof and IK08 impact resistance
- Standard triac dimmable



## Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	CCT (K)	Weight (pc/kg)
<b>Dimmable (Triac)</b>							
715000011200	LEDWalllight-Leo-P 8W-830/840-CL	Halogen 60W	8	620	78	3K/4K	1

## Packaging information

Item			Box			
Item Code	Item Description	EU HS Code	Dimensions (mm) (LxWxH)	Gross Weight (kg)	EAN	pc/box
715000011200	LEDWalllight-Leo-P 8W-830/840-CL	94054239	360x130x125	1.50	6931783047583	1

### Technical Specifications

Lifetime (L70)	70,000 h
Lifetime (L80)	50,000 h
On-/Off-cycles	100,000
Colour consistency (SDCM)	4
Dimmability	Triac
Finishing	Black RAL 9005
Colour rendering index (CRI)	> 80
Ingress Protection (IP)	IP65
Impact strength (IK)	IK08
Protection class	I
Risk group (EN 62471)	RG0
With control gear	True
Glow wire test	850 °C
Driver failure rate (at 5,000 hrs)	≤ 0.5 %
Power factor	≥ 0.9
Surge protection (kV)	1 kV

### Electrical Supply


Frequency	50 - 60 Hz
Nominal voltage	220 - 240 V
DC input voltage	No

### Mechanical Properties



Housing material	Aluminium
Optical material	Polycarbonate
Cover material	Polycarbonate
Coastal proof	True

### Ambient Conditions

Operating temperature	-20 - 45 °C
Application temperature	25 °C
Storage environment	-25 - 60 °C



# Dimensional Drawing (mm)

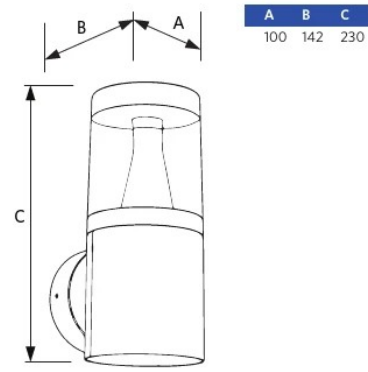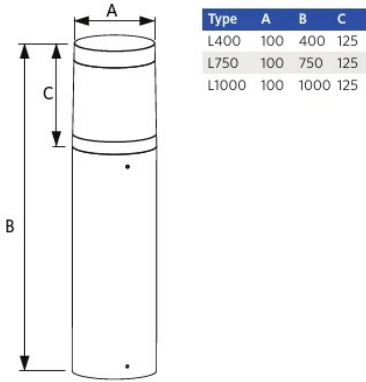

# Motion Sensors



# Photometric Data

