



## Slim Spot EcoMax

- Stylish, and super slim spot with only 31mm height
- Excellent color rendering with CRI90
- Integrated CCT switch for color selection (2700K-3000K-4000K)
- External flicker free driver
- Triac dimming version in 7W
- Universal cut-out of 68mm



## Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	CCT (K)	Gross Weight (kg)
<b>On-Off</b>							
541003767400	LEDSpotRA-Slim-E 5W-927/930/940-AL	Halogen 50W	5	525	105	2.7K/3K/4K	0.14
541003767200	LEDSpotRA-Slim-E 5W-927/930/940-WH	Halogen 50W	5	525	105	2.7K/3K/4K	0.14
541003767300	LEDSpotRA-Slim-E 5W-927/930/940-BL	Halogen 50W	5	525	105	2.7K/3K/4K	0.14
<b>Triac</b>							
541003767700	LEDSpotRA-Slim-E 7W-927/930/940-DIM-AL	Halogen 50W	7	735	105	2.7K/3K/4K	0.14
541003767500	LEDSpotRA-Slim-E 7W-927/930/940-DIM-WH	Halogen 50W	7	735	105	2.7K/3K/4K	0.14
541003767600	LEDSpotRA-Slim-E 7W-927/930/940-DIM-BL	Halogen 50W	7	735	105	2.7K/3K/4K	0.14

Technical Specifications	
Lifetime (L70)	50,000 h
Lifetime (L80)	30,000 h
On-/Off-cycles	100,000
Colour consistency (SDCM)	4
Dimmability	On-Off / Triac
Beam angle	36°
Recommended tilt angle	25°
Finishing	Brushed Aluminum / Matte White / Matte Black
Ingress Protection (IP)	IP20
Impact strength (IK)	IK02
Protection class	II
Risk group (EN 62471)	RG0
With control gear	Yes
Glow wire test	650°C
Driver failure rate (at 5,000 hrs)	< 1%
Power factor	> 0.9


Electrical Supply	
Frequency	50 - 60 Hz
Nominal voltage	220 - 240 V
DC input voltage	See catalogue appendix Connection Specifications
230V Cable length	0.3 m

Mechanical Properties	
Housing material	Aluminium
Optical material	Polycarbonate

Ambient Conditions	
Operating temperature	-10 - 40°C
Application temperature	25°C
Storage environment	-25 - 50°C



## Dimensional Drawing (mm)

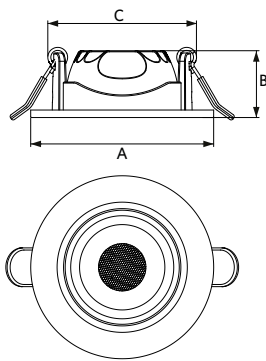

	A	B	C
RA-Slim	85	31	68

## Installation Opening Drawing (mm)

