

Waterproof Batten

- Cost effective IP65 Waterproof solution
- Slim and compact design
- 1m cable with IP65-connector
- Perfect light uniformity
- Supplied with stainless steel mounting clips, movable along the entire length of the fixture



Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	CCT (K)	Net Weight (pc/kg)
531000023000	LEDWaterproof-Batten L15-50W-840	TL 2x58W	50	5500	110	4000	0.553

Packaging information

Item			Box			
Item Code	Item Description	EU HS Code	Dimensions (mm) (LxWxH)	Gross Weight (pc/kg)	EAN	pc/box
531000023000	LEDWaterproof-Batten L15-50W-840	94051190	1597x52x52	0.64	6941491753645	1

Technical Specifications

Lifetime (L70)	30,000 h
On-/Off-cycles	60,000
Colour consistency (SDCM)	4
Dimmability	On-Off
Beam angle	120 °
Finishing	Grey Pantone 419U
Colour rendering index (CRI)	> 80
Ingress Protection (IP)	IP65
Impact strength (IK)	IK06
Protection class	II
Risk group (EN 62471)	RG0
Wirethrough	False
With control gear	True
Glow wire test	650 °C
Driver failure rate (at 5,000 hrs)	≤ 1 %
Power factor	≥ 0.9

Electrical Supply


Frequency	50 - 60 Hz
Nominal voltage	220 - 240 V
DC input voltage	No

Mechanical Properties


Housing material	Polycarbonate
Optical material	Polycarbonate
Mounting clips	Stainless steel

Ambient Conditions


Operating temperature	-20 - 40 °C
Application temperature	25 °C
Storage environment	-20 - 40 °C

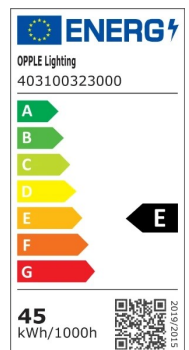

Dimensional Drawing (mm)



Installation Possibilities

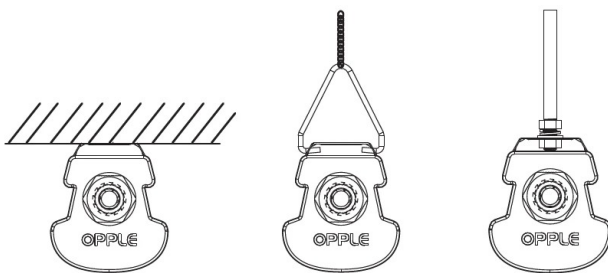

Photometric Data

