



**LED Strip - IP20 - Tunable White**

- Complete LED Strip portfolio
- Wide profile portfolio with different color options



## Specifications

Item Code	Item Description	Efficacy (lm/W)	CCT (K)	LEDs per meter	Minimum cutting length (mm)	Power per meter (W/m)	Lumen per meter (lm/M)	Net Weight (kg/pc)
<b>Smart/IP20</b>								
806001008500	LEDStrip-P 12W-1000-TW-IP20	120	2700 - 6500	140	100	12	1440	0.1

## Accessories



806098002000  
LEDStrip Profile-SF-15x15-AL



806098002200  
LEDStrip Profile-SF-17x7-AL



806098002500  
LEDStrip Profile-RC-15x15-AL



806098002600  
LEDStrip Profile-Corner-18x18-AL



806098003100  
LEDStrip Connector-SS-TW-IP20



806098003500  
LEDStrip Wire-Connector-SW-TW-IP20



806098003900  
LEDStrip Wire-Connector-SS-TW-IP20



806098004300  
LEDStrip L-Connector-SS-TW-IP20



820004013700  
LEDDriver 24V-200W-BLE2-TW



826001000300  
LEDDriver 24V-80W-BLE2-TW



806001023500  
LEDStrip TW-RF-Remote-Controller




806001023300  
LEDStrip RGBW/TW-RF-Controller



822010000700  
LEDStrip RGBW/TW/DIM-BLE2-Controller

## Packaging information

Item			Box			
Item Code	Item Description	EU HS Code	Dimensions (mm) (LxWxH)	Gross Weight (kg/pc)	EAN	pc/box
806001008500	LEDStrip-P 12W-1000-TW-IP20	94054239	200x180x14	0.16	6941491788654	1
806098002000	LEDStrip Profile-SF-15x15-AL	94059900	2050x33x33	0.20	6931783054406	1
806098002100	LEDStrip Profile-SF-15x15-BL	94059900	2050x33x33	0.20	6931783054413	1
806098002200	LEDStrip Profile-SF-17x7-AL	94059900	2050x33x33	0.20	6931783054420	1
806098002300	LEDStrip Profile-SF-17x7-BL	94059900	2050x33x33	0.20	6931783054437	1
806098002500	LEDStrip Profile-RC-15x15-AL	94059900	2050x33x33	0.20	6931783054451	1
806098002600	LEDStrip Profile-Corner-18x18-AL	94059900	2050x33x33	0.20	6931783054468	1
806098003100	LEDStrip Connector-SS-TW-IP20	85444290	18x12x11	0.04	6931783054253	1
806098003500	LEDStrip Wire-Connector-SW-TW-IP20	85444290	110x12x11	0.04	6931783054284	1
806098003900	LEDStrip Wire-Connector-SS-TW-IP20	85444290	110x12x11	0.04	6931783054314	1
806098004300	LEDStrip L-Connector-SS-TW-IP20	85444290	21x21x21	0.04	6931783054345	1
820004013700	LEDDriver 24V-200W-BLE2-TW	85369010	311x56x32	0.33	6941491787442	1
826001000300	LEDDriver 24V-80W-BLE2-TW	85369010	250x56x30	0.26	6941491787718	1
806001023500	LEDStrip TW-RF-Remote-Controller	85269200	200x180x14	0.03	6937209622600	1
806001023300	LEDStrip RGBW/TW-RF-Controller	94059200	200x180x14	0.03	6937209622587	1
822010000700	LEDStrip RGBW/TW/DIM-BLE2-Controller	94059200	120x57x31	0.09	6937209623362	1

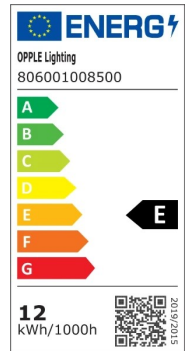

Technical Specifications	
Lifetime (L70)	50,000
Dimmability	BLE2
Colour rendering index (CRI)	> 90
Ingress Protection (IP)	IP20
Risk group (EN 62471)	RG0
With control gear	False

Electrical Supply	
Frequency	50 - 60
Nominal voltage	220 - 240

Mechanical Properties	
Length	5000

Ambient Conditions	
Operating temperature	-10 ~ 45 °C
Application temperature	25 °C
Storage environment	-25 ~ 50 °C

## Dimensional Drawing (mm)

