



LED Strip - IP20 - Tunable White

- Complete LED Strip portfolio
- Wide profile portfolio with different color options



Specifications

Item Code	Item Description	Efficacy (lm/W)	CCT (K)	[LEDs per meter]	[Minimum cutting length]	[Power per meter]	[Lumen per meter]	Net Weight (pc/kg)
Smart/IP20								
806001008500	LEDStrip-P 12W-1000-TW-IP20	120	2700 - 6500	140	100	12	1440	0.1

Accessories



806098002000
LEDStrip Profile-SF-15x15-AL



806098002200
LEDStrip Profile-SF-17x7-AL



806098002500
LEDStrip Profile-RC-15x15-AL



806098002600
LEDStrip Profile-Corner-18x18-AL



806098003100
LEDStrip Connector-SS-TW-IP20



806098003500
LEDStrip Wire-Connector-SW-TW-IP20



806098003900
LEDStrip Wire-Connector-SS-TW-IP20



806098004300
LEDStrip L-Connector-SS-TW-IP20



820004013700
LEDDriver 24V-200W-BLE2-TW



826001000300
LEDDriver 24V-80W-BLE2-TW

Packaging information

Item			Box			
Item Code	Item Description	EU HS Code	Dimensions (mm) (LxWxH)	Gross Weight (pc/kg)	EAN	pc/box
806001008500	LEDStrip-P 12W-1000-TW-IP20	94054239	200x180x14	0.16	6941491788654	1
806098002000	LEDStrip Profile-SF-15x15-AL	94059900	2050x33x33	0.20	6931783054406	1
806098002100	LEDStrip Profile-SF-15x15-BL	94059900	2050x33x33	0.20	6931783054413	1
806098002200	LEDStrip Profile-SF-17x7-AL	94059900	2050x33x33	0.20	6931783054420	1
806098002300	LEDStrip Profile-SF-17x7-BL	94059900	2050x33x33	0.20	6931783054437	1
806098002500	LEDStrip Profile-RC-15x15-AL	94059900	2050x33x33	0.20	6931783054451	1
806098002600	LEDStrip Profile-Corner-18x18-AL	94059900	2050x33x33	0.20	6931783054468	1
806098003100	LEDStrip Connector-SS-TW-IP20	85444290	18x12x11	0.04	6931783054253	1
806098003500	LEDStrip Wire-Connector-SW-TW-IP20	85444290	18x12x11	0.04	6931783054284	1
806098003900	LEDStrip Wire-Connector-SS-TW-IP20	85444290	18x12x11	0.04	6931783054314	1
806098004300	LEDStrip L-Connector-SS-TW-IP20	85444290	18x12x21	0.04	6931783054345	1
820004013700	LEDDriver 24V-200W-BLE2-TW	85369010	311x56x32	0.33	6941491787442	1
826001000300	LEDDriver 24V-80W-BLE2-TW	85369010	250x56x30	0.26	6941491787718	1

Technical Specifications

Lifetime (L70)	50,000
Dimmability	BLE2
Colour rendering index (CRI)	> 90
Ingress Protection (IP)	IP20
Risk group (EN 62471)	RG0
With control gear	False

Electrical Supply


Frequency	50 - 60
Nominal voltage	220 - 240

Mechanical Properties


[Length]	5000
----------	------

Ambient Conditions


Operating temperature	-10 - 45 °C
Application temperature	25 °C
Storage environment	-25 - 50 °C

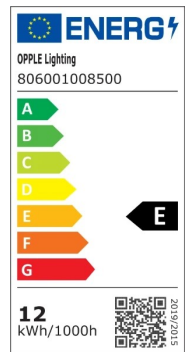

Dimensional Drawing (mm)

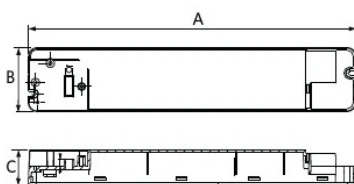

IP20 Driver	A	B	C
80W	230	45	25
200W	311	48	26



Strip IP20	A	B	C	D	E
12W	5000	300	8	1,5	100

