



LED Strip - IP67

- Complete LED Strip portfolio
- Wide profile portfolio with different color options



Specifications

Item Code	Item Description	Efficacy (lm/W)	CCT (K)	[LEDs per meter]	[Minimum cutting length]	[Power per meter]	[Lumen per meter]	Net Weight (pc/kg)
IP67								
806001008900	LEDStrip-E 14.4W-940-1800-IP67	120	4000	140	42	14.4	1730	0.25

Accessories



806098002000
LEDStrip Profile-SF-15x15-AL



806098002200
LEDStrip Profile-SF-17x7-AL



806098002500
LEDStrip Profile-RC-15x15-AL



806098002600
LEDStrip Profile-Corner-18x18-AL



820002006600
LEDDriver 24V-150W-DALI-IP67



820002006700
LEDDriver 24V-240W-DALI-IP67



820003004000
LEDDriver 24V-150W-10V/PWM-IP67



820003004100
LEDDriver 24V-240W-10V/PWM-IP67



806098004600
LEDStrip Silicone-Kit-IP67



806098004700
LEDStrip Mounting-Kit-10-IP67

Packaging information

Item			Box			
Item Code	Item Description	EU HS Code	Dimensions (mm) (LxWxH)	Gross Weight (pc/kg)	EAN	pc/box
806001008900	LEDStrip-E 14.4W-940-1800-IP67	94054239	240x220x14	0.34	6941491788647	1
806098002000	LEDStrip Profile-SF-15x15-AL	94059900	2050x33x33	0.20	6931783054406	1
806098002100	LEDStrip Profile-SF-15x15-BL	94059900	2050x33x33	0.20	6931783054413	1
806098002200	LEDStrip Profile-SF-17x7-AL	94059900	2050x33x33	0.20	6931783054420	1
806098002300	LEDStrip Profile-SF-17x7-BL	94059900	2050x33x33	0.20	6931783054437	1
806098002500	LEDStrip Profile-RC-15x15-AL	94059900	2050x33x33	0.20	6931783054451	1
806098002600	LEDStrip Profile-Corner-18x18-AL	94059900	2050x33x33	0.20	6931783054468	1
820009008100	LEDDriver 24V-120W	85369010	298x50x38	0.23	6941491787398	1
820009008200	LEDDriver 24V-160W	85369010	298x50x38	0.28	6941491787404	1
820009008300	LEDDriver 24V-240W	85369010	335x50x38	0.28	6941491787411	1
820002006300	LEDDriver 24V-150W-DALI/10V/PWM	85369010	301x46x37	0.44	6941491788210	1
820002006400	LEDDriver 24V-240W-DALI/10V/PWM	85369010	366x46x37	0.63	6941491788227	1
820002006600	LEDDriver 24V-150W-DALI-IP67	85369010	310x82x27	0.83	6941491788241	1
820002006700	LEDDriver 24V-240W-DALI-IP67	85369010	290x85x31	1.08	6941491788258	1
820003004000	LEDDriver 24V-150W-10V/PWM-IP67	85369010	310x82x27	0.85	6941491788272	1
820003004100	LEDDriver 24V-240W-10V/PWM-IP67	85369010	290x85x31	1.08	6941491788289	1
806098004600	LEDStrip Silicone-Kit-IP67	32141010	18x12x11	0.04	6931783054369	1
806098004700	LEDStrip Mounting-Kit-10-IP67	39174000	18x12x5	0.04	6931783054376	1

Technical Specifications

Lifetime (L70)	50,000
Dimmability	DALI2 / 1-10V / PWM
Colour rendering index (CRI)	> 90
Ingress Protection (IP)	IP67
Risk group (EN 62471)	RG0
With control gear	False

Electrical Supply


Frequency	50 - 60
Nominal voltage	220 - 240

Mechanical Properties

[Length]	5000
----------	------

Ambient Conditions

Operating temperature	-10 - 45 °C
Application temperature	25 °C
Storage environment	-25 - 50 °C

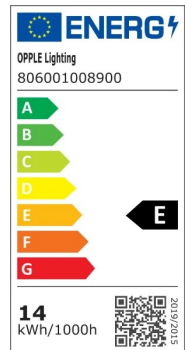

Dimensional Drawing (mm)

