



Floodlight Olympus G2

- Powerful professional floodlighting solution for Sports and Area lighting
- All-in-one LED driver with flexible mounting methods and 220-400VAC power input
- Standard compatible with DALI2 / 1-10V / DMX dimming
- Robust design: full IP66 and IK08 protection, including safety cable
- Equipped with breather to prevent condensation



## Specifications

| Item Code            | Item Description                   | Equivalent to (W) | Power (W) | Lumen Efficacy (lm/W) | CCT (K) | Beam angle | Net Weight (kg/pc) |
|----------------------|------------------------------------|-------------------|-----------|-----------------------|---------|------------|--------------------|
| Driver possibilities |                                    |                   |           |                       |         |            |                    |
| 720001010000         | FloodOly-P2 Driver-600W-DA/10V/DMX |                   | 600       |                       |         |            | 5.52               |

## Packaging information

| Item         |                                    |            | Box                     |                      |               |        |
|--------------|------------------------------------|------------|-------------------------|----------------------|---------------|--------|
| Item Code    | Item Description                   | EU HS Code | Dimensions (mm) (LxWxH) | Gross Weight (kg/pc) | EAN           | pc/box |
| 720001010000 | FloodOly-P2 Driver-600W-DA/10V/DMX | 85369010   | 515x230x210             | 6.80                 | 6941491785677 | 1      |

### Technical Specifications

Dimmability DALI2 / 1-10V / DMX

Ingress Protection (IP) IP66

Impact strength (IK) IK08

Protection class I

With control gear True

Power factor  $\geq 0.95$

### Electrical Supply

Nominal voltage 200 - 528 V

### Mechanical Properties


Housing material Aluminium

### Ambient Conditions


Application 25 °C  
temperature





Dimensional Drawing (mm)

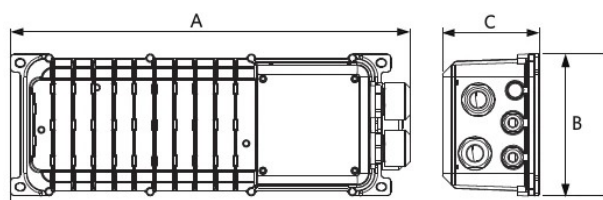

| Type   | A   | B   | C   |
|--------|-----|-----|-----|
| Driver | 443 | 157 | 102 |

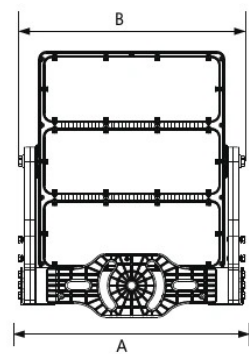

|       | A   | B   | C   | D   | E   |
|-------|-----|-----|-----|-----|-----|
| 1000W | 612 | 594 | 931 | 701 | 356 |
| 1200W | 612 | 594 | 931 | 701 | 356 |



| Type | A   | B   | C   | D   | E   |
|------|-----|-----|-----|-----|-----|
| 600W | 612 | 594 | 819 | 607 | 356 |
| 800W | 612 | 594 | 836 | 607 | 356 |

