



Floodlight Olympus G2

- Powerful professional floodlighting solution for Sports and Area lighting
- All-in-one LED driver with flexible mounting methods and 220-400VAC power input
- Standard compatible with DALI2 / 1-10V / DMX dimming
- Robust design: full IP66 and IK08 protection, including safety cable
- Equipped with breather to prevent condensation



## Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen Efficacy (lm/W)	CCT (K)	Beam angle	Net Weight (kg/pc)
Driver possibilities							
720001010800	FloodOly-P2 Driver-1000W-DA/10V/DMX-XAS		1000				5.8

## Packaging information

Item				Box			
Item Code	Item Description	EU HS Code	Dimensions (mm) (LxWxH)	Gross Weight (kg/pc)	EAN	pc/box	
720001010800	FloodOly-P2 Driver-1000W-DA/10V/DMX-XAS	85369010	515x230x210	6.80	6941491785875	1	

### Technical Specifications

Dimmability DALI2 / 1-10V / DMX

Ingress Protection (IP) IP66

Impact strength (IK) IK08

Protection class I

With control gear True

Power factor  $\geq 0.95$

### Electrical Supply

Nominal voltage 200 - 528 V

### Mechanical Properties


Housing material Aluminium

### Ambient Conditions


Application 25 °C  
temperature





# Dimensional Drawing (mm)

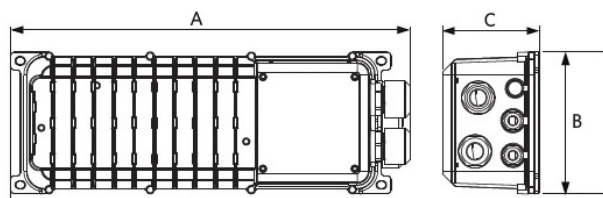

Type	A	B	C
Driver	443	157	102

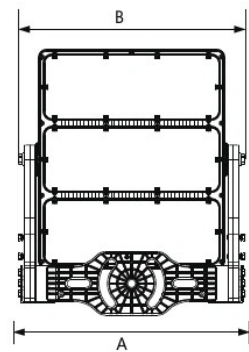

	A	B	C	D	E
1000W	612	594	931	701	356
1200W	612	594	931	701	356



Type	A	B	C	D	E
600W	612	594	819	607	356
800W	612	594	836	607	356

