



## Highbay EcoMax G4

- Cost effective dimmable highbay solution with elegant slim design
- Improved efficacy of 170 lm/W
- Reflectors, bracket and IP68 connector available as accessory
- Up to 60% energy saving compared to HID solutions



## Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	CCT (K)	Beam angle	Net Weight (pc/kg)
DALI2								
545006007100	LEDHighbay-E4 200W-840-W-DALI	HID 600W	200	34000	170	4000	100°	3.38

## Accessories



543098022000  
LEDFixture-IP68-  
Connector-Kit-5

545098011700  
LEDHighbay-P6 Bracket

## Packaging information

Item			Box			
Item Code	Item Description	EU HS Code	Dimensions (mm) (LxWxH)	Gross Weight (pc/kg)	EAN	pc/box
545006007100	LEDHighbay-E4 200W-840-W-DALI	94051190	426x426x131	4.28	6941491786438	1
543098022000	LEDFixture-IP68-Connector-Kit-5	39174000	265x245x205	0.08	6941497708984	1
545001123300	LEDHighbay-P6 Reflector D390	94059900	563x563x230	10.00	6941491748887	1
545098011700	LEDHighbay-P6 Bracket	94051190	363x363x65	0.30	6941491748931	1

### Technical Specifications

Lifetime (L70)	100,000 h
Lifetime (L80)	70,000 h
On-/Off-cycles	100,000
Colour consistency (SDCM)	4
Dimmability	DALI2
Finishing	Grey Pantone 417U
Colour rendering index (CRI)	> 80
Efficacy (lm/W)	170 lm/W
Ingress Protection (IP)	IP66
Impact strength (IK)	IK08
Protection class	I
Risk group (EN 62471)	RG1
With control gear	True
Glow wire test	850 °C
Driver failure rate (at 5,000 hrs)	≤ 1 %
Power factor	≥ 0.95
Surge protection (kV)	4 kV

### Electrical Supply

Frequency	50 - 60 Hz
Nominal voltage	220 - 240 V
DC input voltage	No
230V Cable length	1 m

### Mechanical Properties


Housing material	Aluminium
Optical material	Polycarbonate
Cover material	Polycarbonate

### Ambient Conditions


Operating temperature	-30 - 50 °C
Application temperature	25 °C
Storage environment	-30 - 60 °C



## Dimensional Drawing (mm)



Type	A	B
130W	336	97
200W	390	97

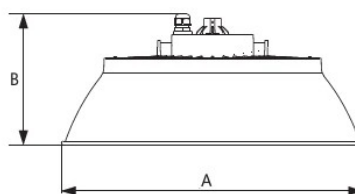

Type	A	B
Reflector Rd336	474	205
Reflector Rd390	550	228

## Photometric Data

