



Panel Vienna

- Design low glare LED panel
- Comfortable lighting for study and work environment (UGR < 16)
- Standard equipped with CCT-switch and CRI90
- Compatible with Slim Panel surface mounting kit accessory










Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen Efficacy (lm/W)	CCT (K)	Net Weight (pc/kg)
DALI2						
542003174000	LEDVienna-P Sq595-32W-DALI-930/940-U16	TL 4x18W	32	4000 125	3K/4K	1.7

Available on request with Wieland GST18 or WAGO WINSTA connector, or Euro/Schuko plug. Emergency lighting available on request. BLE versions in surface mounting frames might lead to limited BLE signal strength.

Accessories

Recessed Mounting Frame		Surface Mounting Frame		
				
542098009600 LEDPanelRc Sq600-Frame-WH	542098017600 LEDPanelRc2 Sq600-Surface-Kit-WH			
				
140060852 LEDFixture-Ceiling-Cable-Kit-0.5m	542003021700 LEDPanelRc-S-B2 Suspension-Kit	542003021800 LEDPanelRc-S-B2 Mounting-Springs	542098000800 LEDPanelRC-SI U19 EM-kit 1h	542098030700 Junction-Box-WH

Packaging information

Item			Box			
Item Code	Item Description	EU HS Code	Dimensions (mm) (LxWxH)	Gross Weight (pc/kg)	EAN	pc/box
542003174000	LEDVienna-P Sq595-32W-DALI-930/940-U16	94051190	617x704x42	2.85	6941491729701	1
140060852	LEDFixture-Ceiling-Cable-Kit-0.5m	73121020	510x100x10	0.40	6956321895266	1
542003021700	LEDPanelRc-S-B2 Suspension-Kit	73121049	315x315x25	0.13	6941408821665	1
542003021800	LEDPanelRc-S-B2 Mounting-Springs	73209090	280x200x170	0.10	6941408821672	1
542098000800	LEDPanelRC-SI U19 EM-kit 1h	85044083	490x390x150	0.98	6941497702340	1
542098000900	LEDPanelRC-SI U19 EM-kit 3h	85044083	490x390x150	1.08	6941497702333	1
542098009600	LEDPanelRc Sq600-Frame-WH	94059900	688x88x694	1.79	6941497704061	1
542098017600	LEDPanelRc2 Sq600-Surface-Kit-WH	94059900	685x77x68	1.53	6941497720696	1
542098030700	Junction-Box-WH	85369010	43x103x36	0.06	6941408868684	1

Technical Specifications

Lifetime (L70)	100,000 h
Lifetime (L80)	70,000 h
On-/Off-cycles	100,000
Colour consistency (SDCM)	4
Dimmability	DALI2
Beam angle	90 °
Finishing	White RAL9003
RAL-Number	9003
Colour rendering index (CRI)	> 90
UGR	16
Ingress Protection (IP)	IP20
Impact strength (IK)	IK03
Protection class	II
Risk group (EN 62471)	RG0
With control gear	True
Glow wire test	650 °C
Driver failure rate (at 5,000 hrs)	≤ 1 %
Power factor	≥ 0.9

Electrical Supply


Frequency	50 - 60 Hz
Nominal voltage	220 - 240 V
DC input voltage	See catalogue appendix Connection Specifications

Mechanical Properties


Housing material	Aluminium
Optical material	Polycarbonate

Ambient Conditions


Operating temperature	-10 - 45 °C
Application temperature	25 °C
Storage environment	-25 - 50 °C

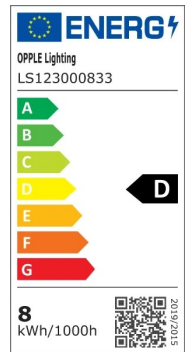


Dimensional Drawing (mm)

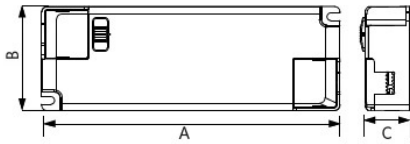

	A	B	C
On/Off	160	56	24
Dim	180	51	31

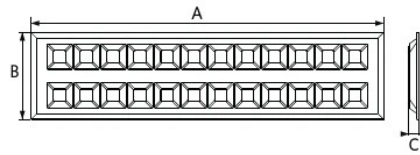

Type	A	B	C
Re295	1195	295	35

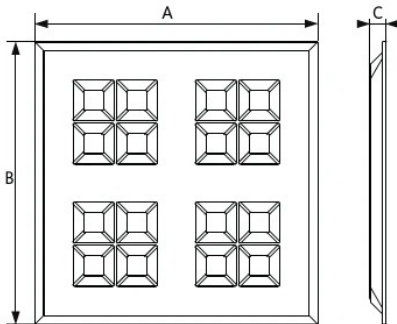

Type	A	B	C
Sq595	595	595	35

Photometric Data

