



Wall-Mounted Performer G2

- Robust, waterproof IP65 luminaire with high impact protection (IK10)
- Integrated CCT switch for color selection (3000K-4000K)
- Easy to install due to through-wiring possibility
- Suitable for both indoor and outdoor applications



Specifications

| Item Code | Item Description | Equivalent to (W) | Power (W) | Lumen (lm) | Efficacy (lm/W) | CCT (K) | Sensor | Net Weight (kg/pc) |
|--------------|-------------------------------|-------------------|-----------|-------------|-----------------|---------|--------|--------------------|
| 531002003100 | LEDWM-P2 Rd320-14/19W-830/840 | CFL 2x26W | 14 - 19 | 1960 - 2660 | 140 | 3K/4K | No | 0.978 |

Packaging information

| Item | | | Box | | | |
|--------------|-------------------------------|------------|-------------------------|----------------------|---------------|--------|
| Item Code | Item Description | EU HS Code | Dimensions (mm) (LxWxH) | Gross Weight (kg/pc) | EAN | pc/box |
| 531002003100 | LEDWM-P2 Rd320-14/19W-830/840 | 94051190 | 330x325x81 | 1.08 | 6941491789002 | 1 |

Technical Specifications

| | |
|------------------------------------|-----------------|
| Lifetime (L70) | 100,000 h |
| Lifetime (L80) | 70,000 h |
| On-/Off-cycles | 100,000 |
| Colour consistency (SDCM) | 4 |
| Dimmability | On-Off |
| Sensor type | No sensor |
| Sensor technology | No sensor |
| CCT (K) | 3,000 - 4,000 K |
| Finishing | White RAL9003 |
| RAL-Number | 9003 |
| Colour rendering index (CRI) | > 80 |
| Ingress Protection (IP) | IP65 |
| Impact strength (IK) | IK10 |
| Protection class | II |
| Risk group (EN 62471) | RG1 |
| With control gear | True |
| Glow wire test | 650 °C |
| Driver failure rate (at 5,000 hrs) | ≤ 0.05 % |
| Power factor | ≥ 0.9 |

Electrical Supply


| | |
|------------------|-----------------------------------------------------|
| Frequency | 50 - 60 Hz |
| Nominal voltage | 220 - 240 V |
| DC input voltage | See catalogue appendix Connection Specifications |

Mechanical Properties

| | |
|------------------|---------------|
| Housing material | Polycarbonate |
| Optical material | Polycarbonate |

Ambient Conditions

| | |
|-------------------------|-------------|
| Operating temperature | -20 - 50 °C |
| Application temperature | 25 °C |
| Storage environment | -30 - 60 °C |

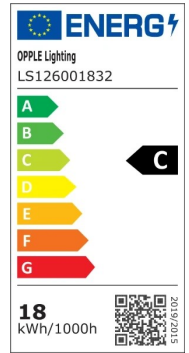

Photometric Data

