



Wall-Mounted Performer G2

- Robust, waterproof IP65 luminaire with high impact protection (IK10)
- Integrated CCT switch for color selection (3000K-4000K)
- Easy to install due to through-wiring possibility
- Suitable for both indoor and outdoor applications



Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	CCT (K)	Sensor	Net Weight (pc/kg)
Emergency kit 3 hour/Motion Detection/Daylight Detection								
531002003600	LEDWM-P2 Rd320-14/19W-830/840-MD-EM3	CFL 2x26W	14 - 19	1960 - 2660	140	3K/4K	Yes	1.223

Packaging information


Item			Box			
Item Code	Item Description	EU HS Code	Dimensions (mm) (LxWxH)	Gross Weight (pc/kg)	EAN	pc/box
531002003600	LEDWM-P2 Rd320-14/19W-830/840-MD-EM3	94051190	330x325x81	1.32	6941491789057	1

Technical Specifications	
Lifetime (L70)	100,000 h
Lifetime (L80)	70,000 h
On-/Off-cycles	100,000
Colour consistency (SDCM)	4
Dimmability	Sensor controlled (MD)
Sensor type	Motion + Daylight detection (MD)
Sensor technology	Microwave (MW)
CCT (K)	3,000 - 4,000 K
Finishing	White RAL9003
RAL-Number	9003
Colour rendering index (CRI)	> 80
Ingress Protection (IP)	IP65
Impact strength (IK)	IK10
Protection class	II
Risk group (EN 62471)	RG1
With control gear	True
Glow wire test	650 °C
Driver failure rate (at 5,000 hrs)	≤ 0.05 %
Power factor	≥ 0.9


Electrical Supply	
Frequency	50 - 60 Hz
Nominal voltage	220 - 240 V
DC input voltage	See catalogue appendix Connection Specifications

Mechanical Properties	
Housing material	Polycarbonate
Optical material	Polycarbonate

Ambient Conditions	
Operating temperature (EM)	0 - 50 °C
Application temperature	25 °C
Storage environment	-20 - 40 °C
Storage environment (EM)	0 - 60 °C

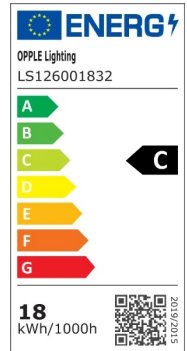

Dimensional Drawing (mm)

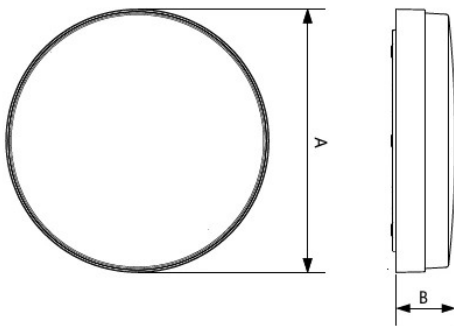

A	B
320	78

Photometric Data

