




## Wall-Mounted Performer G2

- Robust, waterproof IP65 luminaire with high impact protection (IK10)
- Flexible due to integrated power switch
- DALI2 and Smart Lighting (BLE2) versions available
- MD-versions with 2-step dimming (movement always necessary for switching on luminaire)
- One Wall-Mounted with sensor (MD) can control up to 9 Wall-Mounted fixtures
- 3 hour emergency kit versions available (EM3)
- Integrated CCT switch for color selection (3000K-4000K)
- Easy to install due to through-wiring possibility
- Suitable for both indoor and outdoor applications

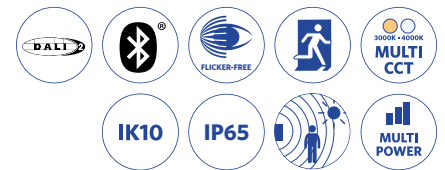

## Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	CCT (K)	Sensor	Net Weight (kg/pc)
<b>On-Off</b>								
531002003100	LEDWWM-P2 Rd320-14/19W-830/840	CFL 2x26W	14 - 19	1960 - 2660	140	3K/4K	No	0.978
<b>Motion Detection/Daylight Detection</b>								
531002003500	LEDWWM-P2 Rd320-14/19W-830/840-MD	CFL 2x26W	14 - 19	1960 - 2660	140	3K/4K	Yes	1.149
<b>DALI2</b>								
531002003300	LEDWWM-P2 Rd320-19W-DALI-830/840	CFL 2x26W	19	2660	140	3K/4K	No	1.098
<b>Smart</b>								
531002003400	LEDWWM-P2 Rd320-19W-BLE2-830/840	CFL 2x26W	19	2660	140	3K/4K	No	1.098
<b>Emergency kit 3 hour/On-Off</b>								
531002003200	LEDWWM-P2 Rd320-14/19W-830/840-EM3	CFL 2x26W	14 - 19	1960 - 2660	140	3K/4K	No	1.052
<b>Emergency kit 3 hour/Motion Detection/Daylight Detection</b>								
531002003600	LEDWWM-P2 Rd320-14/19W-830/840-MD-EM3	CFL 2x26W	14 - 19	1960 - 2660	140	3K/4K	Yes	1.223
<b>Emergency kit 3 hour/DALI2</b>								
531002002400	LEDWWM-P2 Rd320-19W-DALI-830/840-EM3	CFL 2x26W	19	2660	140	3K/4K	No	1.269
<b>Emergency kit 3 hour/Smart</b>								
531002002500	LEDWWM-P2 Rd320-19W-BLE2-830/840-EM3	CFL 2x26W	19	2660	140	3K/4K	No	1.269

### Technical Specifications

Lifetime (L70)	100,000 h
Lifetime (L80)	70,000 h
On-/Off-cycles	100,000
Colour consistency (SDCM)	4
Dimmability	On-Off / Sensor controlled (MD) / DALI2 / BLE2
Sensor type	Motion + Daylight detection (MD)
Sensor technology	No sensor / Microwave (MW)
Finishing	White RAL9003
RAL-Number	○ 9003
Colour rendering index (CRI)	> 80
Ingress Protection (IP)	IP65
Impact strength (IK)	IK10
Protection class	II
Risk group (EN 62471)	RG1
With control gear	Yes
Glow wire test	650°C
Driver failure rate (at 5,000 hrs)	< 0.05%
Power factor	> 0.9

### Electrical Supply

Frequency	50 - 60 Hz
Nominal voltage	220 - 240 V
DC input voltage	See catalogue appendix Connection Specifications

### Mechanical Properties


Housing material	Polycarbonate
Optical material	Polycarbonate

### Ambient Conditions

Operating temperature	-20 - 50°C
Operating temperature (MD)	-30 - 50°C
Operating temperature (EM)	0 - 50°C
Application temperature	25°C
Storage environment	-30 - 60,-20 - 40°C
Storage environment (EM)	0 - 60°C



## Dimensional Drawing (mm)

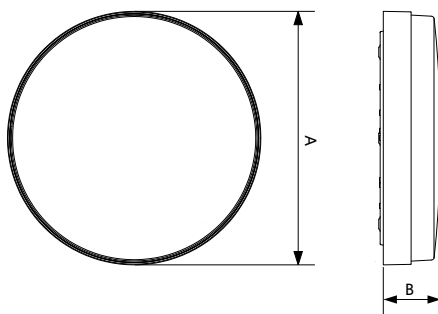

A	B
320	78