



Mirror Light

- Decorative wall luminaire with delicate design
- IP44 waterproof, suitable for bathrooms and comparable spaces
- Excellent lighting uniformity
- Integrated CCT switch for color selection (3000K-4000K)
- Multiple length versions available



Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	CCT (K)	Beam angle	Net Weight (kg/pc)
On-Off								
521028002600	LEDLinear-Bali L600 8W-830/840-WH	TL 1x18W	8	960	120	3K/4K	160	0.59
521028002700	LEDLinear-Bali L900 12W-830/840-WH	TL 1x18W	12	1440	120	3K/4K	160	0.8
521028002800	LEDLinear-Fiji L600 12W-830/840-BL	TL 1x18W	12	1560	130	3K/4K	160	1
521028002900	LEDLinear-Fiji L900 20W-830/840-BL	TL 1x18W	20	2600	130	3K/4K	160	1.3
521028003000	LEDLinear-Java L580 10W-830/840-WH	TL 1x18W	10	1200	130	3K/4K	110	0.7

Technical Specifications

Lifetime (L70)	50,000 h
On-/Off-cycles	100,000
Dimmability	On-Off
Finishing	White RAL9003 / Black RAL 9004
Colour rendering index (CRI)	> 80
Ingress Protection (IP)	IP44
Impact strength (IK)	IK02
Protection class	I
Risk group (EN 62471)	RG0
With control gear	Yes
Glow wire test	750°C
Driver failure rate (at 5,000 hrs)	< 1%
Power factor	> 0.9

Electrical Supply

Frequency	50 - 60 Hz
Nominal voltage	220 - 240 V
DC input voltage	No

Mechanical Properties

Housing material	Plastic / Aluminium
Optical material	Polycarbonate


Ambient Conditions

Operating temperature	-10 - 45°C
Application temperature	25°C
Storage environment	-25 - 50°C





LED Mirror Light - Bali

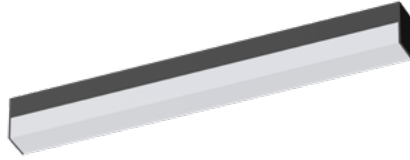


LED Mirror Light - Fiji




LED Mirror Light - Java

Dimensional Drawing (mm)

Bali	A	B	C
8W	600	182	82
12W	900	182	82

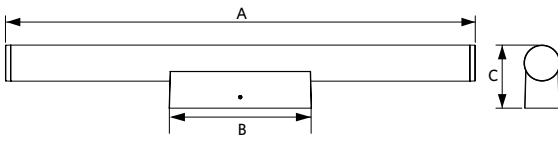

Fiji	A	B	C
12W	600	72	46
20W	900	72	46

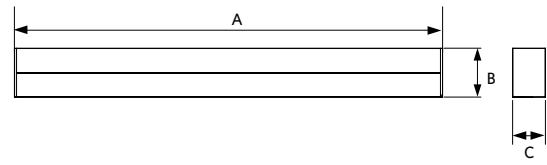

Java	A	B	C
10W	580	72	66

