



Emergency Exit Sign

- Easily update signage with interchangeable pictograms included in the package
- Suitable for both IP20 and IP65-rated applications, ensuring compatibility with various environments
- Equipped with a high-performance LiFePO4 battery, providing 3 hours of reliable operation
- Includes a range of accessories to support diverse mounting methods



Specifications

Item Code	Item Description	Lumen	CCT (K)	RAL-Number	Viewing distance	Net Weight (kg/pc)
Emergency kit 3 hour/Auto-Testing						
572005002000	LEDExit-Sign-E 3W-AT-EM3-WH	20	6500	9003	33	0.7

Accessories



572005002600
LEDExit-Sign-E Suspend-Kit-WH



572005002800
LEDExit-Sign-E Recessed-Kit-WH

Packaging information


Item			Box			
Item Code	Item Description	EU HS Code	Dimensions (mm) (LxWxH)	Gross Weight (kg/pc)	EAN	pc/box
572005002000	LEDExit-Sign-E 3W-AT-EM3-WH	94051190	350x260x50	0.80	6941491790312	1
572005002600	LEDExit-Sign-E Suspend-Kit-WH	94059900	290x51x47	0.28	6941491790374	1
572005002800	LEDExit-Sign-E Recessed-Kit-WH	94059900	453x110x80	0.31	6941491790398	1

Technical Specifications	
Finishing	White RAL9003
Ingress Protection (IP)	IP20
Protection class	II
Monitoring equipment	Automatic self test
Power supply system	Peripheral (individual battery)
Battery composition	Lithium ion
Max. battery duration	3

Electrical Supply	
Nominal voltage	200 - 240 V
Battery voltage	6.4
Mechanical Properties	
Housing material	Polycarbonate
Cover material	Polycarbonate
Ambient Conditions	
Operating temperature	0 - 45
Application temperature	25
Storage environment	0 - 60



Dimensional Drawing (mm)

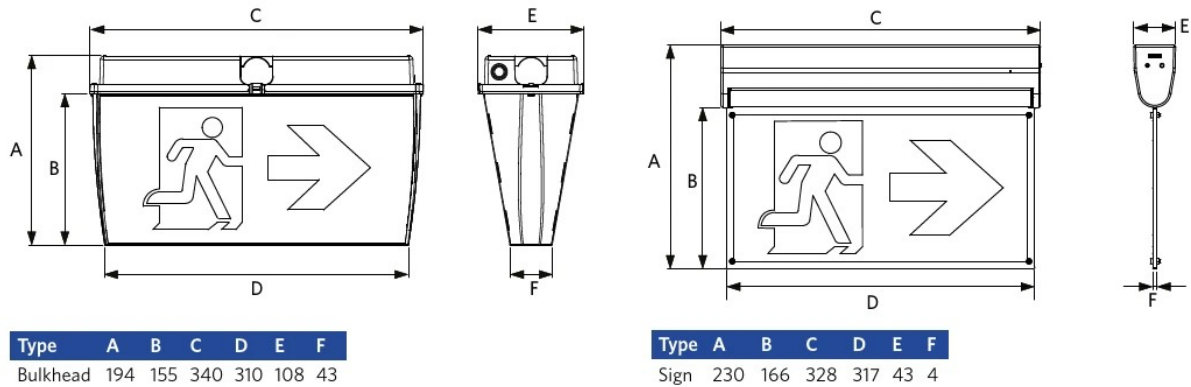

Photometric Data

