



Emergency Exit Sign

- Easily update signage with interchangeable pictograms included in the package
- Suitable for both IP20 and IP65-rated applications, ensuring compatibility with various environments
- Equipped with a high-performance LiFePO4 battery, providing 3 hours of reliable operation
- Includes a range of accessories to support diverse mounting methods



Specifications

Item Code	Item Description	Lumen	CCT (K)	RAL-Number	Viewing distance	Net Weight (kg/pc)
Emergency kit 3 hour/Auto-Testing						
572005003800	LEDExit-Bulkhead-E 6W-AT-EM3-WH-IP65	150	6500	9003	31	1.1

Accessories



572005004000
LEDExit-Bulkhead-E
Recessed-Kit-IP65

Packaging information


Item			Box			
Item Code	Item Description	EU HS Code	Dimensions (mm) (LxWxH)	Gross Weight (kg/pc)	EAN	pc/box
572005003800	LEDExit-Bulkhead-E 6W-AT-EM3-WH-IP65	94051190	350x110x200	1.20	6941491790282	1
572005004000	LEDExit-Bulkhead-E Recessed-Kit-IP65	94059900	380x156x40	0.54	6941491790305	1

Technical Specifications	
Finishing	White RAL9003
Ingress Protection (IP)	IP65
Protection class	II
Monitoring equipment	Automatic self test
Power supply system	Peripheral (individual battery)
Battery composition	Lithium ion
Max. battery duration	3


Electrical Supply	
Nominal voltage	200 - 240 V
Battery voltage	6.4
Mechanical Properties	
Housing material	Polycarbonate
Cover material	Polycarbonate
Ambient Conditions	
Operating temperature	0 - 45
Application temperature	25
Storage environment	0 - 60



Dimensional Drawing (mm)

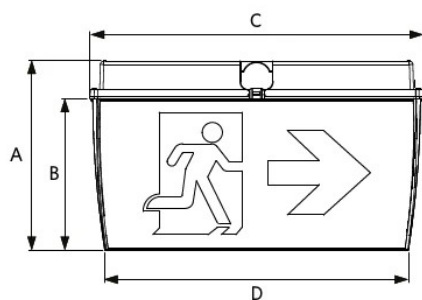

Type	A	B	C	D	E	F
Bulkhead	194	155	340	310	108	43

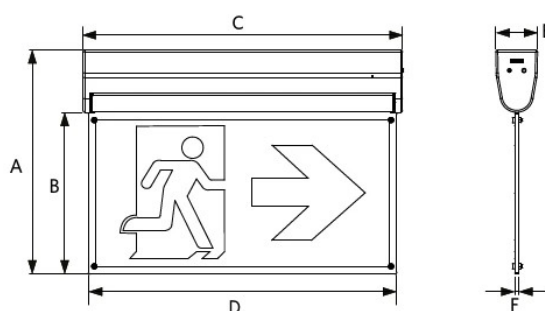

Type	A	B	C	D	E	F
Sign	230	166	328	317	43	4

Photometric Data

