
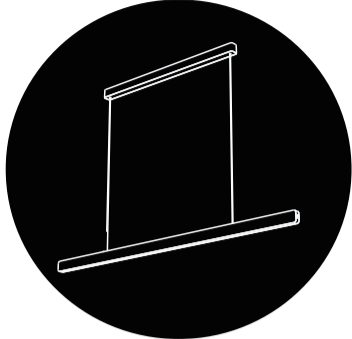
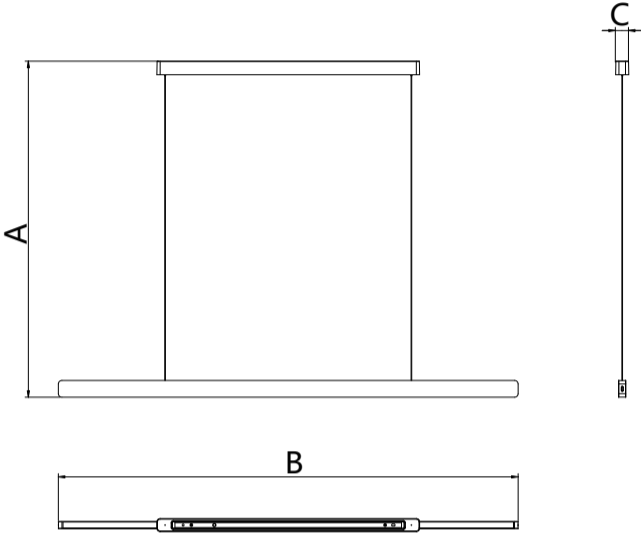




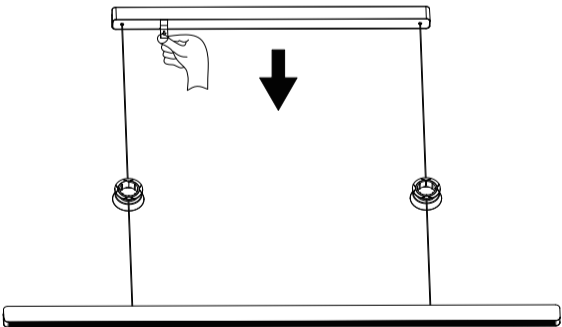
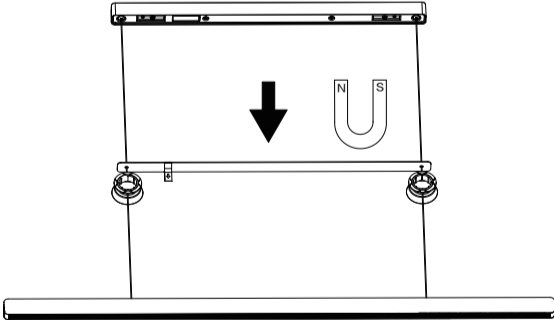
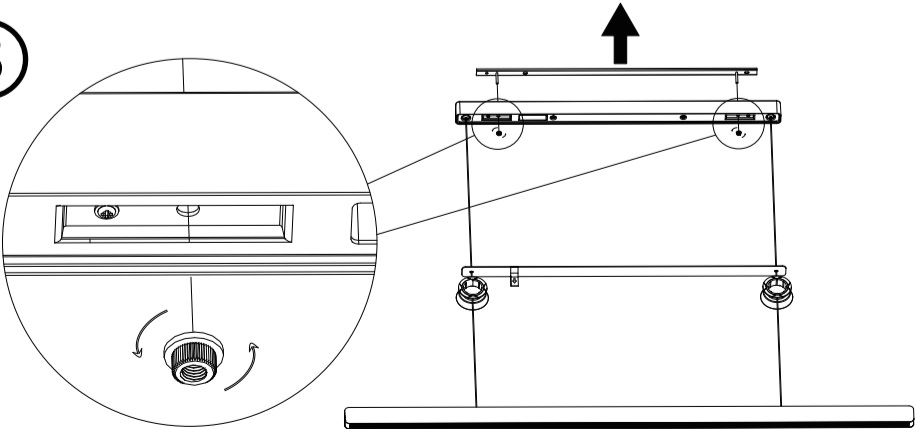
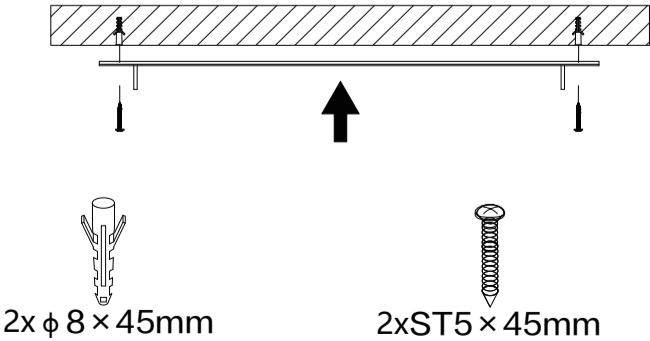
Item Code	Luminaire Description	CCT	 kg	
521026006300	LEDRingo SDL-S L1400-59W-BLE2-BL	1200K-18000K	3.8kg	

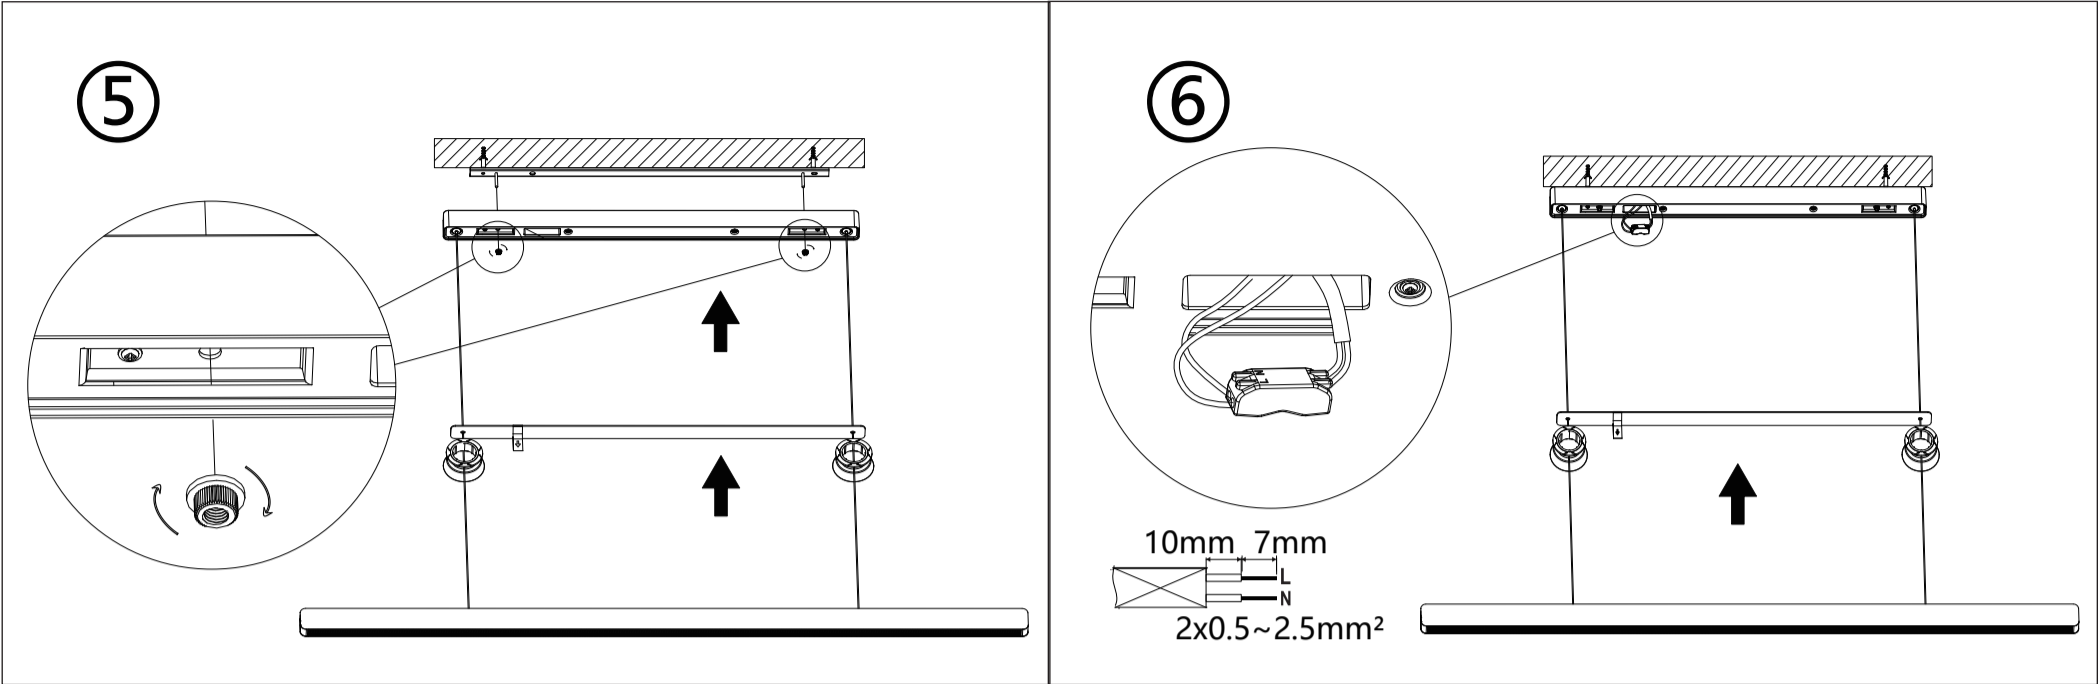
	Model	A (mm)	B (mm)	C (mm)
	LEDRingo L1400-59W-BLE2-BL	1500	1400	40

Light Source

Product Code	Product Description	N	Light source code	QR Code	Energy Label
521026006300	LEDRingo SDL-S L1400-59W-BLE2-BL	1	LS129005935-02		

Installation

<p>①</p> 	<p>②</p> 
<p>③</p> 	<p>④</p> 



⑦

Gesture Control

Gesture control is enabled by default in supported fixtures but can be disabled in the Smart APP or Smart Web UI.

① Sensing Distance

The gesture sensor works within 0-20 cm from the light.

② Lighting Mode

Wave your hand twice within 2 seconds to switch between direct or indirect light modes.

③ Turn On/Off

Wave your hand once to turn the light on or off.

④ Adjust Brightness

Move your hand closer to the light to dim it or farther away to brighten it. Stop moving your hand to maintain the brightness level.

⑤ Adjust Color Temperature(CCT)

Hover your hand over the sensor to change the light's color temperature. Remove your hand to lock the current setting.

⑥ Adjust Suspended Height

Hold the light with both hands and pull up or down to adjust the its height. Adjustable range: 50cm to 150cm.

The light source in this luminaire is not user-replaceable. It must only be replaced by the manufacturer, an authorized service agent, or a similarly qualified professional.

For type Y attachments:

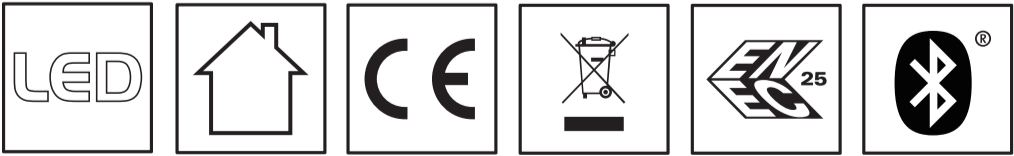
if the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.

Caution : Any operation is forbidden while power is on.

Indoor use only.

Ensure the luminaire is fully ceiling-mounted onto a solid, fire-resistant, and insulating surface. Avoid installing it on hollow or grid-like surfaces.

Ceiling luminaires, chandeliers, or other products exceeding 10 kg in weight must be installed on solid concrete ceilings. Use the provided screw accessory package for secure mounting.



Data subject to change
Les données sont sujettes à modifications
Änderungen vorbehalten

OPPLE Lighting Co., Ltd.
Room 411, Building 1 No. 6111,
Longdong Avenue, Pudong New District,
Shanghai City 201201,P. R. China
www.opple.com

Opple Lighting B.V.
Meerenakkerweg 1-07
5652 AR Eindhoven
The Netherlands
service@opple.com