



Reflector GU10 EcoMax G2

- Full retrofit of existing halogen GU10 lamps
- With light silver outer finish
- No UV/IR radiation
- Significantly lower heat output than halogen, avoiding discolouration and risk of damaging goods



Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen (lm)	Efficacy (lm/W)	CCT (K)	Net Weight (kg/pc)
Dimmable (Triac)							
800021001900	LEDGU10-E2 2.5W-DIM-830-36D	Halogen 25W	2.5	250	100	3000	0.033

Packaging information

Item			Box			
Item Code	Item Description	EU HS Code	Dimensions (mm) (LxWxH)	Gross Weight (kg/pc)	EAN	pc/box
800021001900	LEDGU10-E2 2.5W-DIM-830-36D	85395200	52x52x62	0.06	6937209605177	1
800021001900	LEDGU10-E2 2.5W-DIM-830-36D	85395200	75x113x275	1.90	6941491798196	30

Technical Specifications

Lifetime (L70)	25,000 h
On-/Off-cycles	50,000
Dimmability	Triac
Beam angle	36 °
Finishing	Silver
Colour rendering index (CRI)	> 80

Electrical Supply


Frequency	50 - 60 Hz
Nominal voltage	220 - 240 V
DC input voltage	No

Mechanical Properties


Housing material	Polybutylene terephthalate (PBT)
------------------	----------------------------------

Ambient Conditions

Operating temperature	-20 - 40 °C
Application temperature	25 °C
Storage environment	-25 - 50 °C

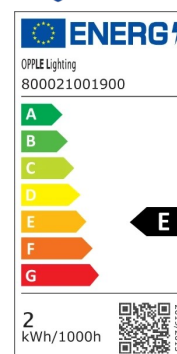

Dimensional Drawing (mm)

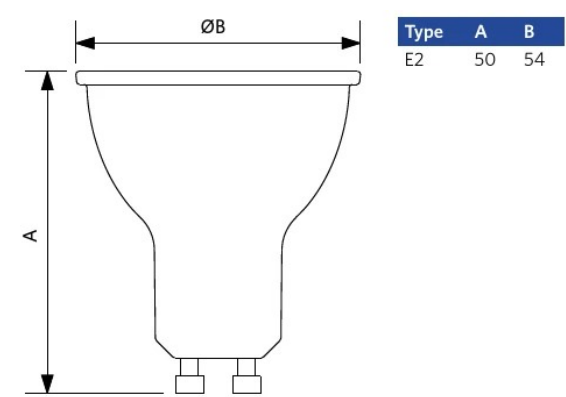

Photometric Data

