
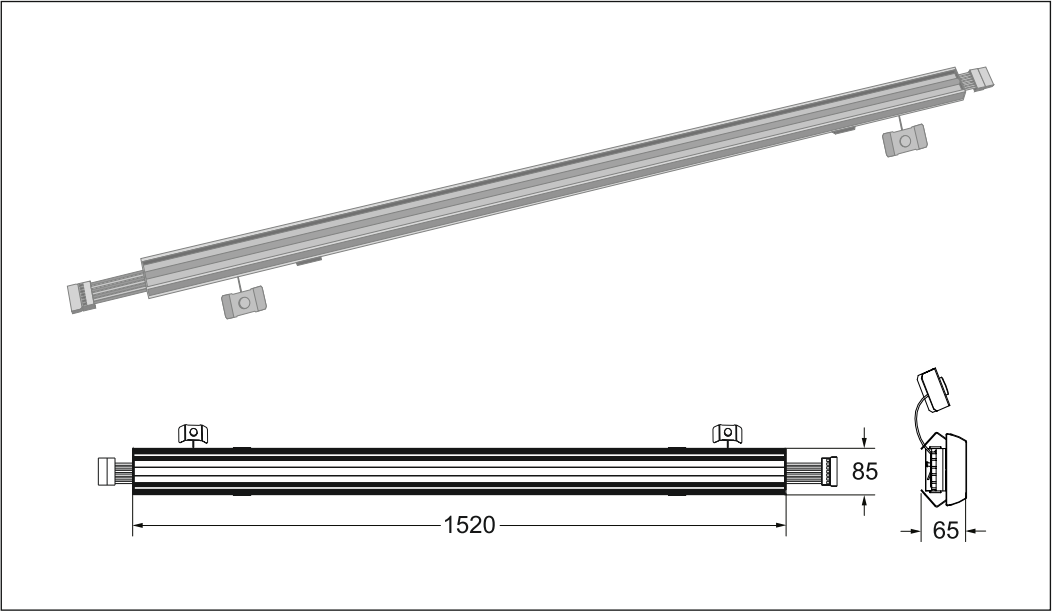
















Item Code	Luminaire Description	CCT	kg
531000033100	LEDTrunk-Uni-P L15-28W/46W-840-W	4000K	1.36kg
531000033200	LEDTrunk-Uni-P L15-68W/85W-840-W	4000K	1.36kg
531000033300	LEDTrunk-Uni-P L15-28W/46W-840-N	4000K	1.36kg
531000033400	LEDTrunk-Uni-P L15-68W/85W-840-N	4000K	1.36kg
531000033500	LEDTrunk-Uni-P L15-28W/46W-840-M	4000K	1.36kg
531000033600	LEDTrunk-Uni-P L15-68W/85W-840-M	4000K	1.36kg
531000033700	LEDTrunk-Uni-P L15-28W/46W-840-BW	4000K	1.36kg
531000033800	LEDTrunk-Uni-P L15-68W/85W-840-BW	4000K	1.36kg
531000033900	LEDTrunk-Uni-P L15-28W/46W-840-DF	4000K	1.36kg
531000034000	LEDTrunk-Uni-P L15-68W/85W-840-DF	4000K	1.36kg
531000034100	LEDTrunk-Uni-P L15-28W/46W-DALI-840-W	4000K	1.44kg
531000034200	LEDTrunk-Uni-P L15-68W/85W-DALI-840-W	4000K	1.44kg
531000034300	LEDTrunk-Uni-P L15-28W/46W-DALI-840-N	4000K	1.44kg
531000034400	LEDTrunk-Uni-P L15-68W/85W-DALI-840-N	4000K	1.44kg
531000034500	LEDTrunk-Uni-P L15-28W/46W-DALI-840-M	4000K	1.44kg
531000034600	LEDTrunk-Uni-P L15-68W/85W-DALI-840-M	4000K	1.44kg
531000034700	LEDTrunk-Uni-P L15-28W/46W-DALI-840-BW	4000K	1.44kg
531000034800	LEDTrunk-Uni-P L15-68W/85W-DALI-840-BW	4000K	1.44kg
531000034900	LEDTrunk-Uni-P L15-28W/46W-DALI-840-DF	4000K	1.44kg
531000035000	LEDTrunk-Uni-P L15-68W/85W-DALI-840-DF	4000K	1.44kg



LEDTrunk-Uni-P Standard compatibility


1	 41 mm 63 mm	TRILUX E-Line
2	 45 mm 60 mm	FLUOLITE TRX
3	 53 mm 69 mm	LUDWIG TR50W
4	 55 mm 68 mm	SITECO DUS
5	 55 mm 68 mm	REGIOLUX SMT
6	 48 mm 63.5 mm	REGIOLUX SDT/SPT
7	 51 mm 65 mm	RIDI VLG/VLT/SLG
8	 48 mm 63.5 mm	PHILIPS TTX400
9	 40 mm 61 mm	ZUMTOBEL ZX1
10	 40 mm 61 mm	ZUMTOBEL ZX2
11	 38 mm 83 mm	PHILIPS Maxos

LEDTrunk-Uni-P Compatibility with additional clamps

1	 51 mm 61 mm	ZUMTOBEL TECTON
2	 43 mm 58 mm	SITECO Modario
3	 41 mm 40 mm	PHILIPS TTX200
4	 46 mm 60 mm	VEKO PNR


**

13	VEKO	PNR
14	ZUMTOBEL	ZX1
15	ZUMTOBEL	ZX2

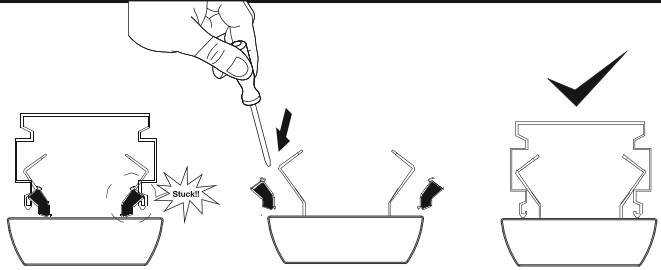

LEDTRUNK UNIVERSAL ON/OFF


Power setting for 28W/46W version

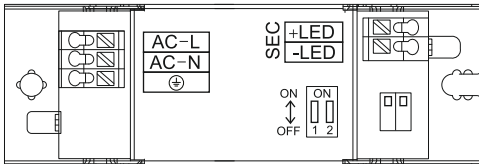

Power	Irated	1	2
28W	200mA	-	-
33W	250mA	-	ON
40W	300mA	ON	-
46W	350mA	ON	ON

Default

Power setting for 68W/85W version







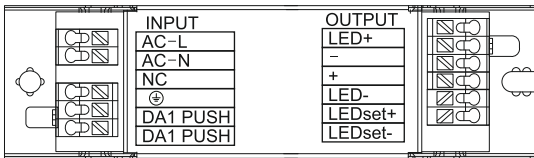


Power	Irated	1	2	3
29W	200mA	-	-	-
37W	250mA	-	-	ON
45W	300mA	-	ON	-
52W	350mA	-	ON	ON
60W	400mA	ON	-	-
68W	450mA	ON	-	ON
76W	500mA	ON	ON	-
85W	550mA	ON	ON	ON



Default

Model	L (mm)	W (mm)	H (mm)	Rated Voltage	Frequency	Rated Power (W)	Application Temperature { °C }	Energy Label	Light Source Code	QR Code
LEDTrunk-Uni-P L15-28W/46W-840-W	1520	85	65	220-240V~	50/60Hz	28W/46W	-20~+45		LS132004615	
LEDTrunk-Uni-P L15-28W/46W-840-N										
LEDTrunk-Uni-P L15-28W/46W-840-M										
LEDTrunk-Uni-P L15-28W/46W-840-BW										
LEDTrunk-Uni-P L15-28W/46W-840-DF										
LEDTrunk-Uni-P L15-28W/46W-DALI-840-W										
LEDTrunk-Uni-P L15-28W/46W-DALI-840-N										
LEDTrunk-Uni-P L15-28W/46W-DALI-840-M										
LEDTrunk-Uni-P L15-28W/46W-DALI-840-BW										
LEDTrunk-Uni-P L15-28W/46W-DALI-840-DF										
LEDTrunk-Uni-P L15-68W/85W-840-W						68W/85W		LS132008515		
LEDTrunk-Uni-P L15-68W/85W-840-N										
LEDTrunk-Uni-P L15-68W/85W-840-M										
LEDTrunk-Uni-P L15-68W/85W-840-BW										
LEDTrunk-Uni-P L15-68W/85W-840-DF										
LEDTrunk-Uni-P L15-68W/85W-DALI-840-W										
LEDTrunk-Uni-P L15-68W/85W-DALI-840-N										
LEDTrunk-Uni-P L15-68W/85W-DALI-840-M										
LEDTrunk-Uni-P L15-68W/85W-DALI-840-BW										
LEDTrunk-Uni-P L15-68W/85W-DALI-840-DF										





*Note: This product contains a light source of energy efficiency class(C).

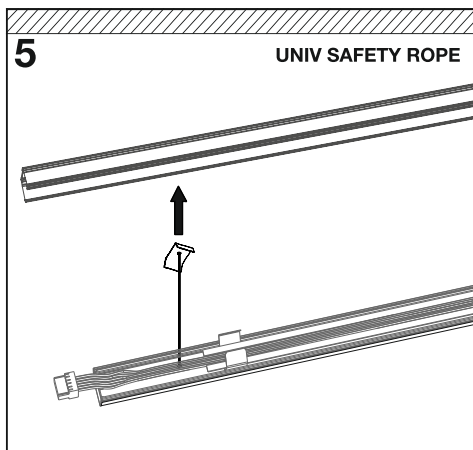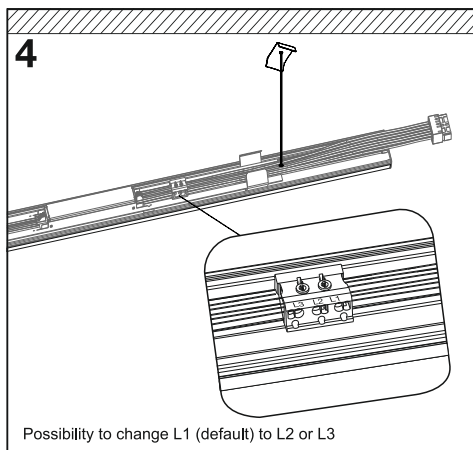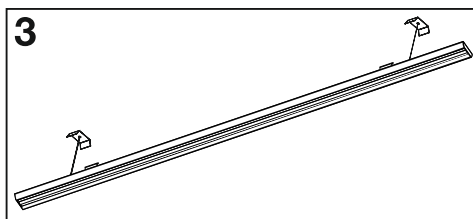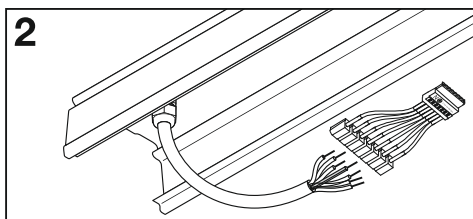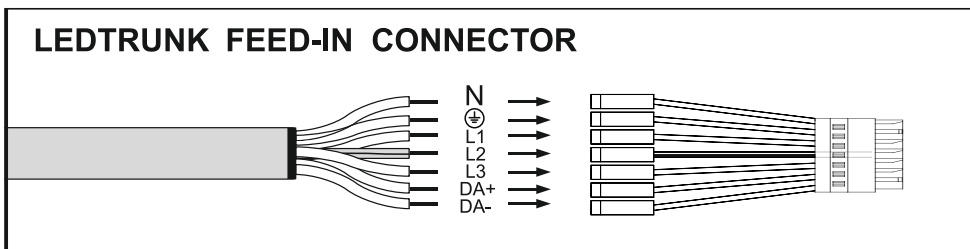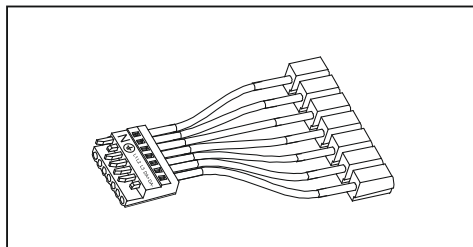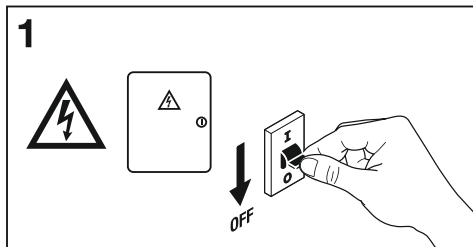


6-1

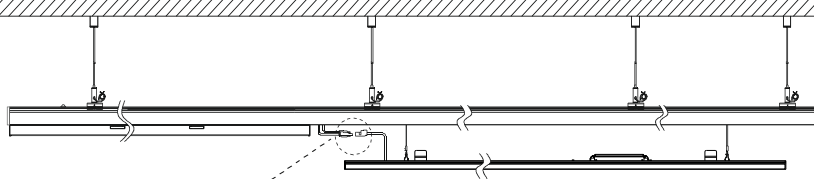

6-2

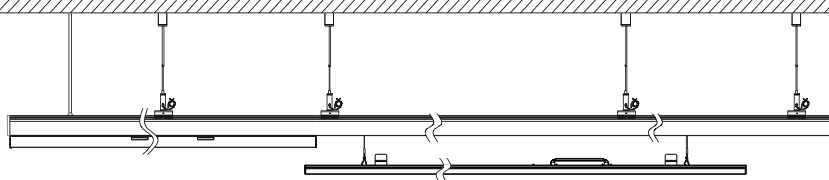


7-1

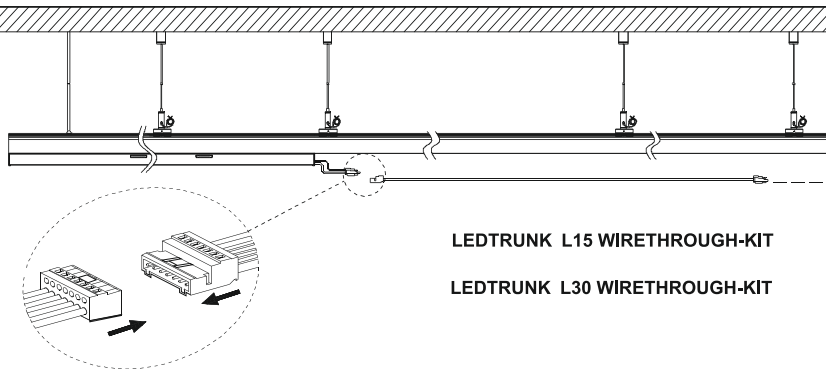


LEDTRUNK L15 WIRETHROUGH-KIT

LEDTRUNK L30 WIRETHROUGH-KIT


7-2

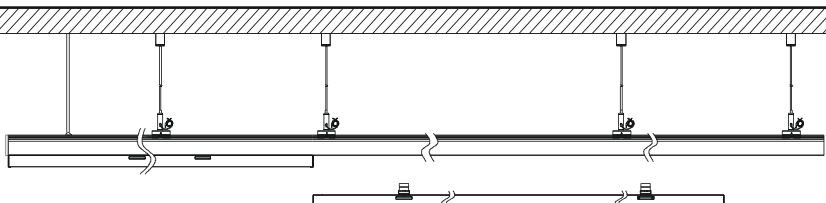





b




c



LEDTRUNK UNIV BLIND COVER

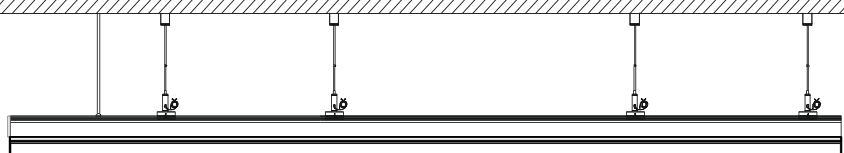




For non-user replaceable light sources.
The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.



Caution :Any operation is forbidden while power is on.
Indoor use only



For use in environments where normal non-conductive/
conductive dust accumulation may be expected, not for
use in environments with expected high/unusual dust
accumulation.



Data subject to change
Les données sont sujettes à modifications
Änderungen vorbehalten

OPPLE Lighting Co., Ltd.
Room 411, Building 1 No. 6111,
Longdong Avenue, Pudong New District,
Shanghai City 201201, P. R. China
www.opple.com

Opple Lighting B.V.
Meerenakkerweg 1-07
5652 AR Eindhoven
The Netherlands
service@opple.com