
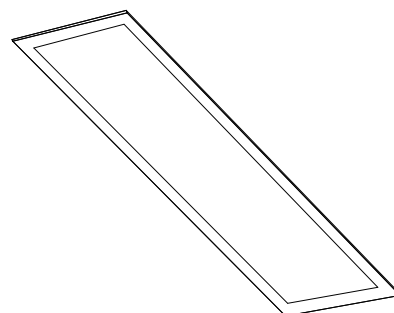


Slim Panel Performer G7


OPPLE

Version date 08-04-2025
www.opple.com



Item Code	Luminaire Description	CCT	kg
542016021100	LEDPanelS-P7 Sq595-29W-DALI-TW-U19	2700K-6500K	2.0kg
542016017600	LEDPanelS-P7 Re295-29W-DALI-TW-U19	2700K-6500K	2.1kg
542016016400	LEDPanelS-P7 Sq620-29W-DALI-TW-U19	2700K-6500K	2.2kg
542016020700	LEDPanelS-P7 Sq595-29W-BLE2-TW-U19	2700K-6500K	2.0kg
542016017500	LEDPanelS-P7 Re295-29W-BLE2-TW-U19	2700K-6500K	2.1kg
542016020800	LEDPanelS-P7 Sq620-29W-BLE2-TW-U19	2700K-6500K	2.2kg
542016020200	LEDPanelS-P7 Sq595-22/29W-830-U19	3000K	2.0kg
542016020000	LEDPanelS-P7 Sq595-22/29W-840-U19	4000K	2.0kg
542016016800	LEDPanelS-P7 Re295-22/29W-830-U19	3000K	2.1kg
542016018100	LEDPanelS-P7 Re295-22/29W-840-U19	4000K	2.1kg
542016018600	LEDPanelS-P7 Sq620-22/29W-830-U19	3000K	2.2kg
542016017000	LEDPanelS-P7 Sq620-22/29W-840-U19	4000K	2.2kg
542016018700	LEDPanelS-P7 Sq595-29W-BLE2-830-U19	3000K	2.0kg
542016018500	LEDPanelS-P7 Sq595-29W-BLE2-840-U19	4000K	2.0kg
542098055800	LEDPanelS-P7 Re295-29W-BLE2-830-U19	3000K	2.1kg
542016020100	LEDPanelS-P7 Re295-29W-BLE2-840-U19	4000K	2.1kg
542016019900	LEDPanelS-P7 Sq620-29W-BLE2-830-U19	3000K	2.2kg
542016019600	LEDPanelS-P7 Sq620-29W-BLE2-840-U19	4000K	2.2kg
542016017200	LEDPanelS-P7 Sq595-29W-DALI-830-U19	3000K	2.0kg
542098055600	LEDPanelS-P7 Sq595-29W-DALI-840-U19	4000K	2.0kg
542016017300	LEDPanelS-P7 Re295-29W-DALI-830-U19	3000K	2.1kg
542098055500	LEDPanelS-P7 Re295-29W-DALI-840-U19	4000K	2.1kg
542016016100	LEDPanelS-P7 Sq620-29W-DALI-830-U19	3000K	2.2kg
542016017400	LEDPanelS-P7 Sq620-29W-DALI-840-U19	4000K	2.2kg
542098055700	LEDPanelS-P7 Sq595-22/29W-940-U19	4000K	2.0kg
542016020300	LEDPanelS-P7 Re295-22/29W-940-U19	4000K	2.1kg
542016020900	LEDPanelS-P7 Sq620-22/29W-940-U19	4000K	2.2kg
542016016300	LEDPanelS-P7 Sq595-29W-BLE2-940-U19	4000K	2.0kg
542016019500	LEDPanelS-P7 Re295-29W-BLE2-940-U19	4000K	2.1kg
542016016000	LEDPanelS-P7 Sq620-29W-BLE2-940-U19	4000K	2.2kg
542016020600	LEDPanelS-P7 Sq595-29W-DALI-940-U19	4000K	2.0kg
542016018800	LEDPanelS-P7 Re295-29W-DALI-940-U19	4000K	2.1kg
542016019400	LEDPanelS-P7 Sq620-29W-DALI-940-U19	4000K	2.2kg
542016021200	LEDPanelS-P7 Sq620-22/29W-865-U19	6500K	2.2kg
542016018400	LEDPanelS-P7 Sq620-29W-BLE2-865-U19	6500K	2.2kg



Item Code	Luminaire Description	CCT	kg
542016016500	LEDPanelS-P7 Sq620-29W-DALI-865-U19	6500K	2.2kg
542016019200	LEDPanelS-P7 Sq595-22/29W-830/840-U19	3000K/4000K	2.0kg
542016016600	LEDPanelS-P7 Sq620-22/29W-830/840-U19	3000K/4000K	2.2kg
542016019100	LEDPanelS-P7 Sq595-29W-DALI-830/840-U19	3000K/4000K	2.0kg
542016018900	LEDPanelS-P7 Sq620-29W-DALI-830/840-U19	3000K/4000K	2.2kg
542016019300	LEDPanelS-P7 Sq595-29W-BLE2-830/840-U19	3000K/4000K	2.0kg
542016019800	LEDPanelS-P7 Sq620-29W-BLE2-830/840-U19	3000K/4000K	2.2kg
542016016700	LEDPanelS-P7 Sq595-29W-10V-830/840-U19	3000K/4000K	2.0kg
542016018300	LEDPanelS-P7 Sq620-29W-10V-830/840-U19	3000K/4000K	2.2kg
542003021800*	LEDPanelRc-S-B2 Mounting-Springs	/	0.11kg
542098033000*	LEDPanelRc-S-B2 Re298 Mounting-Springs	/	0.13kg
542098045500*	LEDPanelS-P Suspension-Kit-G6	/	0.16kg

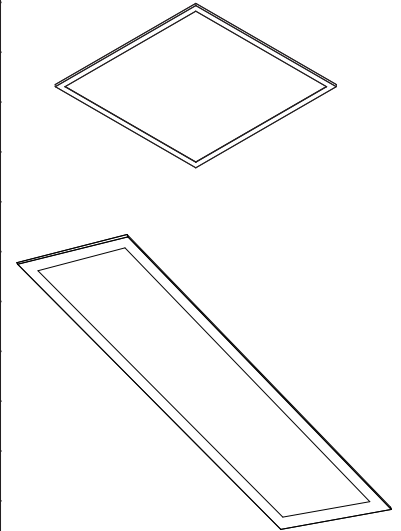

*Accessories should be purchased separately.

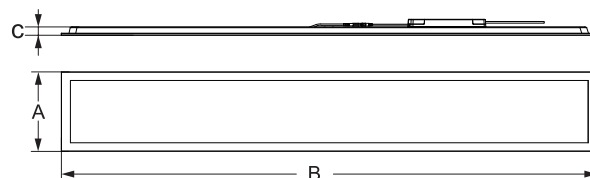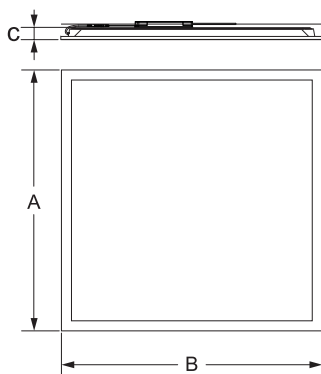

Model Name	A(mm)	B(mm)	C(mm)
Sq595	595	595	32
Sq620	620	620	34
Re295	295	1195	32





Light Source

Product Code	Product Description	N	Light Source Code	QR Code	Energy Label
542016020200	LEDPanelS-P7 Sq595-22/29W-830-U19	7	LS134000412-01		
542016018600	LEDPanelS-P7 Sq620-22/29W-830-U19	7			
542016018700	LEDPanelS-P7 Sq595-29W-BLE2-830-U19	7			
542016019900	LEDPanelS-P7 Sq620-29W-BLE2-830-U19	7			
542016017200	LEDPanelS-P7 Sq595-29W-DALI-830-U19	7			
542016016100	LEDPanelS-P7 Sq620-29W-DALI-830-U19	7			
542016020000	LEDPanelS-P7 Sq595-22/29W-840-U19	7	LS134000415-01		
542016017000	LEDPanelS-P7 Sq620-22/29W-840-U19	7			
542016018500	LEDPanelS-P7 Sq595-29W-BLE2-840-U19	7			
542016019600	LEDPanelS-P7 Sq620-29W-BLE2-840-U19	7			
542098055600	LEDPanelS-P7 Sq595-29W-DALI-840-U19	7			
542016017400	LEDPanelS-P7 Sq620-29W-DALI-840-U19	7			
542016016200	LEDPanelS-P7 Sq595-29W-840-U19-PL	7	LS134000419-01		
542016021200	LEDPanelS-P7 Sq620-22/29W-865-U19	7			
542016018400	LEDPanelS-P7 Sq620-29W-BLE2-865-U19	7			
542016016500	LEDPanelS-P7 Sq620-29W-DALI-865-U19	7			
542098055700	LEDPanelS-P7 Sq595-22/29W-940-U19	7	LS134000425-01		
542016020900	LEDPanelS-P7 Sq620-22/29W-940-U19	7			
542016016300	LEDPanelS-P7 Sq595-29W-BLE2-940-U19	7			
542016016000	LEDPanelS-P7 Sq620-29W-BLE2-940-U19	7			
542016020600	LEDPanelS-P7 Sq595-29W-DALI-940-U19	7			
542016019400	LEDPanelS-P7 Sq620-29W-DALI-940-U19	7			
542016021100	LEDPanelS-P7 Sq595-29W-DALI-TW-U19	7	LS134000431-01		
542016016400	LEDPanelS-P7 Sq620-29W-DALI-TW-U19	7			
542016020700	LEDPanelS-P7 Sq595-29W-BLE2-TW-U19	7			
542016020800	LEDPanelS-P7 Sq620-29W-BLE2-TW-U19	7			
542016019200	LEDPanelS-P7 Sq595-22/29W-830/840-U19	7	LS134000432-01		
542016016600	LEDPanelS-P7 Sq620-22/29W-830/840-U19	7			
542016019100	LEDPanelS-P7 Sq595-29W-DALI-830/840-U19	7			
542016018900	LEDPanelS-P7 Sq620-29W-DALI-830/840-U19	7			
542016019300	LEDPanelS-P7 Sq595-29W-BLE2-830/840-U19	7			
542016019800	LEDPanelS-P7 Sq620-29W-BLE2-830/840-U19	7			
542016016700	LEDPanelS-P7 Sq595-29W-10V-830/840-U19	7	LS134000912-02		
542016018300	LEDPanelS-P7 Sq620-29W-10V-830/840-U19	7			
542016016800	LEDPanelS-P7 Re295-22/29W-830-U19	3			
542098055800	LEDPanelS-P7 Re295-29W-BLE2-830-U19	3	LS134000915-02		
542016017300	LEDPanelS-P7 Re295-29W-DALI-830-U19	3			
542016018100	LEDPanelS-P7 Re295-22/29W-840-U19	3			
542016020100	LEDPanelS-P7 Re295-29W-BLE2-840-U19	3	LS134000915-02		
542098055500	LEDPanelS-P7 Re295-29W-DALI-840-U19	3			

Light Source





Product Code	Product Description	N	Light Source Code	QR Code	Energy Label
542016020300	LEDPanelS-P7 Re295-22/29W-940-U19	3	LS134000925-01		
542016019500	LEDPanelS-P7 Re295-29W-BLE2-940-U19	3			
542016018800	LEDPanelS-P7 Re295-29W-DALI-940-U19	3			
542016017600	LEDPanelS-P7 Re295-29W-DALI-TW-U19	3	LS134000931-02		
542016017500	LEDPanelS-P7 Re295-29W-BLE2-TW-U19	3			

Recessed Installation (Lay-in)

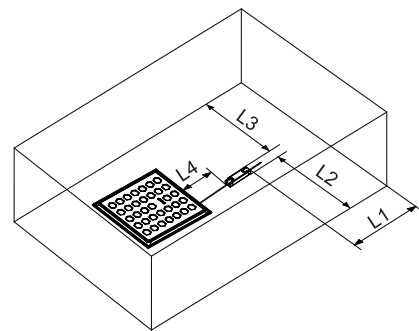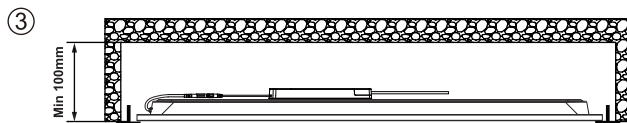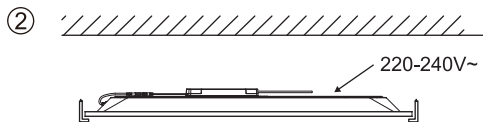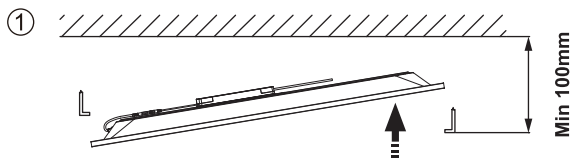

Type	L1(mm)	L2(mm)	L3(mm)	L4(mm)
SQ595				
SQ620	≥500	≥500	≥500	≤450
RE295				


Recessed Installation (Mounting springs)

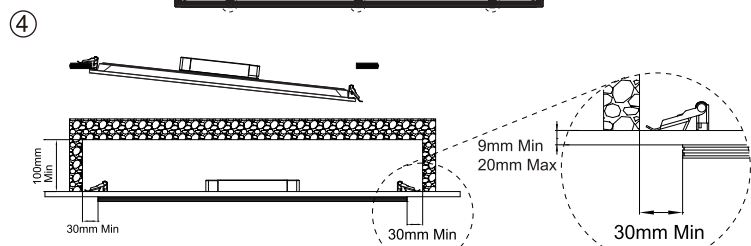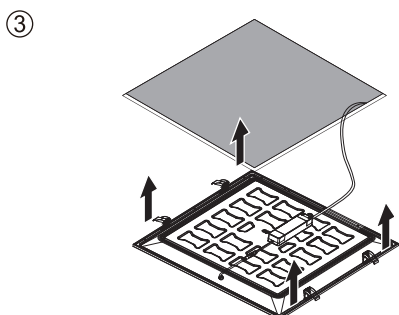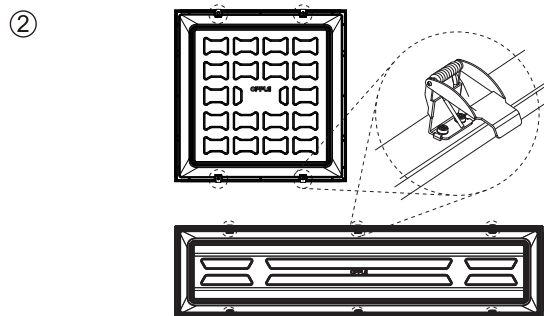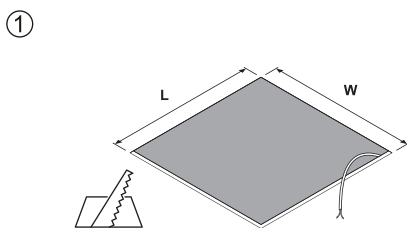


Panel LED 595×595 L 580mm W 580mm  x4  x8

Panel LED 295×1195 L 280mm W 1180mm  x6  x12

Suspension Installation (Suspension Kit)

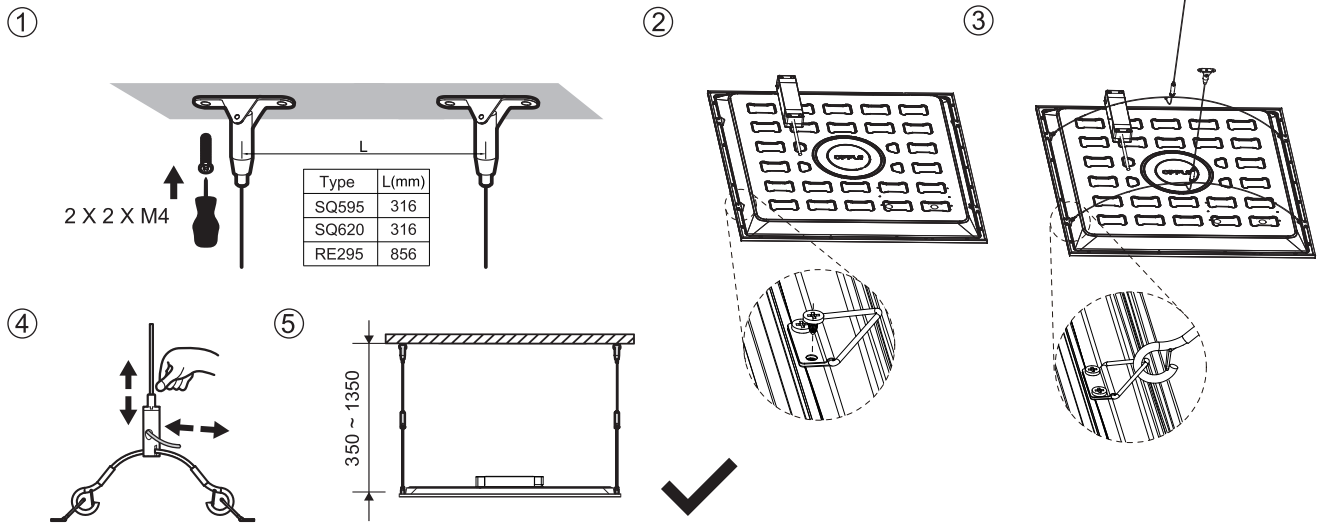


Wiring Connection

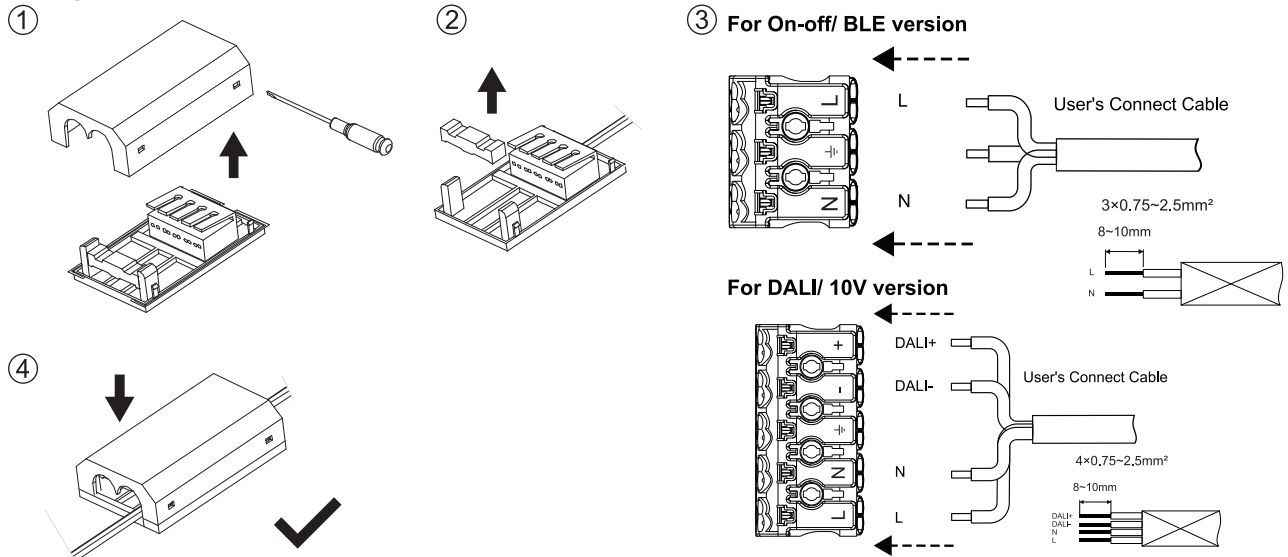


LED drivers

On-off version (Power selection)

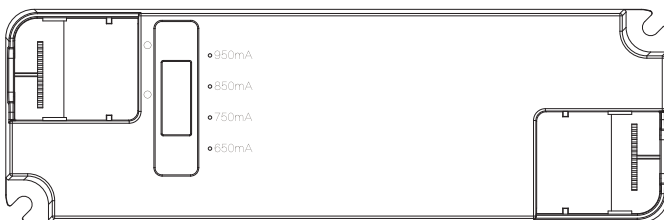

Output Current (mA)	Rated Wattage (W)	Lumen (lm)	UGR
950	34	5780	UGR < 22
850	29	4930	UGR < 19
750	26	4420	UGR < 19
650 (default)	22	3740	UGR < 19

Dali version (Touch Dim Function)

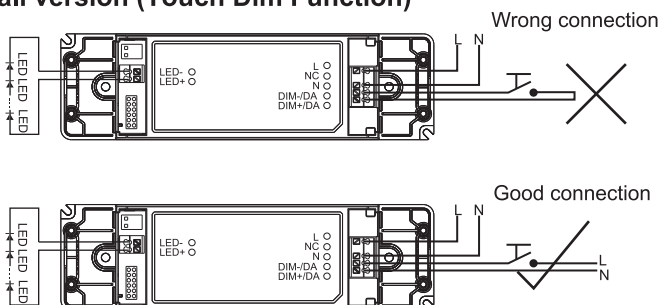


Function	Contact Duration	Reaction
No Action	< 50ms	Nothing
Short Push	50-500ms	Turn on or off
Long Push	> 500ms	Dimming up or down
Synchronisation	10s	Go to SYNC level, 50%
	20s	Go to SYNC level, 100%

Touch Dim Terminal Consumption: Typical 3mA(220V).


Warning: TD function and DALI function can't be used at the same time, to avoid damaging the DALI system by high voltage.

Quick Connection For single/ double CCT version

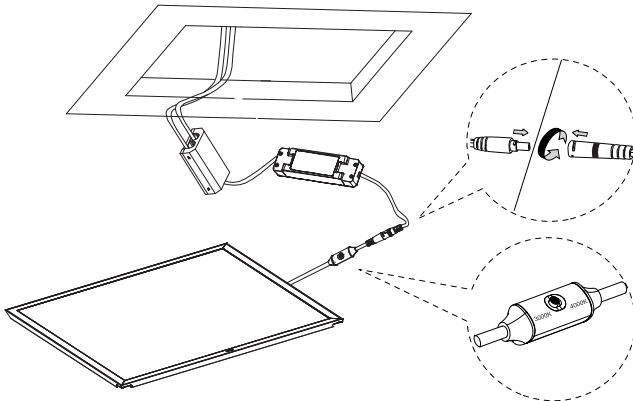

Note: CCT switch is only for double CCT version, the default setting is 4000K.

For tunable white (TW) version

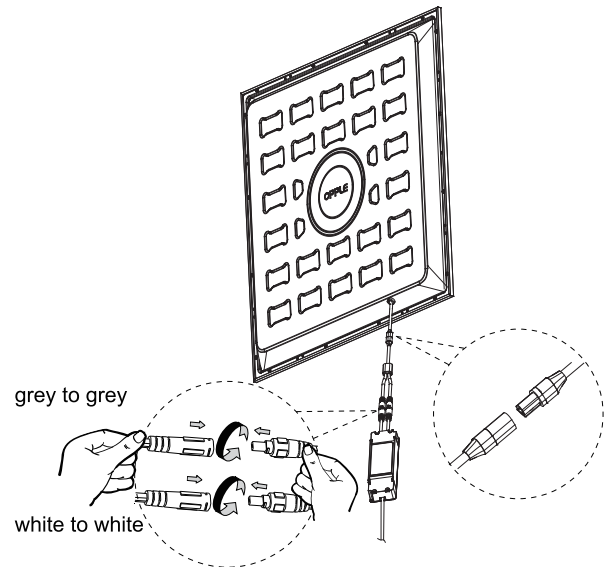

Caution

The luminaire is only suitable for safety extra low voltage supply (<50Va.c.; <120Vd.c.).

The controlgear for the connection panel should be SELV.

It must be basic insulation between FELV and SELV, as is FELV and LV supply for 1-10V and DALI type.

The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.

For Bluetooth products, Bluetooth operating frequency: 2402-2480 MHz, Bluetooth max. transmission power: <10 dBm.




Caution: Any operation on the LED module is strictly forbidden while the power is on.

Defective wiring must only be replaced by the manufacturer, distributor, or a qualified technician.

Achtung: Arbeiten am LED-Modul sind während des Betriebs strikt verboten.

Defekte Leitungen dürfen ausschließlich vom Hersteller, Händler oder einer qualifizierten Fachkraft ausgetauscht werden.



This luminaire is not suitable for covering with thermally insulating materials.



If the wiring is damaged, it must be replaced by the manufacturer, distributor, or a qualified expert to avoid risks.

Diese Leuchte ist nicht für die Abdeckung mit thermisch isolierenden Materialien geeignet.

Im Falle eines Drahtschadens darf dieser nur vom Hersteller, Händler oder einer qualifizierten Fachkraft ersetzt werden, um Risiken zu vermeiden.

For type Y attachments:

If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.

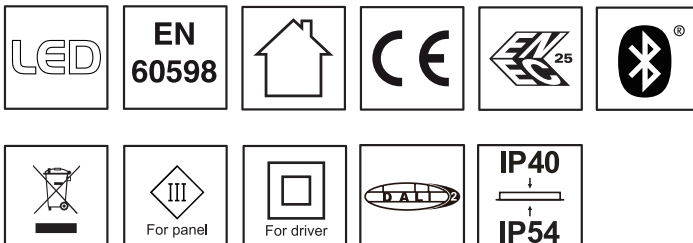

Data subject to change
Les données sont sujettes à modifications
Änderungen vorbehalten

OPPLE Lighting Co., Ltd.
Room 411, Building 1 No. 6111,
Longdong Avenue, Pudong New District,
Shanghai City 201201, P. R. China
www.opple.com

Opplé Lighting B.V.
Meerenakkerweg 1-07
5652 AR Eindhoven
The Netherlands
service@opple.com

250055158000