




Waterproof EcoMax G4

- Waterproof luminaire in "sealed-for-life" concept
- Quick & easy installation due to twist-and-lock endcap
- Standard equipped with Power switch
- Supplied with vandal-proof stainless steel ceiling and suspension clips
- Equipped with 3x2,5mm² throughwiring, DALI version 5x2,5mm²

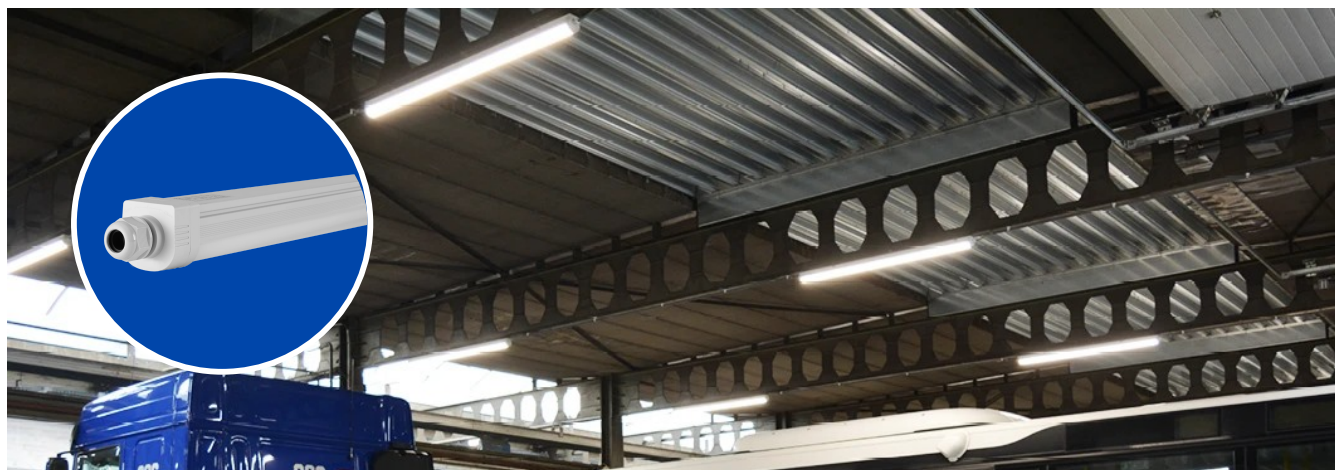

Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen (lm)	Efficacy (lm/W)	CCT (K)	Net Weight (kg/pc)
DALI2							
531000043700	LEDWaterproof-E4 L15-52W-DALI-840	TL 1x80W	52	8320	160	4000	1.13

Packaging information


Item			Box			
Item Code	Item Description	EU HS Code	Dimensions (mm) (LxWxH)	Gross Weight (kg/pc)	EAN	pc/box
531000043700	LEDWaterproof-E4 L15-52W-DALI-840	94051190	66x66x1667	1.38	6937209609786	1
542098001000	LEDTrunking DALI Power Supply	85044083	198x54x39	0.24	6945730496614	1

Technical Specifications	
Lifetime (L70)	100,000 h
Lifetime (L80)	100,000 h
On-/Off-cycles	100,000
Colour consistency (SDCM)	4
Dimmability	DALI2
Beam angle	120 °
Finishing	Grey RAL 7035
RAL-Number	7035
Colour rendering index (CRI)	> 80
Ingress protection (IP)	IP66
Impact strength (IK)	IK08
Protection class	II
Risk group (EN 62471)	RG0
With control gear	True
Glow wire test	850 °C
Driver failure rate (at 5,000 hrs)	≤ 1 %
Power factor	≥ 0.95


Electrical Supply	
Frequency	50 - 60 Hz
Nominal voltage	220 - 240 V
DC input voltage	See catalogue appendix Connection Specifications

Mechanical Properties	
Housing material	Polycarbonate
UV resistant	No
Mounting clips	Stainless steel

Ambient Conditions	
Operating temperature	-30 ~ 45 °C
Application temperature	25 °C
Storage environment	-30 ~ 60 °C

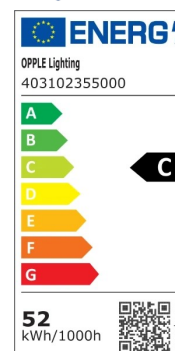


Dimensional Drawing (mm)

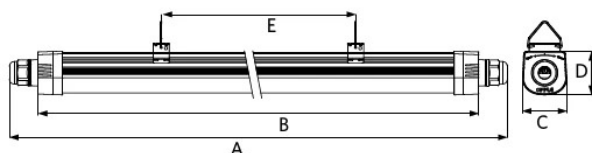

Type	A	B	C	D	E
L06	680	600	63	62	350
L12	1280	1200	63	62	800
L15	1580	1500	63	62	950

Installation Possibilities

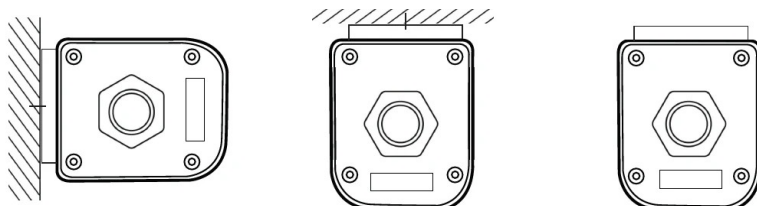

Photometric Data

