



Reflector GU10 EcoMax G2

- Full retrofit of existing halogen GU10 lamps
- With light silver outer finish
- No UV/IR radiation
- Significantly lower heat output than halogen, avoiding discolouration and risk of damaging goods



Specifications

| Item Code | Item Description | Equivalent to (W) | Power (W) | Lumen (lm) | Efficacy (lm/W) | CCT (K) | Net Weight (kg/pc) |
|-------------------------|-----------------------------|-------------------|-----------|------------|-----------------|---------|--------------------|
| Dimmable (Triac) | | | | | | | |
| 800021002200 | LEDGU10-E2 3.5W-DIM-830-36D | Halogen 35W | 3.5 | 350 | 100 | 3000 | 0.033 |

Packaging information

| Item | | | Box | | | |
|--------------|-----------------------------|------------|-------------------------|----------------------|---------------|--------|
| Item Code | Item Description | EU HS Code | Dimensions (mm) (LxWxH) | Gross Weight (kg/pc) | EAN | pc/box |
| 800021002200 | LEDGU10-E2 3.5W-DIM-830-36D | 85395200 | 52x52x62 | 0.06 | 6937209605207 | 1 |
| 800021002200 | LEDGU10-E2 3.5W-DIM-830-36D | 85395200 | 75x113x275 | 1.90 | 6941491798226 | 30 |

Technical Specifications

| | |
|------------------------------|----------|
| Lifetime (L70) | 25,000 h |
| On-/Off-cycles | 50,000 |
| Dimmability | Triac |
| Beam angle | 36 ° |
| Finishing | Silver |
| Colour rendering index (CRI) | > 80 |

Electrical Supply


| | |
|------------------|-------------|
| Frequency | 50 - 60 Hz |
| Nominal voltage | 220 - 240 V |
| DC input voltage | No |

Mechanical Properties


| | |
|------------------|----------------------------------|
| Housing material | Polybutylene terephthalate (PBT) |
|------------------|----------------------------------|

Ambient Conditions

| | |
|-------------------------|-------------|
| Operating temperature | -20 - 40 °C |
| Application temperature | 25 °C |
| Storage environment | -25 - 50 °C |

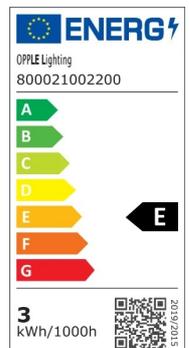

Dimensional Drawing (mm)

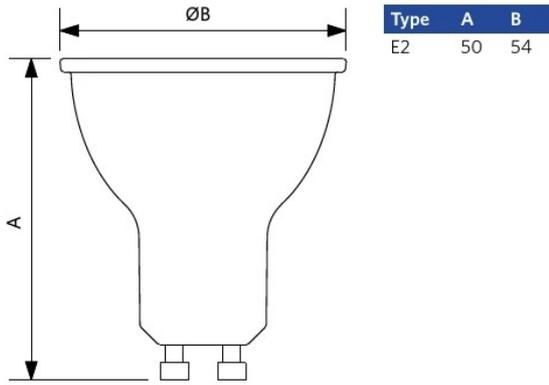

Photometric Data

