

## T8 Tube Performer G2

- Single-ended full IEC compliant LED Tube with patented driver
- Improved efficacy of 170 lm/W
- Retrofit existing T8 lamps with EM ballast installations ONLY!
- No warm-up time, 100% light instantly when switched on
- Full glass body



SAFE AND EASY INSTALLATION: ONLY USE WITH LED DUMMY STARTER.  
Tubes are NOT suitable for serial installation.

## Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen (lm)	Efficacy (lm/W)	CCT (K)	Net Weight (kg/pc)
<b>On-Off</b>							
802003034600	LEDTubeT8-EMB-P2 L1200 16W-865	TL 1x58W	16	2720	170	6500	0.21

## Packaging information

Item			Box			
Item Code	Item Description	EU HS Code	Dimensions (mm) (LxWxH)	Gross Weight (kg/pc)	EAN	pc/box
802003034600	LEDTubeT8-EMB-P2 L1200 16W-865	85395200	1200x28x28	0.35	6937209622495	1
802003034600	LEDTubeT8-EMB-P2 L1200 16W-865	85395200	1285x165x170	6.47	6937209615503	25

### Technical Specifications

Lifetime (L70)	50,000 h
On-/Off-cycles	100,000
Dimmability	On-Off
Beam angle	220 °
Colour rendering index (CRI)	> 80
Fitting	G13

### Electrical Supply


Frequency	50 - 60 Hz
Nominal voltage	220 - 240 V
DC input voltage	No

### Mechanical Properties

#### Ambient Conditions


Operating temperature	-20 - 45 °C
Application temperature	25 °C
Storage environment	-25 ~ 50 °C

## Dimensional Drawing (mm)

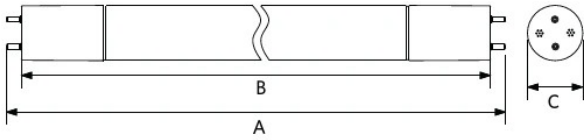

Type	A	B	C
L600	603	589	26
L1200	1213	1199	26
L1500	1514	1500	26

## Installation Possibilities



Single-ended connection

## Photometric Data

