



## LED Strip - IP20

- Compleet assortiment LED Strips
- Breed profielportfolio met verschillende kleuropties



## Specificaties

Artikelcode	Artikelomschrijving	Efficiëntie (lm/W)	CCT (K)	LEDs per meter	Minimale snijlengte	Vermogen per meter (W/m)	Lumen per meter (lm/M)	Nettogewicht (kg/st)
<b>IP20</b>								
806001007100	LEDStrip-E 4.8W-930-600-IP20	110	3000	120	50	4.8	600	0.1

# Accessoires



806098001800  
LEDStrip Profile-SF-10x10-AL



806098002000  
LEDStrip Profile-SF-15x15-AL



806098002200  
LEDStrip Profile-SF-17x7-AL



806098002400  
LEDStrip Profile-RC-10x10-AL



806098002500  
LEDStrip Profile-RC-15x15-AL



806098002600  
LEDStrip Profile-Corner-18x18-AL



806098003000  
LEDStrip Connector-SS-IP20



806098003400  
LEDStrip Wire-Connector-SW-IP20



806098003800  
LEDStrip Wire-Connector-SS-IP20



806098004200  
LEDStrip L-Connector-SS-IP20



820009007900  
LEDDriver 24V-36W



820009008000  
LEDDriver 24V-60W



820009008100  
LEDDriver 24V-120W



820009008200  
LEDDriver 24V-160W



820009008300  
LEDDriver 24V-240W



820002006100  
LEDDriver 24V-40W-DALI/10V/PWM



820002006200  
LEDDriver 24V-75W-DALI/10V/PWM



820002006300  
LEDDriver 24V-150W-DALI/10V/PWM



820002006400  
LEDDriver 24V-240W-DALI/10V/PWM



822010000700  
LEDStrip RGBW/TW/DIM-BLE2-Controller

## Artikel- en verpakkingsinformatie

Item			Doos			
Artikelcode	Artikelomschrijving	EU HS-code	Afmetingen (mm) (LxBxH)	Brutogewicht (kg/st)	EAN	st/doos
806001007100	LEDStrip-E 4.8W-930-600-IP20	94054239	200x180x14	0.16	6941491788456	1
806098001800	LEDStrip Profile-SF-10x10-AL	94059900	2050x33x33	0.20	6931783054383	1
806098001900	LEDStrip Profile-SF-10x10-BL	94059900	2050x33x33	0.20	6931783054390	1
806098002000	LEDStrip Profile-SF-15x15-AL	94059900	2050x33x33	0.20	6931783054406	1
806098002100	LEDStrip Profile-SF-15x15-BL	94059900	2050x33x33	0.20	6931783054413	1
806098002200	LEDStrip Profile-SF-17x7-AL	94059900	2050x33x33	0.20	6931783054420	1
806098002300	LEDStrip Profile-SF-17x7-BL	94059900	2050x33x33	0.20	6931783054437	1
806098002400	LEDStrip Profile-RC-10x10-AL	94059900	2050x33x33	0.20	6931783054444	1
806098002500	LEDStrip Profile-RC-15x15-AL	94059900	2050x33x33	0.20	6931783054451	1
806098002600	LEDStrip Profile-Corner-18x18-AL	94059900	2050x33x33	0.20	6931783054468	1
806098003000	LEDStrip Connector-SS-IP20	85444290	18x12x11	0.04	6931783054246	1
806098003400	LEDStrip Wire-Connector-SW-IP20	85444290	110x12x11	0.04	6931783054277	1
806098003800	LEDStrip Wire-Connector-SS-IP20	85444290	110x12x11	0.04	6931783054307	1
806098004200	LEDStrip L-Connector-SS-IP20	85444290	21x21x21	0.04	6931783054338	1
820009007900	LEDDriver 24V-36W	85369010	200x50x38	0.17	6941491787428	1
820009008000	LEDDriver 24V-60W	85369010	237x50x38	0.23	6941491787435	1
820009008100	LEDDriver 24V-120W	85369010	298x50x38	0.23	6941491787398	1
820009008200	LEDDriver 24V-160W	85369010	298x50x38	0.28	6941491787404	1
820009008300	LEDDriver 24V-240W	85369010	335x51x38	0.28	6941491787411	1
820002006100	LEDDriver 24V-40W-DALI/10V/PWM	85369010	188x45x32	0.21	6941491788197	1
820002006200	LEDDriver 24V-75W-DALI/10V/PWM	85369010	301x46x37	0.44	6941491788203	1
820002006300	LEDDriver 24V-150W-DALI/10V/PWM	85369010	301x46x37	0.44	6941491788210	1
820002006400	LEDDriver 24V-240W-DALI/10V/PWM	85369010	366x46x37	0.63	6941491788227	1
820002006500	LEDDriver 24V-75W-DALI-IP67	85369010	310x82x27	0.84	6941491788234	1
820002006600	LEDDriver 24V-150W-DALI-IP67	85369010	310x82x27	0.83	6941491788241	1
820002006700	LEDDriver 24V-240W-DALI-IP67	85369010	290x85x31	1.08	6941491788258	1
820003003900	LEDDriver 24V-75W-10V/PWM-IP67	85369010	310x82x27	0.81	6941491788265	1
820003004000	LEDDriver 24V-150W-10V/PWM-IP67	85369010	310x82x27	0.85	6941491788272	1
820003004100	LEDDriver 24V-240W-10V/PWM-IP67	85369010	290x85x31	1.08	6941491788289	1
822010000700	LEDStrip RGBW/TW/DIM-BLE2-Controller	94059200	120x57x31	0.09	6937209623362	1

### Technische specificaties

Levensduur (L70)	50.000
Dimbaarheid	DALI2 / 1-10V / PWM
Kleurweergave index (CRI)	> 90
Beschermingsgraad (IP)	IP20
Risicogroep (EN 62471)	RGO
Voorschakelapparaat inbegrepen	Nee

### Elektrische aansluiting

Frequentie	50 - 60
Nominale spanning	220 - 240

### Materiaal eigenschappen

Lengte	5000
--------	------


### Toepassingscondities

Bedrijfstemperatuur	-10 - 45 °C
Gebruikstemperatuur	25 °C
Opslagtemperatuur	-25 - 50 °C



## Maatschets (mm)

Strip IP20	A	B	C	D	E
4,8W	5000	300	8	1,5	50
9,6W	5000	300	8	1,5	50
14,4W	5000	300	8	1,5	42
19,2W	5000	300	8	1,5	42

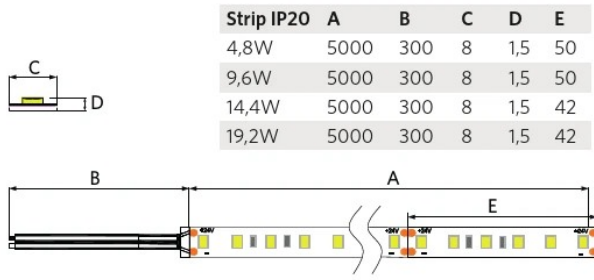

The technical drawing illustrates the dimensions of the LED strip. The top-left view shows a cross-section with dimension C representing the width of the strip and dimension D representing the height of the LED chip. The bottom view shows the strip with dimension B representing the length of the tail, dimension A representing the length of the main strip, and dimension E representing the length of a section of the strip. The strip is shown with a series of LED chips and a tail with a connector.