


SAPP Ceiling Solution

Lighting that fits SAPP ceilings. Perfectly.
A dedicated LED solution designed for seamless
integration into SAPP climate ceilings – combining
performance, flexibility, and architectural precision.

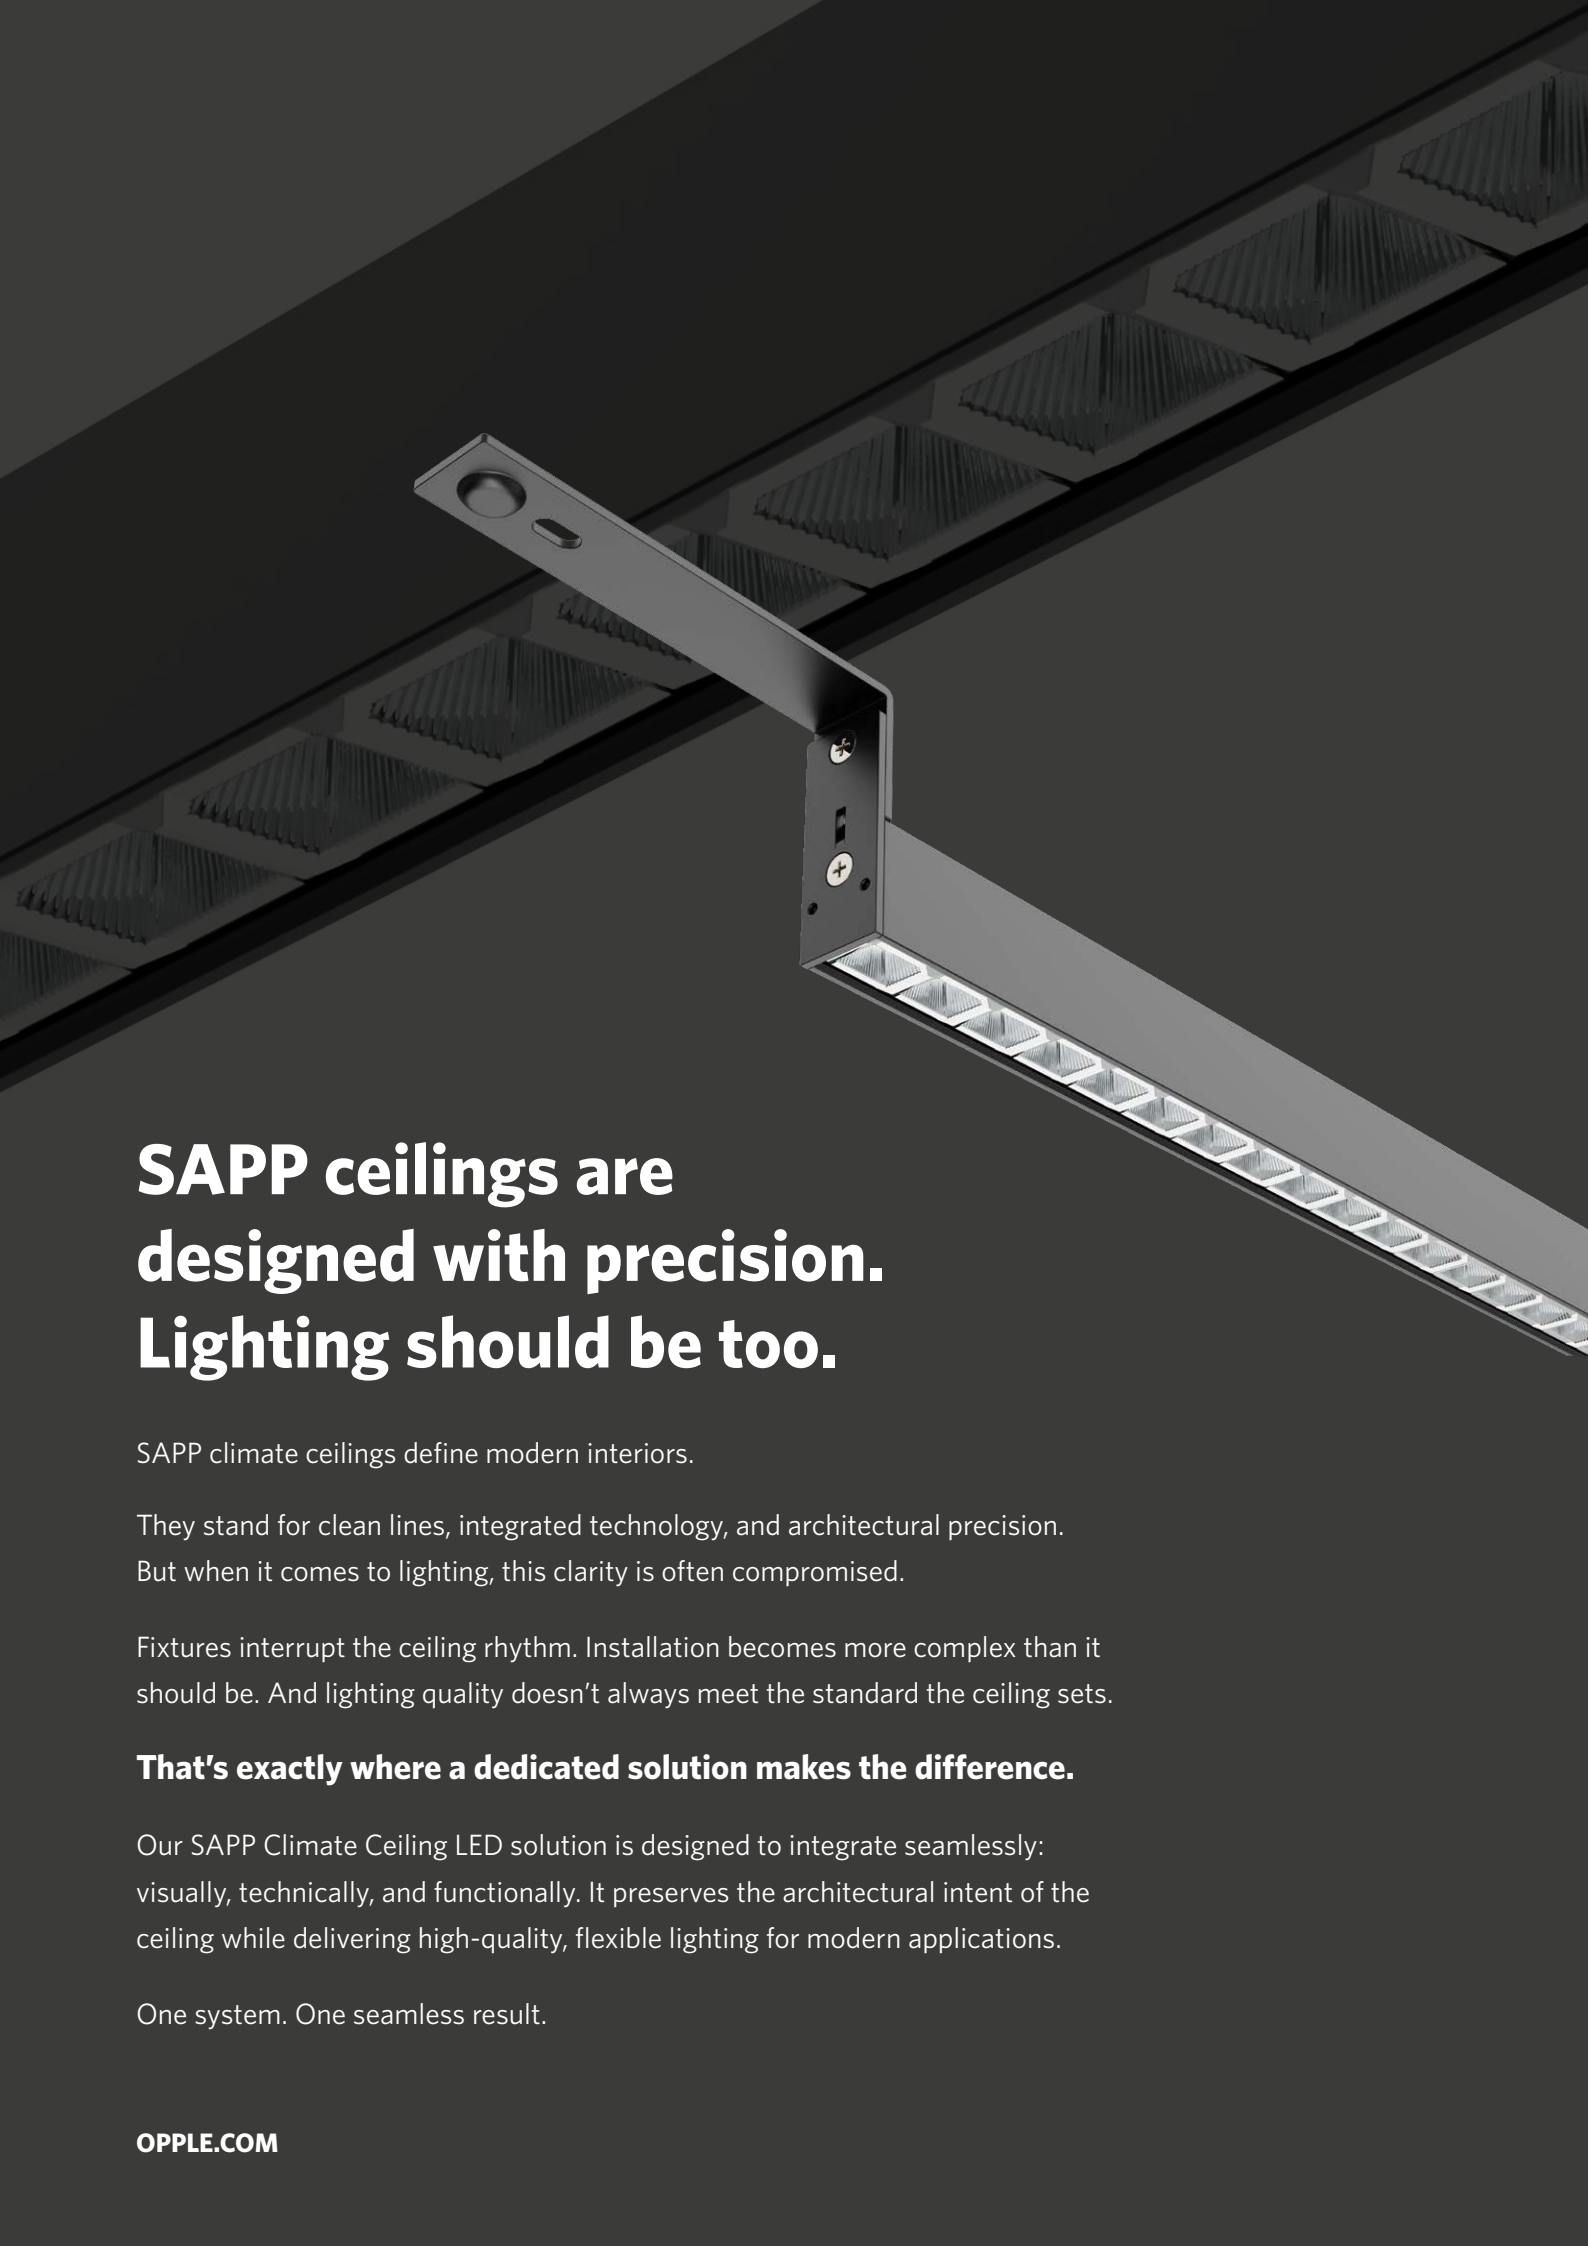

SAPP ceilings are designed with precision. Lighting should be too.

SAPP climate ceilings define modern interiors.

They stand for clean lines, integrated technology, and architectural precision.

But when it comes to lighting, this clarity is often compromised.

Fixtures interrupt the ceiling rhythm. Installation becomes more complex than it should be. And lighting quality doesn't always meet the standard the ceiling sets.

That's exactly where a dedicated solution makes the difference.


Our SAPP Climate Ceiling LED solution is designed to integrate seamlessly: visually, technically, and functionally. It preserves the architectural intent of the ceiling while delivering high-quality, flexible lighting for modern applications.

One system. One seamless result.



Seamless integration

Designed to perfectly align with SAPP ceiling systems – for a clean, continuous architectural appearance.

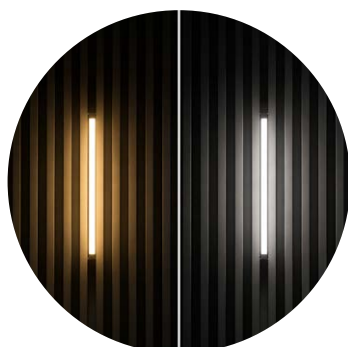


Maximum flexibility

CCT switch (3000K/4000K), adjustable mounting, and wireless BLE control enable easy adaptation to any project.



High performance lighting

Mini reflector optics ensure low glare (UGR < 19), while high efficacy delivers energy-efficient illumination.

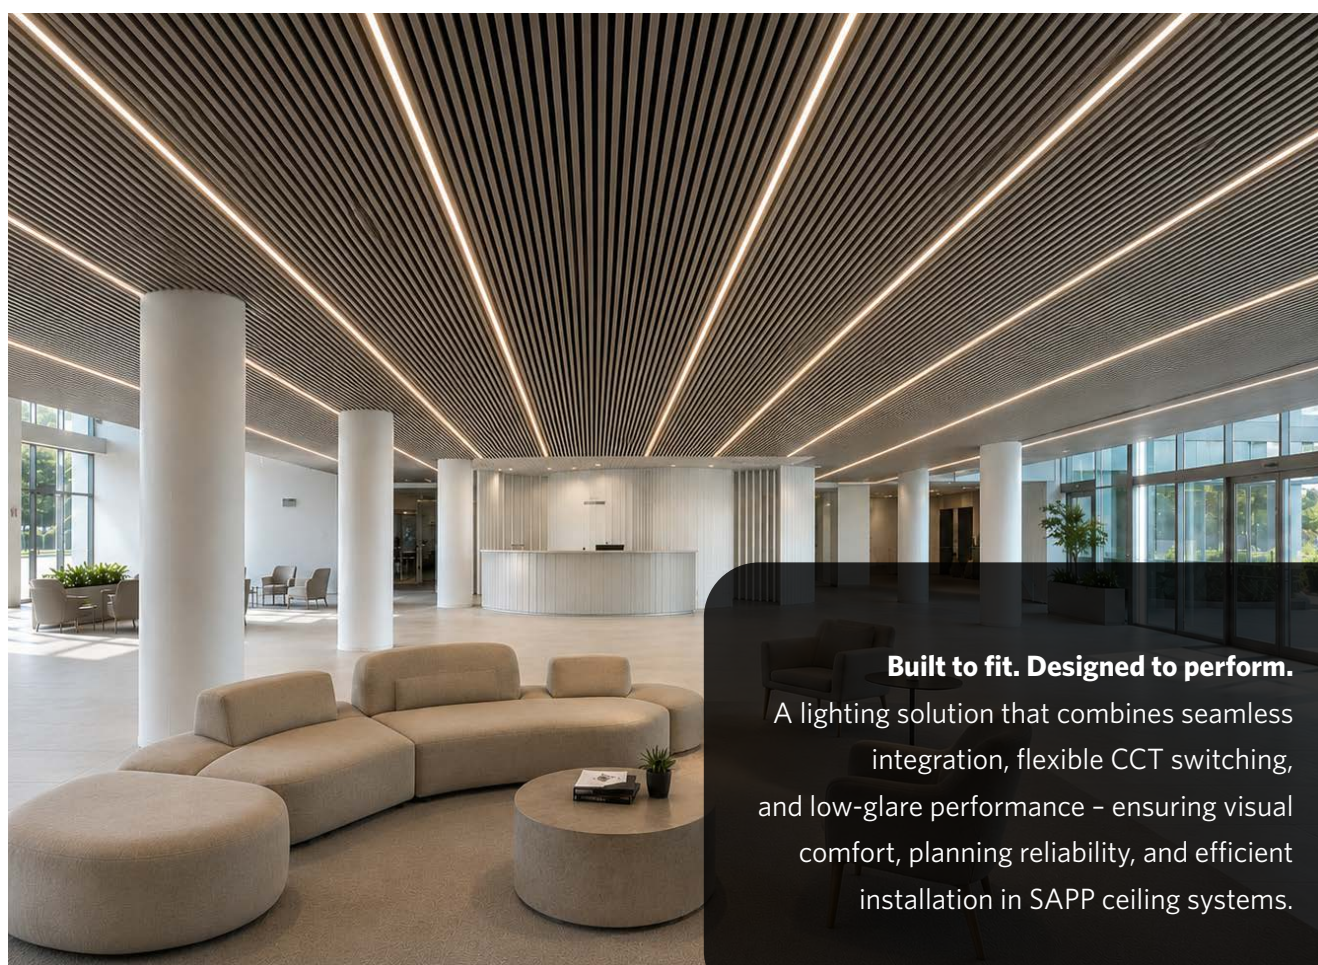

Built to fit. Designed to perform.

A lighting solution that combines seamless integration, flexible CCT switching, and low-glare performance – ensuring visual comfort, planning reliability, and efficient installation in SAPP ceiling systems.



Designed for flexibility. Built for performance.
A future-proof lighting solution combining high efficiency,
visual comfort and flexible control options – perfectly
tailored for SAPP ceiling integration.

SAPP Ceiling Solution:

- CCT switch: 3000K / 4000K
- High efficacy: up to 130 lm/W
- Low glare: UGR < 19
- Dimming: DALI2 / Smart BLE2
- Adjustable mounting system



Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	CCT (K)	Net Weight (kg/pc)
DALI2							
529002238300	LEDSAPP-P L06-24W-DALI-830/840-U19	TL 1x36W	24	2880	120	3K/4K	0.83
529002238100	LEDSAPP-P L12-32W-DALI-830/840-U19	TL 1x58W	32	4150	130	3K/4K	1.12
529002237600	LEDSAPP-P L15-35W-DALI-830/840-U19	TL 1x58W	35	4550	130	3K/4K	1.2
Smart							
529002238000	LEDSAPP-P L06-24W-BLE2-830/840-U19	TL 1x36W	24	2880	120	3K/4K	0.83
529002237500	LEDSAPP-P L12-32W-BLE2-830/840-U19	TL 1x58W	32	4160	130	3K/4K	1.12
529002237900	LEDSAPP-P L15-35W-BLE2-830/840-U19	TL 1x58W	35	4550	130	3K/4K	1.2



OPPLE LIGHTING

Meerenakkerweg 1-07
 5652 AR Eindhoven,
 The Netherlands

T +31 (0) 88 056 7888
 E service@opple.com

CONTACT

Contact us with your idea and we help you to plan your lighting concept and fitting product solutions for your plan and budget.

Or plan your project directly with our online tools and configurators on: **www.opple.eu/en/support/tools**

