



Highbay Performer G6

- NEW: Low-glare UGR < 19 options available
- High quality LED Highbay solution with improved ultra slim design
- Improved Efficacy up to 200 lm/W
- Available as Smart Lighting solution (BLE2), or DALI2 dimmable
- Three different beam angles: wide (W), narrow (N) and asymmetric (AS)
- Extra high power versions available, up to 40,000 lm
- Equipped with breather to prevent condensation
- Equipped with IP68 connector
- Perfect for gymnasiums and sports facilities



Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen (lm)	Efficacy (lm/W)	CCT (K)	Beam angle	Net Weight (kg/pc)
UGR < 19								
545006013800	LEDHighbay-P6 100W-840-W-U19	HID 400W	100	18000	180	4000	70°	3.28
545006013600	LEDHighbay-P6 100W-DALI-840-W-U19	HID 400W	100	18000	180	4000	70°	3.28
545006013700	LEDHighbay-P6 100W-BLE2-840-W-U19	HID 400W	100	18000	180	4000	70°	3.28
UGR < 19 combined with Reflector accessory								
545006014100	LEDHighbay-P6 185W-840-W	HID 600W	185	33300	180	4000	70°	3.28
545006013900	LEDHighbay-P6 185W-DALI-840-W	HID 600W	185	33300	180	4000	70°	3.28
545006014000	LEDHighbay-P6 185W-BLE2-840-W	HID 600W	185	33300	180	4000	70°	3.28
On-Off								
545001120200	LEDHighbay-P6 70W-840-N	HID 250W	70	13300	190	4000	60°	2.56
545001120300	LEDHighbay-P6 70W-840-W	HID 250W	70	14000	200	4000	100°	2.56
545001120400	LEDHighbay-P6 70W-840-AS	HID 250W	70	13300	190	4000	60° x 100°	2.56
545001120500	LEDHighbay-P6 70W-857-N	HID 250W	70	13300	190	5700	60°	2.56
545001120600	LEDHighbay-P6 70W-857-W	HID 250W	70	14000	200	5700	100°	2.56
545001120700	LEDHighbay-P6 70W-857-AS	HID 250W	70	13300	190	5700	60° x 100°	2.56
545001120800	LEDHighbay-P6 95W-840-N	HID 400W	95	18050	190	4000	60°	2.56
545001120900	LEDHighbay-P6 95W-840-W	HID 400W	95	19000	200	4000	100°	2.56
545001121000	LEDHighbay-P6 95W-840-AS	HID 400W	95	18050	190	4000	60° x 100°	2.56
545001121100	LEDHighbay-P6 95W-857-N	HID 400W	95	18050	190	5700	60°	2.56
545001121200	LEDHighbay-P6 95W-857-W	HID 400W	95	19000	200	5700	100°	2.56
545001121300	LEDHighbay-P6 95W-857-AS	HID 400W	95	18050	190	5700	60° x 100°	2.56
545001121400	LEDHighbay-P6 130W-840-N	HID 400W	130	24700	190	4000	60°	3.28
545001121500	LEDHighbay-P6 130W-840-W	HID 400W	130	26000	200	4000	100°	3.28
545001121600	LEDHighbay-P6 130W-840-AS	HID 400W	130	24700	190	4000	60° x 100°	3.28
545001121700	LEDHighbay-P6 130W-857-N	HID 400W	130	24700	190	5700	60°	3.28
545001121800	LEDHighbay-P6 130W-857-W	HID 400W	130	26000	200	5700	100°	3.28

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen (lm)	Efficacy (lm/W)	CCT (K)	Beam angle	Net Weight (kg/pc)
545001121900	LEDHighbay-P6 130W-857-AS	HID 400W	130	24700	190	5700	60° x 100°	3.28
545001122000	LEDHighbay-P6 170W-840-W	HID 600W	170	34000	200	4000	100°	3.28
545001122100	LEDHighbay-P6 170W-840-N	HID 600W	170	32300	190	4000	60°	3.28
545001122200	LEDHighbay-P6 170W-840-AS	HID 600W	170	32300	190	4000	60° x 100°	3.28
545001122300	LEDHighbay-P6 170W-857-W	HID 600W	170	34000	200	5700	100°	3.28
545001122400	LEDHighbay-P6 170W-857-N	HID 600W	170	32300	190	5700	60°	3.28
545001122500	LEDHighbay-P6 170W-857-AS	HID 600W	170	32300	190	5700	60° x 100°	3.28
545001122600	LEDHighbay-P6 200W-840-W	HID 600W	200	40000	200	4000	100°	3.28
545001122700	LEDHighbay-P6 200W-840-N	HID 600W	200	38000	190	4000	60°	3.28
545001122800	LEDHighbay-P6 200W-840-AS	HID 600W	200	38000	190	4000	60° x 100°	3.28
545001122900	LEDHighbay-P6 200W-857-W	HID 600W	200	40000	200	5700	100°	3.28
545001123000	LEDHighbay-P6 200W-857-N	HID 600W	200	38000	190	5700	60°	3.28
545001123100	LEDHighbay-P6 200W-857-AS	HID 600W	200	38000	190	5700	60° x 100°	3.28
DALI2								
545001114200	LEDHighbay-P6 70W-DALI-840-N	HID 250W	70	13300	190	4000	60°	2.56
545001114300	LEDHighbay-P6 70W-DALI-840-W	HID 250W	70	14000	200	4000	100°	2.56
545001114400	LEDHighbay-P6 70W-DALI-840-AS	HID 250W	70	13300	190	4000	60° x 100°	2.56
545001114500	LEDHighbay-P6 70W-DALI-857-N	HID 250W	70	13300	190	5700	60°	2.56
545001114600	LEDHighbay-P6 70W-DALI-857-W	HID 250W	70	14000	200	5700	100°	2.56
545001114700	LEDHighbay-P6 70W-DALI-857-AS	HID 250W	70	13300	190	5700	60° x 100°	2.56
545001114800	LEDHighbay-P6 95W-DALI-840-N	HID 400W	95	18050	190	4000	60°	2.56
545001114900	LEDHighbay-P6 95W-DALI-840-W	HID 400W	95	19000	200	4000	100°	2.56
545001115000	LEDHighbay-P6 95W-DALI-840-AS	HID 400W	95	18050	190	4000	60° x 100°	2.56
545001115100	LEDHighbay-P6 95W-DALI-857-N	HID 400W	95	18050	190	5700	60°	2.56
545001115200	LEDHighbay-P6 95W-DALI-857-W	HID 400W	95	19000	200	5700	100°	2.56
545001115300	LEDHighbay-P6 95W-DALI-857-AS	HID 400W	95	18050	190	5700	60° x 100°	2.56
545001115400	LEDHighbay-P6 130W-DALI-840-N	HID 400W	130	24700	190	4000	60°	3.28
545001115500	LEDHighbay-P6 130W-DALI-840-W	HID 400W	130	26000	200	4000	100°	3.28
545001115600	LEDHighbay-P6 130W-DALI-840-AS	HID 400W	130	24700	190	4000	60° x 100°	3.28
545001115700	LEDHighbay-P6 130W-DALI-857-N	HID 400W	130	24700	190	5700	60°	3.28
545001115800	LEDHighbay-P6 130W-DALI-857-W	HID 400W	130	26000	200	5700	100°	3.28
545001115900	LEDHighbay-P6 130W-DALI-857-AS	HID 400W	130	24700	190	5700	60° x 100°	3.28
545001116000	LEDHighbay-P6 170W-DALI-840-N	HID 600W	170	32300	190	4000	60°	3.28
545001116100	LEDHighbay-P6 170W-DALI-840-W	HID 600W	170	34000	200	4000	100°	3.28
545001116200	LEDHighbay-P6 170W-DALI-840-AS	HID 600W	170	32300	190	4000	60° x 100°	3.28
545001116300	LEDHighbay-P6 170W-DALI-857-N	HID 600W	170	32300	190	5700	60°	3.28
545001116400	LEDHighbay-P6 170W-DALI-857-W	HID 600W	170	34000	200	5700	100°	3.28
545001116500	LEDHighbay-P6 170W-DALI-857-AS	HID 600W	170	32300	190	5700	60° x 100°	3.28
545001119600	LEDHighbay-P6 200W-DALI-840-N	HID 600W	200	38000	190	4000	60°	3.28
545001119700	LEDHighbay-P6 200W-DALI-840-W	HID 600W	200	40000	200	4000	100°	3.28
545001119800	LEDHighbay-P6 200W-DALI-840-AS	HID 600W	200	38000	190	4000	60° x 100°	3.28
545001119900	LEDHighbay-P6 200W-DALI-857-N	HID 600W	200	38000	190	5700	60°	3.28
545001120000	LEDHighbay-P6 200W-DALI-857-W	HID 600W	200	40000	200	5700	100°	3.28
545001120100	LEDHighbay-P6 200W-DALI-857-AS	HID 600W	200	38000	190	5700	60° x 100°	3.28
Smart								
545001116600	LEDHighbay-P6 70W-BLE2-840-N	HID 250W	70	13300	190	4000	60°	2.56
545001116700	LEDHighbay-P6 70W-BLE2-840-W	HID 250W	70	14000	200	4000	100°	2.56
545001116800	LEDHighbay-P6 70W-BLE2-840-AS	HID 250W	70	13300	190	4000	60° x 100°	2.56
545001116900	LEDHighbay-P6 70W-BLE2-857-N	HID 250W	70	13300	190	5700	60°	2.56
545001117000	LEDHighbay-P6 70W-BLE2-857-W	HID 250W	70	14000	200	5700	100°	2.56
545001117100	LEDHighbay-P6 70W-BLE2-857-AS	HID 250W	70	13300	190	5700	60° x 100°	2.56
545001117200	LEDHighbay-P6 95W-BLE2-840-N	HID 400W	95	18050	190	4000	60°	2.56
545001117300	LEDHighbay-P6 95W-BLE2-840-W	HID 400W	95	19000	200	4000	100°	2.56
545001117400	LEDHighbay-P6 95W-BLE2-840-AS	HID 400W	95	18050	190	4000	60° x 100°	2.56

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen (lm)	Efficacy (lm/W)	CCT (K)	Beam angle	Net Weight (kg/pc)
545001117500	LEDHighbay-P6 95W-BLE2-857-N	HID 400W	95	18050	190	5700	60°	2.56
545001117600	LEDHighbay-P6 95W-BLE2-857-W	HID 400W	95	19000	200	5700	100°	2.56
545001117700	LEDHighbay-P6 95W-BLE2-857-AS	HID 400W	95	18050	190	5700	60° x 100°	2.56
545001117800	LEDHighbay-P6 130W-BLE2-840-N	HID 400W	130	24700	190	4000	60°	3.28
545001117900	LEDHighbay-P6 130W-BLE2-840-W	HID 400W	130	26000	200	4000	100°	3.28
545001118000	LEDHighbay-P6 130W-BLE2-840-AS	HID 400W	130	24700	190	4000	60° x 100°	3.28
545001118100	LEDHighbay-P6 130W-BLE2-857-N	HID 400W	130	24700	190	5700	60°	3.28
545001118200	LEDHighbay-P6 130W-BLE2-857-W	HID 400W	130	26000	200	5700	100°	3.28
545001118300	LEDHighbay-P6 130W-BLE2-857-AS	HID 400W	130	24700	190	5700	60° x 100°	3.28
545001118400	LEDHighbay-P6 170W-BLE2-840-N	HID 600W	170	32300	190	4000	60°	3.28
545001118500	LEDHighbay-P6 170W-BLE2-840-W	HID 600W	170	34000	200	4000	100°	3.28
545001118600	LEDHighbay-P6 170W-BLE2-840-AS	HID 600W	170	32300	190	4000	60° x 100°	3.28
545001118700	LEDHighbay-P6 170W-BLE2-857-N	HID 600W	170	32300	190	5700	60°	3.28
545001118800	LEDHighbay-P6 170W-BLE2-857-W	HID 600W	170	34000	200	5700	100°	3.28
545001118900	LEDHighbay-P6 170W-BLE2-857-AS	HID 600W	170	32300	190	5700	60° x 100°	3.28
545001119000	LEDHighbay-P6 200W-BLE2-840-N	HID 600W	200	38000	190	4000	60°	3.28
545001119100	LEDHighbay-P6 200W-BLE2-840-W	HID 600W	200	40000	200	4000	100°	3.28
545001119200	LEDHighbay-P6 200W-BLE2-840-AS	HID 600W	200	38000	190	4000	60° x 100°	3.28
545001119300	LEDHighbay-P6 200W-BLE2-857-N	HID 600W	200	38000	190	5700	60°	3.28
545001119400	LEDHighbay-P6 200W-BLE2-857-W	HID 600W	200	40000	200	5700	100°	3.28
545001119500	LEDHighbay-P6 200W-BLE2-857-AS	HID 600W	200	38000	190	5700	60° x 100°	3.28

Accessories



543098022000
LEDFixture-IP68-Connector-Kit-5



545001123200
LEDHighbay-P6 Reflector D336



545098011600
LEDHighbay-P6 Pole



545098011700
LEDHighbay-P6 Bracket

543098021900
LEDFixture-IP68-Connector-Kit-3

545001123300
LEDHighbay-P6 Reflector D390

Technical Specifications	
Lifetime (L70)	100,000 h
Lifetime (L80)	70,000 h
Lifetime (L90)	50,000 h
On-/Off-cycles	100,000
Colour consistency (SDCM)	5
Dimmability	On-Off / DALI2 / BLE2
Finishing	Grey Pantone 417U
Colour rendering index (CRI)	> 80
Ingress Protection (IP)	IP66
Impact strength (IK)	IK08
Protection class	I
Risk group (EN 62471)	RG1
With control gear	Yes
Glow wire test	850°C
Driver failure rate (at 5,000 hrs)	< 1%
Power factor	> 0.95
Surge protection (kV)	4kV



Electrical Supply	
Frequency	50 - 60 Hz
Nominal voltage	220 - 240 V
DC input voltage	See catalogue appendix Connection Specifications
230V Cable length	1 m

Mechanical Properties	
Housing material	Aluminium
Optical material	Polycarbonate
Cover material	Polycarbonate

Ambient Conditions	
Operating temperature	-30 - 50°C
Application temperature	25°C
Storage environment	-30 - 60°C



Dimensional Drawing (mm)

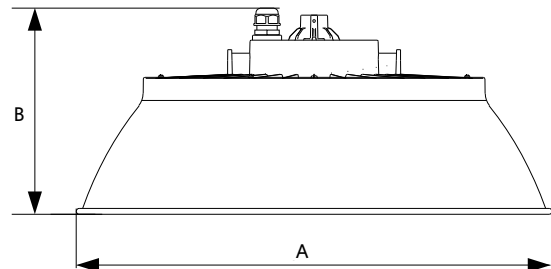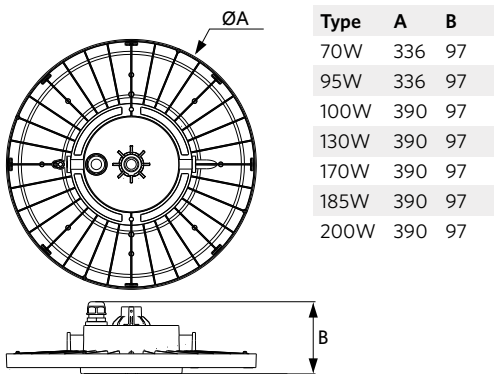

Type	A	B
Reflector Rd336	474	205
Reflector Rd390	550	228

Product Highlights

