



## Linear Clio EcoMax

- Linear Clio EcoMax has a compact design, perfect for upgrading old tube fixtures in existing metal housings
- Luminaire with integrated CCT-switch for color selection (3000K/4000K)
- Driver with integrated Power Switch
- Save energy with high efficiency up to 170 lm/W
- Choose from three standard lengths: 0.6m, 1.2m, and 1.5m
- Easy to install with both magnetic and screw mounting options included
- DC compatibility makes it suitable for use with central emergency lighting systems



## Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	CCT (K)	Net Weight (kg/pc)
<b>On-Off/CCT-Switch</b>						
805012006800	LEDClío-Lin-E L06-7/14W-830/840	TL 1x35W	7 - 14	1120 - 2240	3K/4K	0.13
805012006900	LEDClío-Lin-E L12-16/25W-830/840	TL 1x58W	16 - 25	2720 - 4250	3K/4K	0.22
805012007000	LEDClío-Lin-E L15-22/30W-830/840	TL 1x80W	22 - 30	3850 - 5250	3K/4K	0.26


Technical Specifications	
Lifetime (L70)	70,000 h
Lifetime (L80)	50,000 h
On-/Off-cycles	25,000
Dimmability	On-Off
Beam angle	145°
Colour rendering index (CRI)	> 80
Ingress Protection (IP)	IP20
Protection class	II
With control gear	Yes

Electrical Supply	
Frequency	50 - 60 Hz
Nominal voltage	220 - 240 V
DC input voltage	See catalogue appendix Connection Specifications

Ambient Conditions	
Operating temperature	-25 - 45°C
Application temperature	25°C
Storage environment	-20 - 60°C



## Dimensional Drawing (mm)

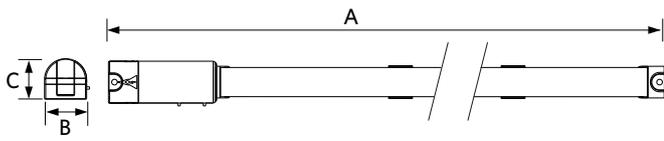

Type	A	B	C
L06	585	35	34
L12	1185	35	34
L15	1485	35	34

## Product Highlights

