OPPLE LIGHTING.

Panel Suspended Riga

- Stylish direct/indirect suspended LED panel
- Clean minimalistic design
- Low Glare UGR19, suitable for office spaces
- Flexible due to 3000/3500/4000K CCT and Power Switch
- DALI2 and Smart Lighting (BLE2) versions available
- DALI2 driver compatible with 230V push dimming

Specifications

Item Code	Item Description	Power (W)	Lumen	Efficacy (lm/W)	CCT (K)	Net Weight (kg/pc)
DALI2						
542004095200	LEDRiga-P Re295-34/40W-DALI-830/840	34	4420 - 5200	130	3K/3.5K/4K	3.6
Smart						
542004095300	LEDRiga-P Re295-34/40W-BLE2-830/840	34	4420 - 5200	130	3K/3.5K/4K	3.5

All codes include the required suspension kit. Suspension length 1.75m.

Available on request with Wieland GST18 or WAGO WINSTA connector, or Euro/Schuko plug.

Technical Specifications	
Lifetime (L70)	70,000 h
Lifetime (L80)	50,000 h
On-/Off-cycles	100,000
Colour consistency (SDCM)	4
Dimmability	DALI2 / BLE2
Beam angle	115° up (30%) / 90° down (70%)
Finishing	White RAL9003
RAL-Number	☐ 9003
Colour rendering index (CRI)	> 80
UGR	19
Ingress Protection (IP)	IP20
Impact strength (IK)	IK02
Protection class	II
Risk group (EN 62471)	RG0
With control gear	Yes
Glow wire test	650°C
Driver failure rate (at 5,000 hrs)	< 1%
Power factor	> 0.9

Electrical Supply	
Frequency	50 - 60 Hz
Nominal voltage	220 - 240 V
DC input voltage	See catalogue appendix Connection Specifications

Mechanical Properties	
Housing material	Aluminium
Optical material	PMMA
Cover material	PMMA

Ambient Conditions	
Operating temperature	-10 ~ 35°C
Application temperature	25°C
Storage environment	-25 ~ 50°C

Dimensional Drawing (mm)

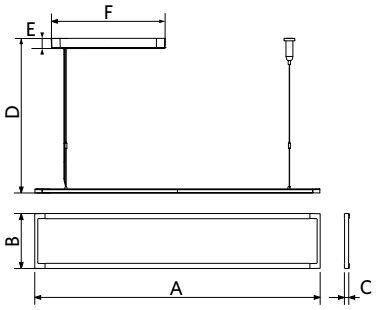

	A	B	C	D	E	F
Sq295	1200	300	16,5	1500	39	385
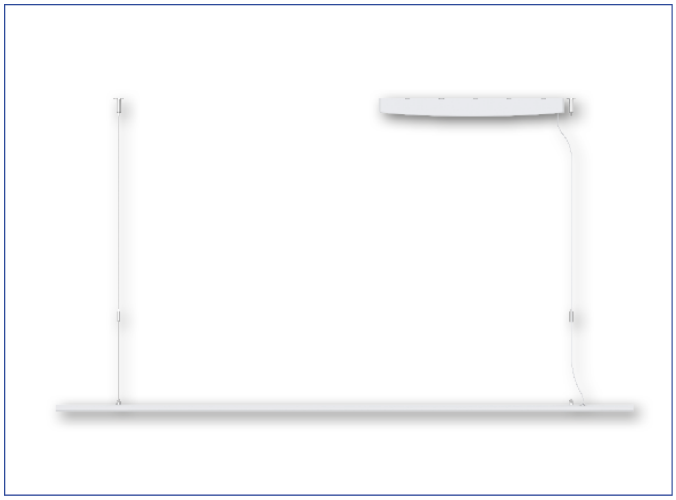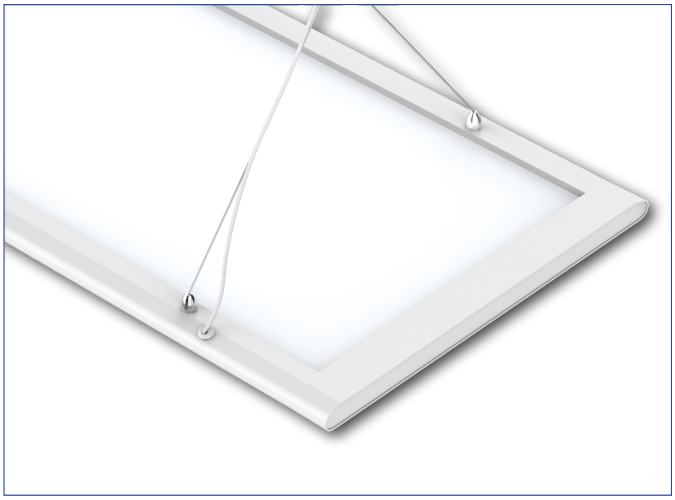
Product Highlights