



LED Strip - IP67 - Tunable White

- Complete LED Strip portfolio
- Multiple driver options available
- Wide profile portfolio with different color options
- Mounting and silicone kit available as accessory



Specifications

Item Code	Item Description	Lumen (lm/m)	LEDs per meter	Power (W/m)	Minimum cutting length	Efficacy (lm/W)	CCT (K)	Net Weight (kg/pc)
Smart/IP67								
806001008600	LEDStrip-P 12W-1000-TW-IP67	1440	140	12	100	120	2700 - 6500	0.25

Accessories



806098002000
LEDStrip Profile-SF-15x15-AL



806098002200
LEDStrip Profile-SF-17x7-AL



806098002500
LEDStrip Profile-RC-15x15-AL



806098002600
LEDStrip Profile-Corner-18x18-AL




806098004600
LEDStrip Silicone-Kit-IP67



806098004700
LEDStrip Mounting-Kit-10-IP67



820004013700
LEDDriver 24V-200W-BLE2-TW



826001000300
LEDDriver 24V-80W-BLE2-TW

It is recommended to use a power supply between 120% and 150% of the total power needed for the LED Strip
 Extra measures are required for Tunable White drivers to obtain an IP rating for outdoor applications
 All profiles have a length of 2m and come with a polycarbonate cover as well as 4 end caps - 2 end caps suitable for wirethrough, and 2 standard end caps

Technical Specifications	
Lifetime (L70)	50,000 h
Dimmability	BLE2
Colour rendering index (CRI)	> 90
Ingress Protection (IP)	IP67
Risk group (EN 62471)	RG0
With control gear	No


Electrical Supply	
Frequency	50 - 60 Hz
Nominal voltage	220 - 240 V

Mechanical Properties	
Length (mm)	5000

Ambient Conditions	
Operating temperature	-10 ~ 45°C
Application temperature	25°C
Storage environment	-25 ~ 50°C



Dimensional Drawing (mm)

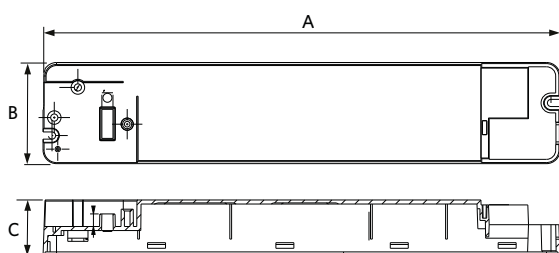

Driver IP20	A	B	C
80W	230	45	25
200W	311	48	26

