



Universal Trunking


- Universal trunking module for refurbishing existing systems
- Compatible with the most commonly installed trunking systems
- Tool-free, hassle-free installation
- Multiple power options and beam angles for versatile applications
- Integrated power switch for added convenience
- DALI2 dimmable versions for enhanced control



Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen (lm)	Beam angle	Net Weight (kg/pc)
On-Off						
531000033700	LEDTrunk-Uni-P L15-28W/46W-840-BW	TL 2x70W	28 - 46	5040/8280	75° x 90°	1.362
531000033900	LEDTrunk-Uni-P L15-28W/46W-840-DF	TL 2x70W	28 - 46	5040/8280	120°	1.362
531000033500	LEDTrunk-Uni-P L15-28W/46W-840-M	TL 2x70W	28 - 46	5040/8280	90°	1.362
531000033300	LEDTrunk-Uni-P L15-28W/46W-840-N	TL 2x70W	28 - 46	5040/8280	60°	1.362
531000033100	LEDTrunk-Uni-P L15-28W/46W-840-W	TL 2x70W	28 - 46	5040/8280	120°	1.362
531000033800	LEDTrunk-Uni-P L15-68W/85W-840-BW	TL 2x100W	68 - 85	12240/15300	75° x 90°	1.362
531000034000	LEDTrunk-Uni-P L15-68W/85W-840-DF	TL 2x100W	68 - 85	12240/15300	120°	1.362
531000033600	LEDTrunk-Uni-P L15-68W/85W-840-M	TL 2x100W	68 - 85	12240/15300	90°	1.362
531000033400	LEDTrunk-Uni-P L15-68W/85W-840-N	TL 2x100W	68 - 85	12240/15300	60°	1.362
531000033200	LEDTrunk-Uni-P L15-68W/85W-840-W	TL 2x100W	68 - 85	12240/15300	120°	1.362
DALI2						
531000034700	LEDTrunk-Uni-P L15-28W/46W-DALI-840-BW	TL 2x70W	28 - 46	5040/8280	75° x 90°	1.442
531000034900	LEDTrunk-Uni-P L15-28W/46W-DALI-840-DF	TL 2x70W	28 - 46	5040/8280	120°	1.442
531000034500	LEDTrunk-Uni-P L15-28W/46W-DALI-840-M	TL 2x70W	28 - 46	5040/8280	90°	1.442
531000034300	LEDTrunk-Uni-P L15-28W/46W-DALI-840-N	TL 2x70W	28 - 46	5040/8280	60°	1.442
531000034100	LEDTrunk-Uni-P L15-28W/46W-DALI-840-W	TL 2x70W	28 - 46	5040/8280	120°	1.442
531000034800	LEDTrunk-Uni-P L15-68W/85W-DALI-840-BW	TL 2x100W	68 - 85	12240/15300	75° x 90°	1.442
531000035000	LEDTrunk-Uni-P L15-68W/85W-DALI-840-DF	TL 2x100W	68 - 85	12240/15300	120°	1.442
531000034600	LEDTrunk-Uni-P L15-68W/85W-DALI-840-M	TL 2x100W	68 - 85	12240/15300	90°	1.442
531000034400	LEDTrunk-Uni-P L15-68W/85W-DALI-840-N	TL 2x100W	68 - 85	12240/15300	60°	1.442
531000034200	LEDTrunk-Uni-P L15-68W/85W-DALI-840-W	TL 2x100W	68 - 85	12240/15300	120°	1.442

Accessories

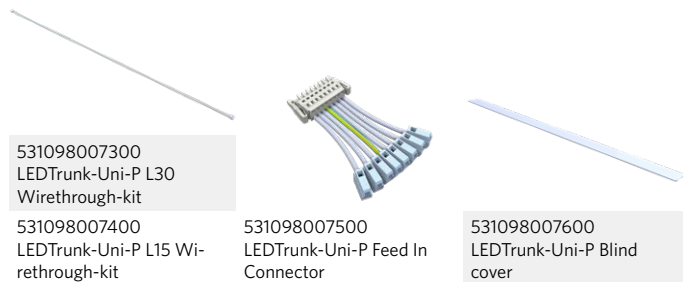

Technical Specifications	
Lifetime (L70)	100,000 h
Lifetime (L80)	70,000 h
Lifetime (L90)	50,000 h
On-/Off-cycles	100,000
Dimmability	On-Off / DALI2
Finishing	White RAL9003
RAL-Number	○ 9003
Colour rendering index (CRI)	> 80
Ingress Protection (IP)	IP20
Protection class	I
Risk group (EN 62471)	RG0
With control gear	Yes
Power factor	> 0.95

Electrical Supply	
Frequency	50 - 60 Hz
Nominal voltage	220 - 240 V
DC input voltage	See catalogue appendix Connection Specifications

Mechanical Properties	
Housing material	Aluminium
Optical material	PMMA / Polycarbonate

Ambient Conditions	
Operating temperature	-20 - 45°C
Application temperature	25°C
Storage environment	-30 - 50°C



Dimensional Drawing (mm)



Type	A	B	C
Module	1496	63	42,7

Installation Possibilities

