

ACR35

Continuous Running Ventilation Unit

Product Datasheet



- Trickle & boost speeds adjustable
- Day logger, hours on trickle and boost, hours boosted by humidity and energy consumption as standard
- Custom 3 digit settings lock
- Timer adjustable
- Humidity sensor
- 7 year warranty


Order Code

ACR35	Continuous running HTP fan
ACR35-SELV	Low voltage continuous running HTP fan
ACR35CV	Continuous running HTP fan with constant volume
ACR35CV-SELV	Low voltage continuous running HTP fan with constant volume

Benefits

The ACR35 & ACR35 low voltage continuous running HTP fan has been designed for bathrooms and kitchens, with a selection of trickle from 5-34l/s. Comes with intermittent to continuous running options, a data logger, custom 3 digit settings lock, hours on trickle and boost, hours boosted by humidity and energy consumption as standard. The HTP fan has an adjustable automatic sensing humidity sensor, a timer adjustable between 1 and 30 minutes and, an in-built boost activated by pullcord, a sleek tile front for discreet installation and comes with a 7 year warranty.

Fan Dimensions (mm)

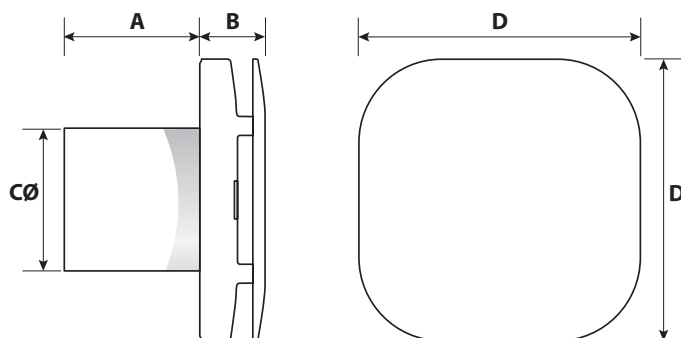

Casing (mm):

A	B	C	D
81	43.3	99	190

Hole diameters (mm):

Walls	Ceilings	Windows
107	107	117

Fan Technical Data

Fan Motor	Extract Capacity	Trickle dB(A) @ 3m
1W on trickle, 8.3W on boost	Trickle	14

Performance Data

Trickle Low	Trickle High	Boost
5l/s	15l/s	35l/s