
Uniflexplus+ Semi-Rigid Duct System
Domestic Range



- Compact, low profile system
- Highly flexible and robust
- Extremely crush resistant
- Quick and easy to install
- PCDB listed
- Suitable for installation in concrete
- Corrosion resistant
- Smooth inner surface with antistatic and antibacterial coating
- Independently tested and accredited for air tightness
- Class D air tightness
- Operating temp.: -20°C to +60°C

A spigot blanking cap is provided for use with single runs of semi-rigid The Uniflexplus+ Semi-Rigid Range sets the standard for easy to install, low profile ducting solutions. The system gives all of the flexibility that semi-rigid ducting provides - without taking up vital space. With minimal components, the system is uncomplicated to ensure a hassle-free, speedy install.


The Uniflexplus+ Semi-Rigid Range is compatible with most wholehouse ventilation systems.

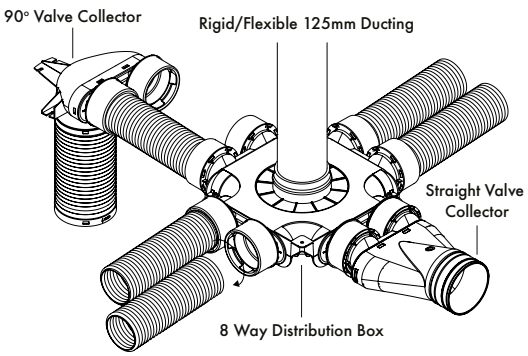

Complete System Setup Examples
The distribution boxes can be mounted vertically on a wall or fixed horizontally onto a ceiling slab to achieve a solution tailored to your need. At a depth of just 90mm, the distribution boxes offer a considerably low-profile solution - they can then be combined with various components to suit on-site needs.

Semi-Rigid ducting is run from distribution boxes and ancillaries to respective rooms in the dwelling. Connecting the Semi-Rigid ducting to components is exceptionally straightforward to allow speedy installation - simply turn the ducting into the spigot until it clicks twice to achieve an airtight mechanical seal.

Rigid or flexible 125mm diameter ducting is then run from the MVHR unit to the distribution box.

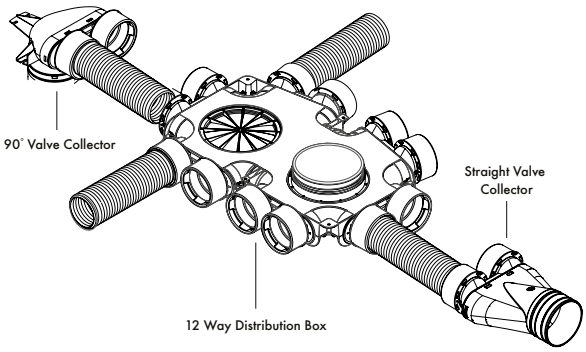

MANROSE®


Straight Valve Collector

Cat. No.	No. Side Spigots	Size Side Spigot	Size Main Spigot	
MRSVC69125	3	Ø69mm	Ø125mm	
MRSVC90125	2	Ø90mm	Ø125mm	

90° Valve Collector

Cat. No.	No. Side Spigots	Size Side Spigot	Size Main Spigot	
MRVC6990125	3	Ø69mm	Ø125mm	
MRVC9090125	2	Ø90mm	Ø125mm	

Distribution Box

Cat. No.	No. Side Spigots	Size Side Spigot	Size Main Spigot	
MRSDB696125*	6	Ø69mm	Ø125mm	
MRDB69SE9125	9	Ø69mm	Ø125mm	
MRDB6912125	12	Ø69mm	Ø125mm	
MRDB6912160	12	Ø69mm	Ø160mm	
MRDB6918160	18	Ø69mm	Ø160mm	
MRLDB6918160*	18	Ø69mm	Ø160mm	
MRDB908125	8	Ø90mm	Ø125mm	
MRLDB909160S*	9	Ø90mm	Ø160mm	
MRDB9012160	12	Ø90mm	Ø160mm	
MRDB9012180	12	Ø90mm	Ø180mm	

*Equipped with acoustic damping material and mounting feet

Semi-Rigid Ducting

Cat. No.	Length	Size	
MRRAD6925	25m	Ø69mm	
MRRAD6950	50m	Ø69mm	
MRRAD9025	25m	Ø90mm	
MRRAD9050	50m	Ø90mm	

Coupler

Cat. No.	Size	
MRCON69	Ø69mm	
MRCON90	Ø90mm	

Radial Duct Cutting Knife

Cat. No.	Size	
MRKNIFE69	Ø69mm	
MRKNIFE90	Ø90mm	

90 Bend

Cat. No.	Size	
MRRB9090	Ø90mm	

Valve

Cat. No.	Model	Size	
MRAV125	Adjustable Round Valve	Ø125mm	
MRAVXL125	Adjustable Round Valve Large	Ø125mm	
MRAVSQ125	Adjustable Square Valve	Ø125mm	
MRAVB125	Blanking Plate*	Ø125mm	
MRAVC125	Valve Collar	Ø125mm	

*Not suitable for MRAVSQ125 model

MANROSE®