

Centrif Duo

- 100mm circular spigot for speedy installation
- Humidity sensing model for automatic operation
- Suitable for both kitchen and utility rooms
- Includes washable grease filter and removable grille assembly for easy cleaning
- Speed set at installation
- Meets current Building Regulations Approved Document F
- Timer model for internal rooms
- Surface mounted



Kitchen & Utility Ventilation

The Centrif Duo range is a series of 100mm centrifugal extract fans for the domestic environment. The range is designed to provide extraction levels that comply with Building Regulation requirements, with special humidity sensing variants for local authority use.

Motor

The motor features greased-for-life ball bearings which allow the fan to be installed at any angle. Insulation is Class E. Double insulated appliance. Supply voltage 220-240V/1/50Hz.

Fast Installation

The Centrif Duo has a 100mm circular spigot. The Flush mounting kit enables the spigot to be converted to a side outlet. The spigot also encloses a built-in, spring operated back draught shutter. The Centrif Duo Range can be wall mounted using a telescopic wall fitting kit available as an accessory (requires a 115mm diameter hole).

Humidistat Control

Humidistat is selectable for either kitchen or utility speed separate to any other control to reduce nuisance noise. Boost operation by pullcord or switch live.

Models

Centrif Duo P (Pullcord)

Two speed kitchen extract fan with pullcord. Choice of two speeds for boost, set at installation.

Model	Stock Ref
P	256120D

Centrif Duo T (Timer)

Two speed kitchen extract fan with adjustable timer between 5-30 minutes. Choice of two speeds for boost, set at installation.

Model	Stock Ref
T	256220D

Centrif Duo DP (Two Speed)

Two speed and Off with pullcord or remote switch. Switches between Off, Low and one of the 2 Boost speeds.

Model	Stock Ref
DP	256320D

Centrif Duo HTP (Humidity)

Intermittent on 1 of 2 speeds (Utility or Kitchen selectable at installation). Operation by integral humidity sensor or pullcord. Separate speeds selectable for humidistat and pullcord. Optional continuous trickle speed available at installation.

Model	Stock Ref
HTP	256420D

Accessories


Flush Mounting Kit

Bezel, clips and 90° duct elbow reduces the need to make good.

Model	Stock Ref
Flush Mounting Kit	439256

Model	Stock Ref
Wall Kit White	254102
Wall Kit Brown	254100
Decoration Frame	442551

Dimensions (mm)

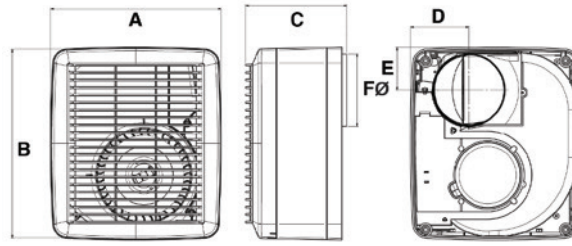

A	B	C	D	E	FØ
231	261	137	79	58	98

Weight 1.75kg

Performance

Model	Performance @ 0 pa											SEC Class	
	High speed		Med speed		Low speed		Power (W)			Sound dB(A) @ 3m			
	m ³ /h	l/s	m ³ /h	l/s	m ³ /h	l/s	Kitchen	Utility	Trickle	Kitchen	Utility		Trickle
Centrif Duo P/T	220	61	130	36	-	-	60	41	N/A	51.8	38	N/A	D
Centrif Duo DP/HTP	220	61	130	36	90	25	60	41	9	51.8	38	21.5	D