



**Vent-Axia**<sup>®</sup>

The UK's Leading Ventilation Company

# Ventilation for New Build Residential

Edition 7

[www.vent-axia.com/new-build](http://www.vent-axia.com/new-build)



# Why choose Vent-Axia

Vent-Axia has been the UK market leader for over 80 years and has vast experience in supplying heat recovery solutions to the UK and countries around the world, whose building regulations demand the most effective, sustainable and energy efficient ventilation solutions.

## We are with you all the way

- Unparalleled customer service
- Industry leading design support
- Providing support and solutions on-site

## Availability

- With the widest distribution network of any manufacturer in the UK we pride ourselves on having products available when and where you need them

## Product solutions

- Whatever the product application, we have the most energy efficient solutions available
- Unique solutions designed to fit into all your buildings
- With absolute focus on the end user we work hard to produce the quietest, most comfortable products for occupiers to live with



**Vent-Axia**<sup>®</sup>

Vent-Axia

# Contents

## INTRODUCTION

Case Studies	4 - 5
Approved Documents F (ADF1) Ventilation Volume 1: Dwellings	6
Approved Documents L (ADL1) Conservation of Fuel and Power Volume 1: Dwellings	7
Approved Document O (ADO) Overheating Mitigation	8
Natural Ventilation with Background Ventilators and Intermittent Extract Fans (formerly System 1)	9
Continuous Mechanical Extract Ventilation (formerly System 3)	10 - 11
Continuous Mechanical Ventilation with Heat Recovery (formerly System 4)	12 - 13
Energy Related Products Directive (ErP)	14
Complete Solutions - Residential Ventilation	15

## VENTILATION PRODUCTS

### Natural Ventilation with Background Ventilators and Intermittent Extract Fans (formerly System 1)

NBR High Pressure Axial Fan Range	18 - 19
Lo-Carbon Silhouette® 100/SELV Bathroom/Toilet Fan	20 - 21
Lo-Carbon Silhouette® 125 Bathroom/Toilet Fan	22
Lo-Carbon Silhouette® 150 Kitchen Fan	23
Lo-Carbon Solo Plus/SELV Centrifugal Bathroom/Toilet Fan	24 - 25
Solo Plus® Bathroom Fan	26 - 27
Centrif® Duo Plus Kitchen/Utility Fan	28 - 29
ACM 100-200 Inline Fan	30 - 31

### Continuous Mechanical Extract Ventilation (formerly System 3)

Lo-Carbon NBR dMEV C	34 - 35
Lo-Carbon NBR dMEV	36 - 37
Lo-Carbon Multivent MVDC-MS/MSH MEV	38 - 39
Lo-Carbon Sentinel Multivent/Plus MEV	40 - 43
Lo-Carbon MVDC-MSH Uniflex Multivent MEV	44 - 45

### Continuous Mechanical Ventilation with Heat Recovery (formerly System 4)

Lo-Carbon Sentinel Kinetic® Range Overview	48 - 51
Lo-Carbon Sentinel Econiq	52 - 59
Lo-Carbon Sentinel Econiq Passivhaus Certified	60 - 67
Lo-Carbon Sentinel Kinetic® BH MVHR Unit	68 - 71
Lo-Carbon Sentinel Kinetic® FH MVHR Unit	72 - 75
Lo-Carbon Sentinel Kinetic® Plus MVHR Unit	76 - 79
Lo-Carbon Sentinel Kinetic® High Flow MVHR Unit	80 - 83

Lo-Carbon Sentinel Kinetic® Cooker Hood SELV MVHR Unit	84 - 87
Lo-Carbon Sentinel Kinetic® Horizontal MVHR Unit	88 - 93
Pull-out System Hood SELV	94
HR100R/RS Horizontal MVHR Unit	95 - 96
Integra Horizontal MVHR Unit	97 - 98
Integra Plus EC Horizontal MVHR Unit	99 - 100

## Overheating Solutions

Lo-Carbon NBR Cool Unitary Fan	104 - 105
NBR CoolBox Kits	106 - 109
Acoustic Residential Purge Ventilator	110 - 111
Lo-Carbon Sentinel Econiq Cool-Flow	112 - 119
Lo-Carbon Sentinel Econiq Cool (KERS)	120 - 127

## PIV Systems

Lo-Carbon PoziDry Pro Loft PIV	130 - 131
Lo-Carbon PoziDry Compact PIV	132 - 133

## Ducting

Thermflow 200mm Ducting	136 - 137
Uniflexplus+ Semi-Rigid Duct System	138 - 139
Vent-Axia Pure Air NOX Filtration System, PM10 & PM2.5	140 - 141
Wholehouse Attenuators	142 - 143
Ducting & Accessories	144 - 149

## Fire Protection

Pyrocheck Fire Airbricks	150 - 151
Fan Fire Collars	152 - 153
Vent Duct Fire Sleeves	154 - 158
Fire Rated Air Valves	159

## Terminations

Circular Supply & Exhaust Diffusers	160
Uniflexplus+ RV Adjustable Valve	161 - 162
Low Resistance Inlet/Outlet Air Brick	163
Universal Roof Vents	164

## Non Residential Heat Recovery

Sentinel Apex	166 - 183
---------------	-----------





Sentinel Kinetic Cooker Hood

## Clippers Quay Vent-Axia's Cooker Hood MVHR Provides Fresh Air for Residents

Vent-Axia has supplied ventilation to the impressive Clippers Quay in Salford. Vent-Axia ventilation systems were specified to provide good indoor air quality for all 614 apartments. The largest build to rent development outside London, the scheme comprises 614 apartments and is set to be home to more than 1,200 residents and seven new retail businesses. One of the UK's largest providers of MEP services, HE Simm, specified and installed the ventilation for Grainger plc, the UK's largest listed professional landlord, who owns and manages the property.

At the project, 550 Lo-Carbon Sentinel Kinetic Cooker Hoods were specified to provide ventilation. The five-building development also offers a 24-hour gym, communal living rooms, co-working space, a cinema room and more.

The Lo-Carbon Sentinel Kinetic Cooker Hood from Vent-Axia combines a cooker hood with MVHR unit in one. It was selected for the majority of the apartments at Clippers Quay since there was no extra cupboard space for an MVHR unit. Successfully meeting the specified overheating requirements and strict noise requirements for the development, the Sentinel Kinetic Cooker Hood works seamlessly as an MVHR unit supplying energy efficient ventilation to the home and, when the cooker hood is needed, it is simply pulled out to provide a 100% purge of cooker fumes.

The unique Sentinel Kinetic Cooker Hood provides all the advantages of MVHR with all the advantages of a cooker hood. Designed to fit in a 600mm wide aperture/cupboard above a hob, the unit fits inside a kitchen unit for a seamless and discreet finish. The telescopic hood is pulled out when required to trigger the MVHR unit to switch to a pre-defined boost speed and the summer bypass automatically opens to prevent cooking by-products entering the heat recovery cell. The hood incorporates removable metal grease filters; low energy lamps to illuminate the hob surface; and is available with a white or brushed aluminium front trim. Additional SELV models are available for scenarios where it is required for the cooker hood to be as close as 550mm to an electric hob.

With the highest rating on SAP PCDB in its class, the Sentinel Kinetic Cooker Hood is highly energy efficient and also incorporates SELV models, reducing the distance needed between the hood and the electric hob from 650mm to 550mm - making it even more economical with space. The unit also features an integral fire damper within the hood, this safety feature completely seals the hood as soon as flames or high temperature fumes enter the MVHR unit and thus prevents fire or products of combustion being spread around the property. The hood is connected to the heat recovery unit by a galvanised steel duct with access for cleaning and, as an additional safety feature, the duct also contains a thermal cut-out fuse which turns off the MVHR unit in the event of excessive temperature in the airway.

The Sentinel Kinetic Cooker Hood also offers an integral humidity sensor option that increases speed in proportion to relative humidity levels, saving energy and reducing noise. The sensor also reacts to small but rapid increases in humidity, even if the normal trigger threshold is not reached, ensuring adequate ventilation and minimal disturbance. The night time relative humidity setback feature suppresses nuisance tripping as humidity gradually increases with falling temperature. Both units also feature a revolutionary programmable 100% summer bypass to ensure year-round thermal comfort avoiding overheating, particularly where windows cannot be opened.

"We were keen to specify MVHR ventilation for the project but there was no extra cupboard space in the apartments to install it. The Vent-Axia Cooker Hood was therefore ideal as it combines a cooker hood and MVHR in one unit and it met the specified overheating and strict noise requirements."

Glyn Fryer, HE Simm Project Manager





## Tomorrow Home Vent-Axia provides another solution for the Future Home Standard



NBR dMEV C



Sentinel Kinetic Cooker Hood

Housebuilder Lovell Homes has selected Vent-Axia's Lo-Carbon Sentinel Kinetic Cooker Hood MVHR (Mechanical Ventilation with Heat Recovery) and the Lo-Carbon NBR dMEV C (decentralised Mechanical Extract Ventilation) as part of its Tomorrow Home project at Cornish Park in Spennymoor, County Durham. The Tomorrow Home project consists of demonstration homes built to test alternative electric heating systems directly against each other, as well as assessing the effective performance of a range of sustainable technologies, including ventilation.

Tomorrow Home features two identical, three-bedroom, semi-detached homes that have been built to an interpretation of the anticipated Future Homes Standard, with improved building fabric. In one of the three-bedroom homes a Vent-Axia Lo-Carbon Sentinel Kinetic Cooker Hood MVHR has been installed, the other has been fitted with Lo-Carbon NBR dMEV C. Lovell Homes are working with Teesside University and the Net Zero Industry Innovation Centre to monitor electricity usage, internal temperature, humidity and air quality within the homes.

Data gathered from the demonstration homes will enable Lovell Homes to gauge the various technologies in-use and their performance, including ventilation. The project will last 12 months and will give the housebuilder an opportunity to test MVHR and dMEV over an extended period of time and allow the company to gain the knowledge to develop its designs and specifications to meet the forthcoming challenges of the Future Homes Standard and Net Zero.

"Vent-Axia's Lo-Carbon NBR dMEV C is currently fitted as standard in Lovell open market sales house types, with dMEV recommended as a solution in the Future Homes Standard consultation document. Meanwhile, we chose the Lo-Carbon Sentinel Kinetic Cooker Hood for this trial because we see MVHR as being the most probable ventilation strategy for Net-Zero homes as airtightness is increased. We look forward to monitoring the performance of both these technologies in the two homes,"

"We want to ensure that the thermal comfort and ventilation meets the needs of our customers. We will also evaluate the experiences of individuals who use the homes."

"We are delighted that Lovell Homes has chosen our Lo-Carbon NBR dMEV C unit and Sentinel Kinetic Cooker Hood MVHR to test in its demonstration homes. The Lo-Carbon NBR dMEV C was designed to achieve the latest Building Regulation ventilation rates while improving indoor air quality (IAQ), using the lowest number of installed fans, and the most efficient and quietest fans on the market", explains Steve Pearce, Product Manager at Vent-Axia. "Meanwhile, the Sentinel Kinetic Cooker Hood offers whole house heat recovery ventilation combined with extraction during cooking all in one unit, saving valuable space and improving IAQ."

**Iain Gillies**  
Divisional Design & Innovation Manager at Lovell Homes.

# Approved Documents F (ADF1) Ventilation

## Volume 1: Dwellings

Approved Documents F (ADF) and L (ADL) of the Building Regulations were originally issued in October 2010 with the latest revisions in 2021. They place much greater emphasis on effective design, installation, commissioning and operation of ventilation systems. The objective is to maintain good levels of indoor air quality whilst maximising carbon reduction through correctly specified and designed systems, competent installation minimising losses of the systems, verified performance once installed and correct operation by the homeowner.

### ADF Overview

This section explains how to achieve compliance, looking at the three key areas in detail: Specification and Design, Installation and Commissioning, Operation and Maintenance. However, it is important to read the full document to ensure you are working towards full compliance.

ADF1, is the document which addresses the performance requirements of different ventilation systems. Factors such as airflow rates, noise, commissioning and occupiers operation are all covered on the below web page.

[www.vent-axia.com/legislation](http://www.vent-axia.com/legislation)

### Ventilation Rates

The ventilation rate and system type for a given property is calculated dependant on the designed airtightness of the property and the as-built airtightness. This will also define the amount of background ventilation (trickle vents) that are required.

ADF1 Table 1.6 Types of ventilation system

System type	Dwellings covered by the guidance
Natural ventilation	Less airtight dwellings <sup>(1)</sup>
Continuous mechanical extract ventilation	All dwellings
Mechanical ventilation with heat recovery	All dwellings

For situations outside the scope of the above table, expert advice should be sought for the design, sizing and position of ventilators to provide effective ventilation.

<sup>(1)</sup> Less airtight dwellings are dwellings which have one of the following:

- A design air permeability higher than  $5\text{m}^3/(\text{h}\cdot\text{m}^2)$  at 50Pa.
- An as-built air permeability higher than  $3\text{m}^3/(\text{h}\cdot\text{m}^2)$  at 50Pa.

### Installation and Commissioning

The previous guidance on good installation practice and a commissioning that was set out in a supporting document known as the Domestic Ventilation Compliance Guide has now been included within ADF1. This means there is now much greater emphasis on the quality of the installation and commissioning with the requirement to ensure that all systems are installed and commissioned correctly with a requirement for the information to be provided to Building Control. Put simply all systems should be designed and installed to ensure that ventilation not only delivers the required airflow, but also does it efficiently and quietly. ADF also links in with the competent persons schemes and training programmes run by the industry.

### Things to Remember

Airflow performance  Minimum energy efficiency limits  Good installation  Use by occupiers

### ADF Airflows, Background Ventilators and Noise

There are some considerations that need to be taken into account dependant on which ventilation system is being used. These are outlined here but are shown in more detail in the subsequent separate sections for each system.

#### Natural Ventilation with Background Ventilators and Intermittent Extract Fans

- There are different levels of equivalent area for background vents for a single storey dwelling compared to a multi floor dwelling.
- Background vents must be fitted in all rooms

#### Continuous Mechanical Extract Ventilation

- Background ventilators should NOT be fitted in wet rooms

### Noise

Noise is now covered by the building regulations. As our buildings become more energy efficient and more airtight, the amount of noise entering them from outside is reduced. This has the effect of making them much quieter inside. That means that any noise made inside the house will be more noticeable so ADF now recommends a maximum noise level for any continuous system of 30dB  $L_{Aeq,T}$  in noise sensitive rooms (bedrooms and living rooms) and 45dB  $L_{Aeq,T}$  in less noise sensitive rooms.

### Airflow

The tables below shows the airflow rates as described in ADF.

ADF1 Table 1.1 Minimum extract ventilation rates for intermittent extract systems

Room	Intermittent extract rate (l/s)
Kitchen (cooker hood extracting to the outside)	30
Kitchen (no cooker hood or cooker hood does not extract to the outside)	60
Utility room	30
Bathroom	15
Sanitary accommodation <sup>(1)</sup>	6

<sup>(1)</sup> As an alternative for sanitary accommodation, the purge ventilation guidance may be used.

ADF1 Table 1.2 Minimum extract ventilation rates for continuous extract systems<sup>(1)</sup>

Room	High rate (l/s)	Continuous rate
Kitchen	13	The sum of all extract ventilation in the dwelling on its continuous rate should be at least the whole dwelling ventilation rate given in the table below
Utility room	8	
Bathroom	8	
Sanitary accommodation	6	

<sup>(1)</sup> If the continuous rate of ventilation provided in a room is equal to or higher than the minimum high rate specified in the table, no extra ventilation is needed.

ADF1 Table 1.3 Minimum whole dwelling ventilation rates determined by the number of bedrooms

Number of bedrooms <sup>(1)(2)</sup>	Minimum ventilation rate by number of bedrooms (l/s)
1	19
2	25
3	31
4	37
5	43

<sup>(1)</sup> If the dwelling only has one habitable room, a minimum ventilation rate of 13l/s should be used.

<sup>(2)</sup> For each additional bedroom, add 6l/s to the values in above table.

In addition to the above the minimum continuous system rate must not be less than  $0.3\text{l/s/m}^2$  of the total floor area of the property



# Approved Documents L (ADL1) Conservation of Fuel and Power

## Volume 1: Dwellings

### ADL Overview

ADL, Conservation of fuel and power, covers the efficiency and energy consumption of ventilation products, among others. Putting it simply ADL has improved the energy efficiency targets for buildings by 30%, with further improvements through target emission rate. There is also an opportunity to save energy through ventilation by using SAP Performance Characteristics Database (PCDB), formerly known as Appendix Q. This is a method by which energy efficient ventilation systems can be selected and the energy benefit be added back into the SAP calculation.

[www.vent-axia.com/legislation](http://www.vent-axia.com/legislation)

### What does this mean for ventilation?

Ventilation uses energy in two ways. Firstly, mechanical systems use electricity to power the motors and secondly heat is lost as heated air is extracted from a building. This is now dealt with by a minimum energy efficiency level for all ventilation systems being incorporated to the document. This is achieved by placing limitations in both the amount of electricity a motor can use, maximum specific fan power (SFP), and a minimum heat recovery efficiency of heat exchangers in systems that can recover heat.

We recommend that best practice is followed when designing and installing a system, as the product performance is affected by both areas.

### Ventilation

There are now three main systems specifically described in the ADF 1 and these are as follows:

- Natural Ventilation with Background Ventilators and Intermittent Extract Fans (formerly System 1)
  - Only suitable for dwellings that are "less airtight"
- Continuous Mechanical Extract Ventilation (formerly System 3)
  - MEV – Centralised systems
  - dMEV – Decentralised systems
  - Suitable for dwelling of any airtightness
- Continuous Mechanical Ventilation with Heat Recovery (MVHR) (formerly System 4).
  - Suitable for dwellings of any airtightness

We will be looking at these systems in more detail under separate sections later in this brochure.

### Summary

The key areas for consideration when selecting ventilation systems are:

- Design and as built airtightness of the property
  - Leaky House - Properties with a design airtightness of greater than  $5\text{m}^3/\text{h}/\text{m}^2$  @50Pa. Properties with as-built airtightness greater than  $3\text{m}^3/\text{h}/\text{m}^2$  @ 50Pa
  - Non Leaky House - Properties with a design airtightness of less than  $5\text{m}^3/\text{h}/\text{m}^2$  @50Pa. Properties with as-built airtightness less than  $3\text{m}^3/\text{h}/\text{m}^2$  @ 50Pa
- Airflow performance and relevant background ventilation
- Minimum energy efficiency limits
- Good installation
- Good commissioning
- Use by occupiers

### ADL Minimum efficiencies of motors and heat exchangers

#### Energy Efficiency

Energy Efficiency As mentioned earlier, there are energy efficiency limits for all of the systems covered in the building regulations as well as some minimum heat exchanger efficiencies for heat recovery products. These are as follows:

#### Specific Fan Power (SFP)

- For intermittent extract ventilation systems:  $0.5\text{W}/(\text{l}\cdot\text{s})$ .
- For continuous mechanical extract ventilation systems:  $0.7\text{W}/(\text{l}\cdot\text{s})$ .
- For continuous supply ventilation systems:  $0.5\text{W}/(\text{l}\cdot\text{s})$ .
- For continuous mechanical supply and extract ventilation systems:  $1.5\text{W}/(\text{l}\cdot\text{s})$ .

#### Heat Exchanger Efficiency

There is now a requirement for any heat exchanger in a residential property to be a minimum of 73% efficient. Many of the Heat Recovery units Vent-Axia offer have heat recovery efficiencies of up to 93%.

In addition to this a summer bypass facility must be included in the heat recovery unit to enable control of the heat recovery performance.

#### Design and Commissioning

Ventilation systems should meet the ventilation needs of the dwelling, in accordance with ADF1. Systems should be designed so that they can be commissioned to required ventilation rates so that spaces are not significantly overventilated. To enable this the ventilation system must have a variable speed control as part of its design.

#### New Build & Refurbishment

As a final point It should be highlighted that the building Regulations apply equally to New Build projects and Refurbishment / Additions of rooms to existing properties.

#### Scotland

The above building regulations are for England, Wales and Northern Ireland (although the documents referenced are for England the detail is primarily the same).

Scotland has a slightly different set of Building Regulations which can be viewed at the below web page, section Annex 3A.

[www.gov.scot/publications/building-standards-technical-handbook-april-2024-domestic](http://www.gov.scot/publications/building-standards-technical-handbook-april-2024-domestic)

One of the key differences is that in Scotland the whole house ventilation rates are calculated by "apartment" (habitable room) and not bedroom, this can result in a requirement for slightly higher ventilation rates compared to the rest of the UK. The floor area calculation is however the same.

# Approved Document O (ADO) Overheating Mitigation

In England the Building Regulations were amended on 15th December 2021, with changes made to Approved Document L, Conservation of Fuel and Power and Approved Document F, Ventilation. Alongside these changes, there was the introduction of Approved Document O, Overheating.

Approved Document O stipulates various means to prevent the overheating of new developments in which in turn states "Mechanical cooling may only be used where insufficient heat is capable of being removed from the indoor environment without".

Alongside Approved Document O, there is CIBSE's TM59, Design methodology for the assessment of overheating risk in homes. This sets limits depending on the ventilation type, either naturally or mechanically ventilated

## Part O

2.10 Excess heat should be removed from the residential building by any of the following means.

- a. Opening windows (the effectiveness of this method is improved by cross-ventilation).
- b. Ventilation louvres in external walls.
- c. **A mechanical ventilation system.**
- d. **A mechanical cooling system**

## TM59

**Naturally ventilated homes** require that within Bedrooms, between the hours of 22:00 to 07:00, the temperature shall not exceed 26°C, which equates to 32 hours.

**Mechanically ventilated homes** require that occupied rooms should not exceed and operative temperature of 26 °C, for more than 3% of the annual occupied annual hours. Occupied annual hours is undefined and unclear within CIBSE's Guide A.

Vent-Axia can support your requirements with our range of services and product, from consultation through to design.


From Unitary extract fans with built-in temperature sensors and our Cool Box kits for inline heat extraction all the way through to mechanical cooling with our Econiq Cool-Flow combined MVHR and DX Cooling unit.

## Product Solutions

	Lo-Carbon NBR Cool Unitary Fan	104 - 105
	NBR CoolBox Kits	106 - 109
	Acoustic Residential Purge Ventilator	110 - 111
	Lo-Carbon Sentinel Econiq Cool-Flow	112 - 119
	Lo-Carbon Sentinel Econiq Cool (KERS)	120 - 127



# Natural Ventilation with Background Ventilators and Intermittent Extract Fans (formerly System 1)

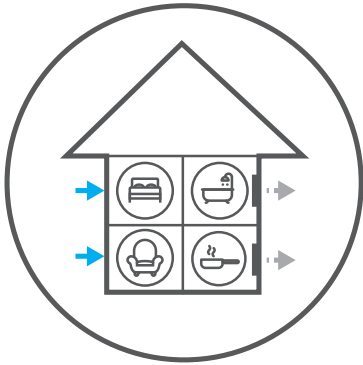

Background ventilators and Intermittent extract fans should be installed in accordance with the relevant sections of ADF 1. Key sections are mentioned below, however for full clarity please check the actual ADF 1 document.

- Background Ventilators and Intermittent extract fans are only suitable for "Less airtight dwellings" as defined in ADF 1 Paragraph 1.45 and table 1.6 (see page 6).
  - Dwellings with a design air permeability of  $>5\text{m}^3/(\text{h.m}^2)$  @ 50Pa
  - Dwellings with an as-built air permeability of  $>3\text{m}^3/(\text{h.m}^2)$  @ 50Pa
- Extract fans must be installed in all Kitchens, Utility rooms, Bathrooms, En-Suite and Sanitary accommodation
- Design flow rates should be in accordance with Table 1.1 of ADF 1 (see page 6)
- The system specific guidance should be followed in accordance with paragraphs 1.45 to 1.59 of ADF 1

- Fans should be mounted as high as practical and no more than 400mm below the ceiling.
- Flexible ducting should be kept to a minimum, no more than 1.5m in length and ideally used just for final connections.
- Internal doors must be installed with a minimum undercut of 10mm from finished floor level (20mm from unfinished)
- All mechanical ventilation systems (including intermittent fans) must be commissioned and the airflow rates for each room (extract fan) recorded on the commissioning sheet in accordance with section 4 of ADF 1 and Building Control must be notified.
- Background ventilators should be installed in all rooms (including kitchens, wet rooms and habitable rooms) in accordance with Table 1.7 of ADF 1

Table 1.7 Minimum equivalent area of background ventilators for natural ventilation

Room	Minimum equivalent area of background ventilators for dwellings with multiple floors	Minimum equivalent area of background ventilators for single storey dwellings
Habitable rooms	8000mm	10,000mm
Kitchen	8000mm	10,000mm
Utility room	No minimum	No minimum
Bathroom	4000mm	4000mm
Sanitary accommodation	No minimum	No minimum

## ADF and ADL Compliant

The requirement for reduced specific fan powers means that no intermittent fan can use more than 0.5 W/l/s.

Vent-Axia offers a fully compliant Lo-Carbon intermittent range which meets both ADF and ADL.

## Further information

For further detailed installation guidance please refer to the Vent-Axia Domestic Ventilation Installation Guide and the relevant product Fitting and Wiring instructions.


[www.vent-axia.com/install-guide](http://www.vent-axia.com/install-guide)

[www.vent-axia.com/fitting-wiring](http://www.vent-axia.com/fitting-wiring)


[www.vent-axia.com/legislation](http://www.vent-axia.com/legislation)

## Product Solutions

	NBR High Pressure Axial Fan Range	18 - 19
	Lo-Carbon Silhouette <sup>®</sup> 100/125/150	20 - 23
	Lo-Carbon Solo Plus/SELV	24 - 25

	Solo Plus <sup>®</sup>	26 - 27
	Centrif <sup>®</sup> Duo Plus	28 - 29
	ACM 100-200/250-315	30 - 31

# Continuous Mechanical Extract Ventilation (formerly System 3) (dMEV)

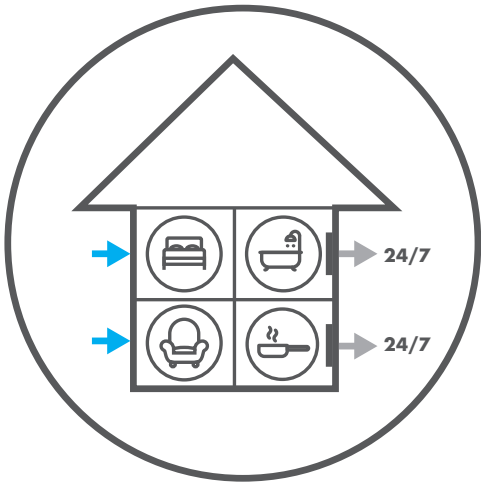

Decentralised Mechanical Extract Ventilation (dMEV) Systems should be installed in accordance with the relevant sections of ADF 1. Key sections are mentioned below, however for full clarity please check the actual ADF 1 document.

- Decentralized Mechanical Extract Ventilation Systems (dMEV) are suitable for both "Highly Airtight" and "Less Airtight" dwellings as defined in ADF 1 Paragraph 1.45 and table 1.6.
- Continuously running extract fans must be installed in all Kitchens, Utility rooms, Bathrooms, En-Suite and Sanitary accommodation
- Design minimum high flow rates for each room (boost rate) should be in accordance with ADF 1 table 1.2 (see page 6)

- The continuous whole dwelling flow rate (normal rate) must be the greater of  $0.3l/s/m^2$  of floor area and the flow rate defined by the number of bedrooms as given in ADF table 1.3 (see page 6)
- The system specific guidance should be followed in accordance with paragraphs 1.60 to 1.66 of ADF 1
- Fans should be mounted as high as practical and no more than 400mm below the ceiling.
- Background ventilators should not be installed in wet rooms and must provide a minimum equivalent area of  $4000mm^2$  in accordance with Paragraphs 1.64 and 1.65 of ADF 1.
- Flexible ducting should be kept to a minimum, no more than 1.5m in length and ideally used just for final connections.
- For SAP compliance dMEV fans should be installed with rigid ducting
- Internal doors must be installed with a minimum undercut of 10mm from finished floor level (20mm from unfinished)
- All mechanical ventilation systems (including dMEV fans) must be commissioned and the airflow rates for each room (extract fan) for both normal and boost recorded on the commissioning sheet in accordance with section 4 of ADF 1. Building Control must be notified with this information.

#### Further information

For further detailed installation guidance please refer to the Vent-Axia Domestic Ventilation Installation Guide and the relevant product Fitting and Wiring instructions.

[www.vent-axia.com/install-guide](http://www.vent-axia.com/install-guide)

[www.vent-axia.com/fitting-wiring](http://www.vent-axia.com/fitting-wiring)

[www.vent-axia.com/legislation](http://www.vent-axia.com/legislation)

## Product Solutions



Lo-Carbon NBR dMEV C  
dMEV Unit

34 - 35




Lo-Carbon NBR dMEV  
dMEV Unit

36 - 37



# Continuous Mechanical Extract Ventilation (formerly System 3) (MEV)

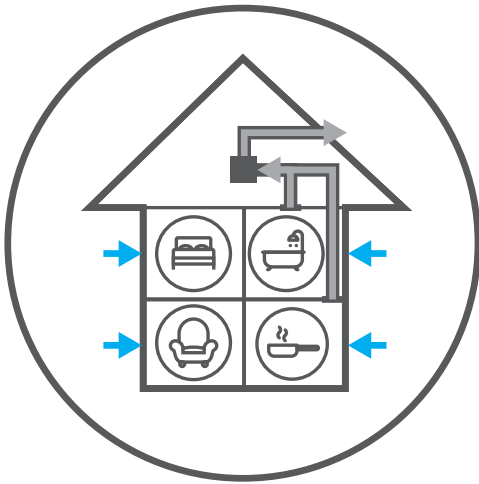

Central Mechanical Extract Ventilation (MEV) Systems should be installed in accordance with the relevant sections of ADF 1. Key sections are mentioned below, however for full clarity please check the actual ADF 1 document.

- Central Mechanical Extract Ventilation Systems (MEV) are suitable for both "Highly Airtight" and "Less Airtight" dwellings as defined in ADF 1 Paragraph 1.45 and table 1.6.
- A central continuously running MEV unit must be installed with extract points in all Kitchens, Utility rooms, Bathrooms, En-Suite and Sanitary accommodation.
- Design minimum high flow rates for each room (boost rate) should be in accordance with ADF 1 table 1.2 (see page 6)

- The continuous whole dwelling flow rate (normal rate) must be the greater of  $0.3l/s/m^2$  of floor area and the flow rate defined by the number of bedrooms as given in ADF table 1.3 (see page 6)
- The system specific guidance should be followed in accordance with paragraphs 1.60 to 1.66 of ADF 1
- Extract terminals should be adjustable and be mounted as high as practical, no more than 400mm below the ceiling.
- Background ventilators should not be installed in wet rooms and must provide a minimum equivalent area of  $4000mm^2$  in accordance with Paragraphs 1.64 and 1.65 of ADF 1.
- Flexible ducting should be kept to a minimum, no more than 1.5m in length and ideally used just for final connections.
- For SAP compliance MEV systems should be installed with rigid or semi-rigid ducting
- Internal doors must be installed with a minimum undercut of 10mm from finished floor level (20mm from unfinished)
- All mechanical ventilation systems must be commissioned and the airflow rates for both normal and boost in each room (extract terminals) recorded on the commissioning sheet in accordance with section 4 of ADF 1. Building Control must be notified with this information.

#### Further information

For further detailed installation guidance please refer to the Vent-Axia Domestic Ventilation Installation Guide and the relevant product Fitting and Wiring instructions.

[www.vent-axia.com/install-guide](http://www.vent-axia.com/install-guide)

[www.vent-axia.com/fitting-wiring](http://www.vent-axia.com/fitting-wiring)

[www.vent-axia.com/legislation](http://www.vent-axia.com/legislation)

## Product Solutions



Lo-Carbon MVDC-MS/MS-H Multivent MEV Unit


38 - 39



Lo-Carbon Sentinel Multivent/Plus MEV Unit

40 - 43

# Continuous Mechanical Ventilation with Heat Recovery (formerly System 4) (MVHR)

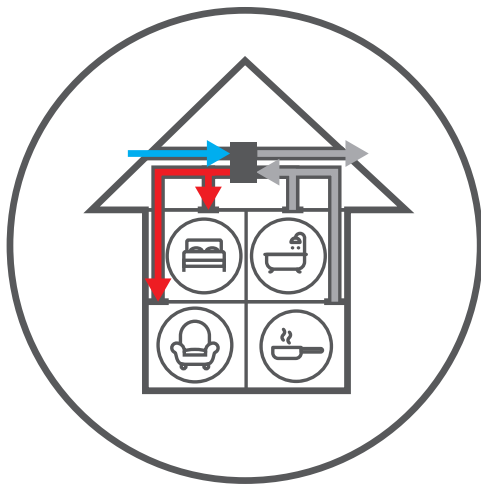

Mechanical Ventilation with Heat Recovery systems should be installed in accordance with the relevant sections of ADF 1. Key sections are mentioned below, however for full clarity please check the actual ADF Volume 1 - 2021 Edition

- Central Mechanical Extract Ventilation Systems (MEV) are suitable for both "Highly Airtight" and "Less Airtight" dwellings as defined in ADF 1 Paragraph 1.45 and table 1.6.
- The efficiency of MVHR systems should improve as dwellings become more airtight.
- A central continuously running MVHR unit must be installed with extract terminals in all Kitchens, Utility rooms, Bathrooms, En-Suite and Sanitary accommodation and supply terminals in all habitable rooms.
- Design minimum high flow rates for each wet room (boost rate) should be in accordance with Table 1.2 (see page 6)
- The continuous whole dwelling flow rate (normal rate) must be the greater of  $0.3\text{l/s/m}^2$  of floor area and the flow rate defined by the number of bedrooms as given in table 1.3 (see page 6)
- Supply and Extract flows should be balanced at both normal and boost rate.
- The system specific guidance should be followed in accordance with paragraphs 1.67 to 1.73 of ADF 1
- Extract terminals should adjustable and be mounted as high as practical, no more than 400mm below the ceiling. Supply terminals should be located to avoid draughts.
- Background ventilators should not be installed in any rooms. If they

are installed they must be kept closed to prevent unintended air paths, paragraphs 1.72 of ADF 1.

- Flexible ducting should be kept to a minimum, no more than 1.5m in length and ideally used just for final connections.
- For SAP compliance MVHR systems should be installed with rigid or semi-rigid ducting
- Internal doors must be installed with a minimum undercut of 10mm from finished floor level (20mm from unfinished)
- MVHR systems require a condensate connection to the waste water system via a condensate trap
- External grills are recommended to be a minimum of 2.0m apart.
- All mechanical ventilation systems must be commissioned and the airflow rates for both normal and boost in each room (extract terminals) recorded on the commissioning sheet in accordance with section 4 of ADF 1. Building Control must be notified with this information.

#### Further information

For further detailed installation guidance please refer to the Vent-Axia Domestic Ventilation Installation Guide and the relevant product Fitting and Wiring instructions.















[www.vent-axia.com/install-guide](http://www.vent-axia.com/install-guide)

[www.vent-axia.com/fitting-wiring](http://www.vent-axia.com/fitting-wiring)

[www.vent-axia.com/legislation](http://www.vent-axia.com/legislation)



## Product Solutions

	Lo-Carbon Sentinel Econiq MVHR Unit	48 - 59
	Lo-Carbon Sentinel Econiq Passivhaus Certified MVHR Unit	60 - 67
	Lo-Carbon Sentinel Kinetic® Range Overview	48 - 51
	Lo-Carbon Sentinel Kinetic® BH MVHR Unit	68 - 71
	Lo-Carbon Sentinel Kinetic® FH MVHR Unit	72 - 75
	Lo-Carbon Sentinel Kinetic® Plus MVHR Unit	76 - 79
	Lo-Carbon Sentinel Kinetic® High Flow MVHR Unit	80 - 83
	Lo-Carbon Sentinel Kinetic® Cooker Hood MVHR Unit	84 - 87
	Lo-Carbon Sentinel Kinetic® Horizontal MVHR Unit	88 - 93
	Pull-out System Hood	94
	HR100R/RS Horizontal MVHR Unit	95 - 96
	Integra Horizontal MVHR Unit	97 - 98
	Integra Plus EC Horizontal MVHR Unit	99 - 100
	Sentinel Apex	166 - 183

# Energy Related Products Directive (ErP)

As part of the ongoing drive for energy efficiency within Europe, as of January 2016 ventilation devices over 30 Watts now come under the scope of the Energy Related Products Directive. The legislation sets minimum performance criteria across a range of fans and ventilation devices under two sets of legislation; 'residential' ventilation and 'non-residential' ventilation. Additional and stricter criteria came into force as of January 2018.

## Residential Products

Residential Products has a secondary directive which requires some products to carry an energy label as described below:

### MVHR and MEV products

These products do come into the scope of the legislation and will carry an energy label. There are some minimum energy efficiency requirements as well as the requirement for a summer bypass on heat recovery models.

### Energy Efficiency Class


Products within the scope of ErP now need to carry a rating that shows their Energy Efficiency Class. This information is called a 'SEC Class' and is provided in all product literature and on the energy label.

A product's SEC class is affected by how the product is controlled. This is referred to as Local Demand Control (LDC) and indicates how many 'sensors' a fan should have. The regulations require that single room fans, such as a bathroom fan, should have at least 1 sensor. Units that are ducted, such as an MEV unit, need to have more than one sensor. Examples of these are a pull cord/light switch or humidistat.

In our literature, where appropriate we have shown the rating if an additional LDC was added to a product. In those cases, you will see a table similar to the one below which has a heading (incl LDC). This is so you can choose the most efficient option for your needs.

### SEC Rating Example

Model	SEC Class*
Lo-Carbon Sentinel Econiq S	A+

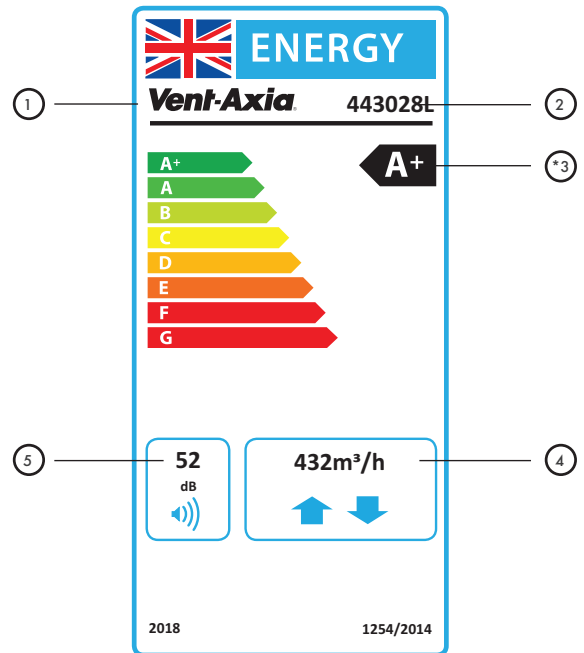

- ① Manufacturers name
- ② Model name
- ③ Energy Efficiency Class
- ④ Max flow rate
- ⑤ Sound Level

## Non-Residential Ranges

Non-Residential products have had minimum performance and efficiency levels established, but there is no requirement to introduce energy labels. Some products have been updated with new motors and enabled for speed control.

Non-Residential ranges are split into a number of different categories dependent on their application and function. These can be described as follows:

1. Fans
2. Uni-directional Ventilation Units
3. Bi-directional Ventilation Units

# Complete Solutions - Residential Ventilation

There are very few suppliers of products and services within the building and construction industry that can provide a complete and fully integrated service to their clients.

With over 80 years' ventilation experience, Vent-Axia continues to lead the way in the development of new products and systems. As legislation drives the development of ventilation systems and services Vent-Axia provides a dedicated team of mechanical ventilation systems experts within the Vent-Axia New Build - Residential Team.

This experienced systems ventilation team and the full support service provides the contractor with an alternative to specially trained internal staff and hence reduces the liabilities for the client.

## Design



### Vent-Axia Design Support Service

From an initial enquiry Vent-Axia will take full responsibility of system design, supply of its equipment, commissioning and balancing. Completed Inspection Checklists are provided for the client and contractor.

Vent-Axia firmly believes significant advantages can be achieved by its clients in having all diverse and complex project services integrated under one roof. Key advantages are effective co-ordination, economies of scale and a seamless support structure. Vent-Axia has a dedicated team of experienced, highly qualified technicians, service personnel and engineers who are at the forefront of engineering technology.

### From Enquiry to Project

Once an enquiry has been received, either direct from the customer or following a site visit by one of Vent-Axia's experienced field representatives, a dedicated team is assigned to the project.

### Project to Design

Using bespoke ventilation computer aided design software, Vent-Axia will produce sample system designs, showing unit location, ducting runs, air flow rates and noise considerations. This enables the designer to produce an accurate price for the supply of ventilation unit, ducting and accessories for the whole development.

## Product Supply



With over 2000 distributors nationwide, Vent-Axia can ensure availability and on-time service to site.

## Commission



### Commissioning and Balancing

Commissioning and balancing is undertaken by Vent-Axia Supervisors or approved contractors. Using anemometer hoods, airflow readings are taken and recorded on commissioning sheets.

Any adjustments to the unit or the adjustable diffusers are made to ensure the system meets the design intent. This stage is essential to ensure that the installed performance requirements of the Building Regulations are satisfied. Vent-Axia can provide installation training certified by NICEIC to ensure installation, commissioning and balancing are conducted using best practice.

### Complete Project

When a project has been completed, the Vent-Axia commitment does not end. A full handover pack for each property will be provided including the completed Air Flow Calculation Sheets and Operating and Maintenance manuals. The handover pack also includes a copy of the system design, fitting and wiring documentation and commissioning figures.

### After Sales Service

Experience in the marketplace shows that products will last longer and operate more efficiently when properly serviced. Vent-Axia clients entrust the company to care for their installed equipment and in so doing gain significant benefits in terms of improved environmental conditions, reduced downtime, greater energy efficiency, reduced running costs and lower capital expenditure.





## Natural Ventilation with Background Ventilators and Intermittent Extract Fans (formerly System 1)



Continuing our commitment to Lo-Carbon we are proud to introduce the latest additions to the range. In this section you will find Lo-Carbon solutions for any intermittent fan application.

In axial or centrifugal, wall, ceiling or window applications in bathrooms or kitchens we have a Lo-Carbon fan offering up to 90% energy saving over the equivalent traditional fan.

We are the first manufacturer in the UK to provide such a complete offer at a price point which makes these products a real alternative.

**Vent-Axia**<sup>®</sup>





NBR High Pressure Axial Fan Range  
Bathroom/Toilet Fan

18 - 19



Lo-Carbon Silhouette® 100/SELV  
Bathroom/Toilet Fan

20 - 21



Lo-Carbon Silhouette® 125  
Bathroom/Toilet Fan

22



Lo-Carbon Silhouette® 150  
Kitchen Fan

23



Lo-Carbon Solo Plus/SELV  
Centrifugal Bathroom/Toilet Fan

24 - 25



Solo Plus®

26 - 27



Centrif® Duo Plus

28 - 29



ACM 100-200

30 - 31

# NBR High Pressure Axial Fan Range

- Designed to perform under pressure
- Compliant with System 1 from Approved Document F
- High performance, low power
- Open front grille design
- As low as 22dB(A) noise levels
- 100mm, 125mm and 150mm options to choose from
- As low as 5W power consumption
- Timer, Humidity and PIR options now available
- 5 Year Warranty
- IP45



The NBR High Pressure Axial Fan range offers high powered axial ventilation with a wide range of control and sizing options. This ensures that all your sites look consistent and that your teams can spend less time figuring out how to install different fans and focus on more important things.


The NBR High Pressure Axial Fan range is an intermittent fan family that offers a stylish appearance with high pressure capabilities meaning more duct for the same fan. A 100mm NBR High Pressure Axial Fan can withstand 18Pa back pressure while still achieving the 15l/s building regulations requirement for a bathroom.

With a highly efficient AC motor, the NBR High Pressure Axial Fan range can achieve energy efficient and also quiet ventilation with power consumption as low as 5W and noise levels as low as 22dB(A) at 3m.

## Model

Model	Stock Ref
100mm Basic	496575
100mm Timer	496576
100mm Humidity Timer	496577
100mm PIR	496578
125mm Basic	496579
125mm Timer	496580
125mm Humidity Timer	496581
150mm Basic	496582
150mm Timer	496583
150mm Humidity Timer	496584




## Dimensions (mm)

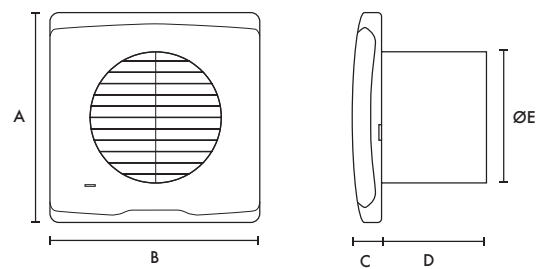

Model	A	B	C	D	ØE
NBR High Pressure Axial Fan 100mm	160	160	22	80	99
NBR High Pressure Axial Fan 125mm	185	185	29	100	120
NBR High Pressure Axial Fan 150mm	227	227	30.5	111	146



## Performance Guides

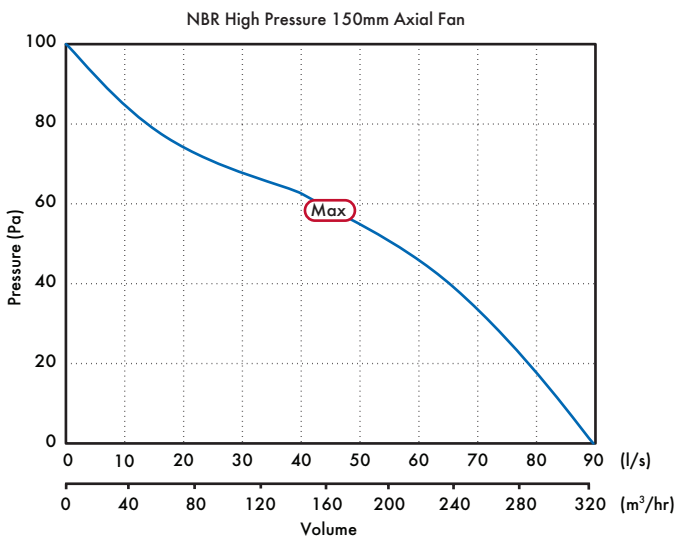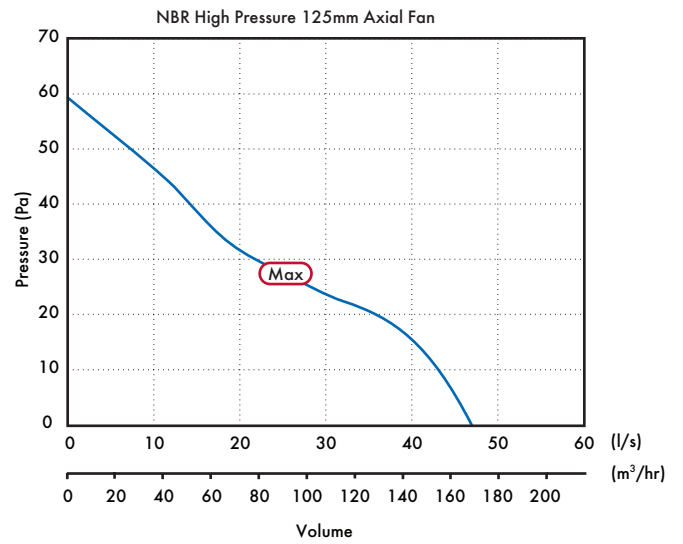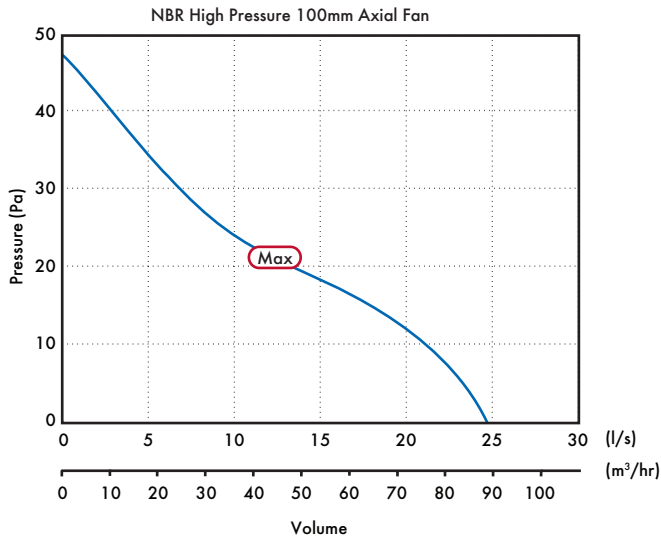

## Technical Data

Model	Speed	Motor Power (W)	Performance (l/s)	Sound @ 3m dB(A)	IP rating
NBR High Pressure Axial Fan 100mm	High	7.5	24.7	33.0	IP45
	Low*	5.0	20.0	22.0	IP45
NBR High Pressure Axial Fan 125mm	High	14.0	47.5	37.3	IP45
	Low*	10.5	25.0	29.0	IP45
NBR High Pressure Axial Fan 150mm	High	19.0	90.0	43.0	IP45
	Low*	9.0	37.0	32.0	IP45

\*Low Speed - HT Models only

# Lo-Carbon Silhouette 100/SELV

- Models Basic/Timer/Humidity & Timer
- Low power consumption - Lower running costs
- Fully opening and closing non-transparent shutters - Improved insulation and privacy
- Meets current Building Regulations Approved Document F & L
- 1 of 2 speeds selectable at installation
- Blue power indication light (except B model) - Modern aesthetics
- Ball bearing motors for vertical or horizontal application
- Unique humidity sensor track - Improved response
- 5 year motor warranty
- IPX4 rated - IPX7 rated (SELV)
- Suitable for wall, ceiling, panel and window mounting



## Slimline Bathroom Ventilation

With a slim profile of only 17mm, Lo-Carbon Silhouette blends in with the wall surface to provide an unobtrusive installation. Lo-Carbon Silhouette has an FID performance of up to 30l/s. It can be ceiling/panel mounted and connected to an appropriate duct run to the outside.

## Safety Extra Low Voltage (SELV) Fan

Safety Extra Low Voltage (SELV) is designed for areas where a fan has to be fitted within zone 1 in a room containing a fixed bath or shower according to IEE wiring regulations. The Silhouette SELV can be safely installed within the spray area. The fan is rated IPX7, control is by the supplied mains safety isolating transformer with 12V DC SELV output, which is sited away from any source of spray and out of reach of a person using a fixed bath or shower. SELV transformer to BS EN 60742.

## Models

### Lo-Carbon Silhouette 100B/SELV 100SVB

100mm bathroom/toilet fan with back draught shutter.

Model	Stock Ref
100B	441624
SELV 100SVB	441511A

### Lo-Carbon Silhouette 100T/ SELV 100SVT (Timer)

100mm bathroom/toilet fan with integral adjustable electronic overrun timer (5-30 minutes), indicator light which operates on manual override only, and back draught shutter.

Model	Stock Ref
100T	441625
SELV 100SVT	441512A

### Lo-Carbon Silhouette 100HT (Humidistat/Timer)

100mm bathroom/toilet fan with adjustable auto humidity sensor from 60-90% RH and overrun timer, indicator light which operates on manual override only, and back draught shutter.

Model	Stock Ref
100HT	441626

### Lo-Carbon Silhouette 100H SELV (Humidistat)

100mm bathroom/toilet fan with ambient response humidity sensor from 60-90% RH, indicator light which operates on manual override only, and back draught shutter.

Safety Extra Low Voltage version.

Model	Stock Ref
SELV 100SVH	441513A

## Accessories

### Wall Kit

Fixing hole diameter 117mmØ

Model	Stock Ref
Wall Kit White	254102
Wall Kit Brown	254100

### Window Kit

Fixing hole diameter 117mmØ


Model	Stock Ref
Window Kit	442947




17mm actual profile

## Dimensions (mm)

Panel

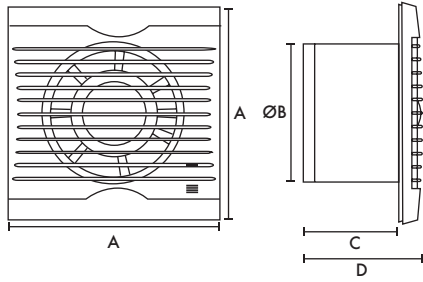

Wall Kit

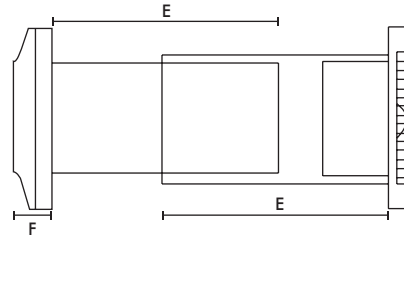


A	BØ	C	D	E	F
160	99	115	132	200	32

SELV Transformer (W X H X D) 87 X 87 X 33

Weight 0.6kg

## Performance Guide

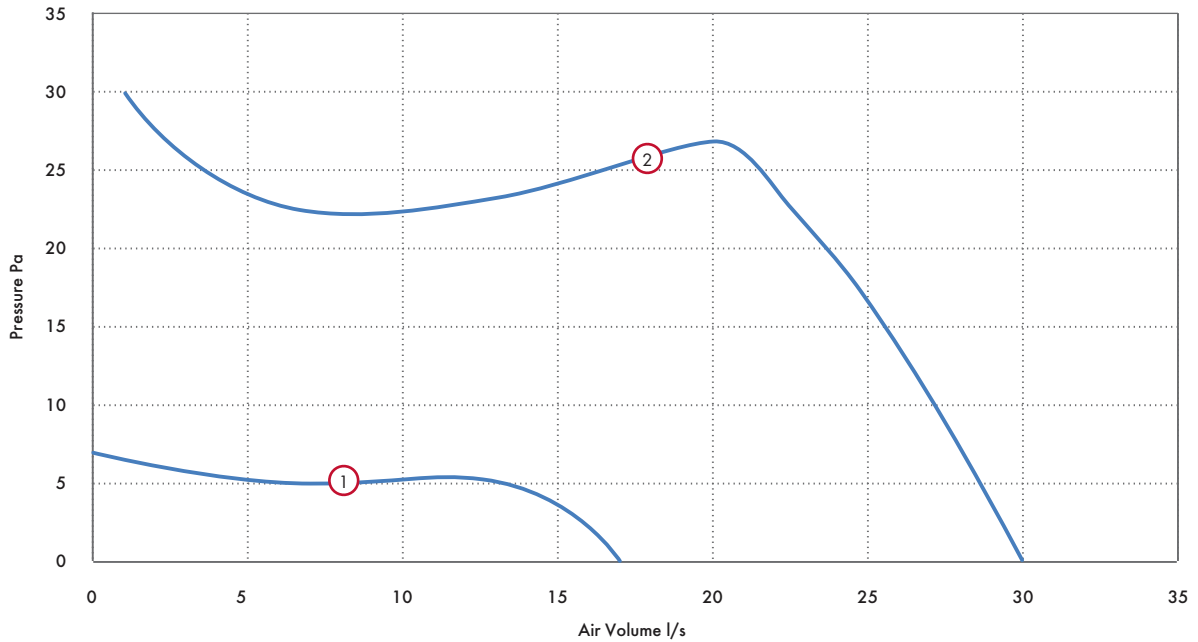

Area	Model	Curve Ref	Extract Performance - FID			Sound dB(A)	SFP (W/l/s)
			m <sup>3</sup> /h	l/s	Watts	@ 3m	@ OP <sub>a</sub>
Toilet	Lo-Carbon Silhouette 100 B/T/HT/SVB/SVT/SVH	1	60	17	3.4	34	0.20
Bathrooms		2	108	30	8.7	38	0.30

For window mounting: shutter cannot be used and must be removed

# Lo-Carbon Silhouette 125

- Models Basic/Timer/Humidity & Timer
- Low power consumption - Lower running costs
- Quiet running
- Fully opening and closing non transparent shutters - Improved insulation and privacy
- 1 of 2 speeds selectable at installation
- IPX4 rated
- Ball bearing motors for vertical or horizontal application
- Unique humidity sensor track - Improved response
- 5 year motor warranty
- Suitable for wall, ceiling and panel mounting



## Slimline Bathroom Ventilation

With a slim profile of only 18mm, Lo-Carbon Silhouette blends in with the wall surface to provide an unobtrusive installation. Lo-Carbon Silhouette has a FID performance up to 160m<sup>3</sup>/h. It can be ceiling/panel mounted and connected to an appropriate duct run to the outside.

## Models

### Lo-Carbon Silhouette 125B

125mm bathroom/toilet fan with indicator light and back draught shutter.

Model **125B** Stock Ref **446483**

### Lo-Carbon Silhouette 125T (Timer)

125mm bathroom/toilet fan with integral adjustable electronic overrun timer (5-30 minutes), indicator light which operates on manual override only, and back draught shutter.

Model **125T** Stock Ref **446484**

### Lo-Carbon Silhouette 125HT (Humidistat/Timer)

125mm bathroom/toilet fan with integral adjustable auto humidity sensor from 60-90% RH and overrun timer, indicator light which operates on manual override only, and back draught shutter. Datalogger as standard on all Lo-Carbon humidity controlled Silhouette fans.


Model **125HT** Stock Ref **446485**

## Accessories

Model **Wall Kit White** Stock Ref **455226**


## Dimensions (mm)

Panel

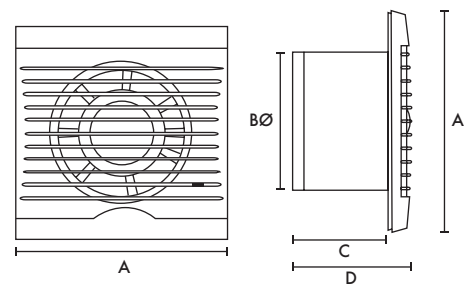

A	BØ	C	D
187	125	131	149

## Performance Guide

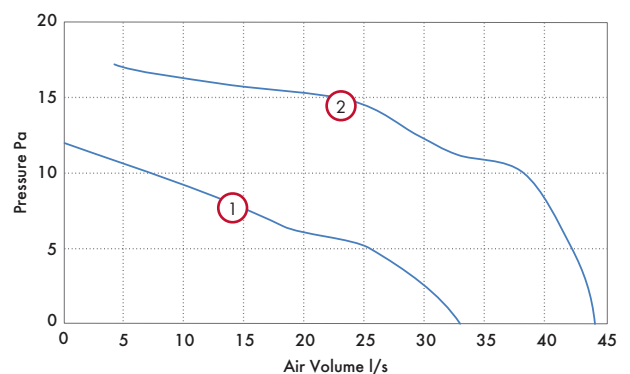

Model	Curve Ref	Extract Performance			Sound dB(A) @ 3m	SFP (W/l/s) @ 0Pa
		m <sup>3</sup> /h	l/s	Watts		
Lo-Carbon Silhouette	Low ①	120	33	4.5	33	0.14
125B/T/HT	High ②	160	44	8	37	0.18



# Lo-Carbon Silhouette 150

- Stylish ultra low profile grille
- Downstream airflow guide vanes for improved pressure development
- Ball bearing motors for vertical or horizontal application
- Wall kit design meets Building Regulations Approved Document F requirements
- 5 year Motor Warranty
- 1 of 2 speeds selectable at installation
- IPX4 rated
- Low Specific Fan Power
- Suitable for wall, ceiling and panel mounting



## Slimline Lo-Carbon Kitchen Ventilation

The Lo-Carbon Silhouette 150 range is designed for modern living. With a profile of only 19mm on the kitchen models, Lo-Carbon Silhouette blends in with the wall surface to provide an unobtrusive installation.

Mounted in the centre of the fan, beneath the ultra slim profile grille, are the electronics, incorporating a humidistat (HT model) for detecting a change in internal humidity or an overrun timer option that is adjustable between 5 and 30 minutes. FID performance of 65l/s, double insulated. Power consumption only 9 Watts.

## Models

### Lo-Carbon Silhouette 150B

150mm kitchen fan with indicator light and back draught shutter.

Model	Stock Ref
150B	441628A

### Lo-Carbon Silhouette 150T (Timer)

150mm kitchen fan with integral adjustable electronic overrun timer (5-30 minutes), indicator light which operates on manual override only and spring back draught shutter.

Model	Stock Ref
150T	441629A

### Lo-Carbon Silhouette 150HT (Humidistat/Timer)


150mm with integral adjustable auto humidity sensor from 60-90% RH and overrun timer, indicator light which operates on manual override only and back draught shutter. Datalogger as standard on all Lo-Carbon humidity controlled Silhouette fans.

Model	Stock Ref
150HT	441630A

## Accessories


Model	Stock Ref
Wall Kit White	140902
Wall Kit Brown	140903

## Dimensions (mm)

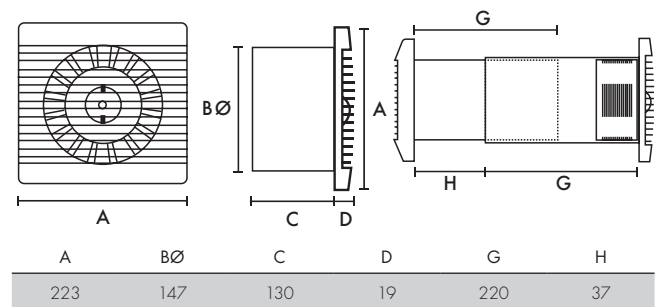

Weight 1.75kg

## Performance Guide

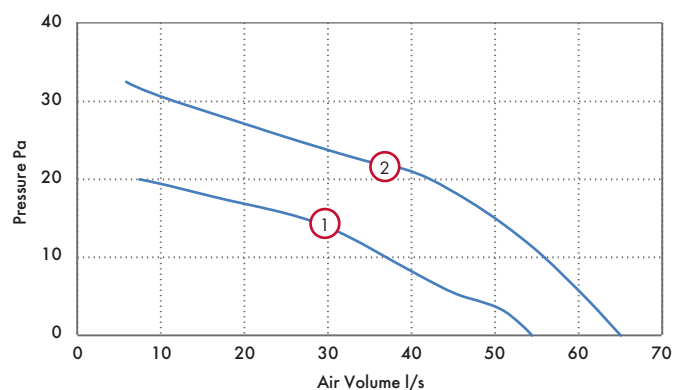

Model	Setting	Curve Ref	Extract Performance			Sound	SFP
			m³/h	l/s	Watts	dB(A) @ 3m	(W/l/s) @ 0Pa
150B/T/HT	Utility Setting	1	200	55	6	35	0.11
	Kitchen Setting	2	234	65	9	43	0.14

Fixing hole diameter 152mmØ (when wall kit used)

# Lo-Carbon Solo Plus/SELV

- Up to 70% energy saving
- Filterless as standard - innovative impeller design means no need for a filter
- 5 year Lo-Carbon motor warranty
- Meets current Building Regulations Approved Documents F & L
- IPX4 rated - IPX7 rated (SELV)
- Flush or surface mountable with adjustable rear or side exit spigot
- SELV models suitable for installation over or within reach of a shower or bath
- Extremely low sound levels
- Suitable for wall, ceiling and panel mounting
- SELV Models - Supplied with a remote transformer



## Long Life Ventilation

The Lo-Carbon Solo Plus range from Vent-Axia has been specially designed for through the wall and ducted applications, suitable for internal bathrooms, toilets and other small rooms. Finished in white, the Lo-Carbon Solo Plus can be flush or surface mounted, with a 2 position 100mm circular spigot for rear entry or connecting to a vertical ducting system. The powerful centrifugal impeller allows installations using 100mm ducting in straight runs, whilst still achieving 15l/s as required by Building Regulations Approved Document F.

Continuous running products, such as the Lo-Carbon Solo Plus, installed in all wet areas of a dwelling are classed as a wholehouse ventilation system and therefore only need to move the amount of air as outlined in table 5.1a and 5.1b of Building Regulations Approved Document F.

The Lo-Carbon Solo Plus has an adjustable boost speed which is set at installation variable between a wall or duct setting for boost/override operation to meet Building Regulations thus ensuring minimum energy usage and low sound levels. All models have an optional speed for constant trickle ventilation (12l/s), selectable at installation. Depending on the model, the fan will switch from trickle (if selected) to boost via the pullcord/light switch/humidity sensor/PIR.

All models can be wall, panel or ceiling mounted and can be connected to either circular, rectangular or Vent-Axia's flat ducting. Enclosure of the electrical components is manufactured from flame retardant grade material.

## Safety Extra Low Voltage Fan (SELV)

Designed for areas where a fan has to be fitted over or within Zone 1 in a room containing a fixed bath or shower according to IEE wiring regulations (BS 7671), the Lo-Carbon Solo Plus SELV fan can be safely installed within the spray area. The fan is rated IPX7. Control is by the supplied mains safety isolating transformer unit with 12V DC SELV output, which is sited away from any source of spray and out of reach of a person using a fixed bath or shower. Controller Supply voltage 220-240V/1/50Hz. Output to fan SELV 12V DC.

## Models

### Lo-Carbon Solo Plus P/SELV P (Pullcord)

Flush or surface mountable. Control by Pullcord. 2 Speed. Constant trickle option. Adjustable boost. In-built Lo-Carbon controller.

Model	Stock Ref
P	427481B
SELV P	427485B

### Lo-Carbon Solo Plus T/SELV T (Timer)

Flush or surface mountable. Control by room light or switch. 2 Speed. Constant trickle option. Adjustable boost. Adjustable timer overrun. Delay on timer. In-built Lo-Carbon controller.

Model	Stock Ref
T	427482B
SELV T	427486B

### Lo-Carbon Solo Plus HT/SELV HT (Humidistat/Timer)

Flush or surface mountable. Humidity controlled fan with override pullcord. Constant trickle option. Adjustable boost. Adjustable timer overrun. Delay on timer. Adjustable humidity sensor. In-built Lo-Carbon controller. Datalogger as standard on all Lo-Carbon humidity controlled Solo Plus fans.

Model	Stock Ref
HT	427483B
SELV HT	427487B

### Lo-Carbon Solo Plus TM/SELV TM (Timer/PIR)

Flush or surface mountable. Control by integral PIR detector. 2 Speed. Constant trickle option. Adjustable boost. In-built Lo-Carbon controller.

Model	Stock Ref
TM	427484B
SELV TM	427488B

## Accessories

### Lo-Carbon Solo Plus Bezel

Used when flush mounting - reduces the need to make good.

Model Stock Ref  
 Bezel 404106


Model Stock Ref  
 Wall Kit White 254102  
 Wall Kit Brown 254100

### Filter Pack (1 per pack)

The design of the Lo-Carbon Solo Plus means that it does not need a filter. However, if you are going to install the product in a heavily greasy environment, you may want to protect the product by fitting a filter.

Model Stock Ref  
 Filter Pack 449265


## Dimensions (mm)

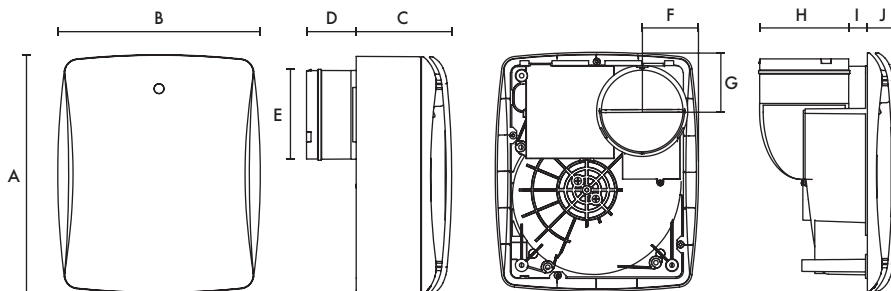

A	B	C	D	EØ	F	G	H	I	J
263	224	106	55	98	62	65	98	21	34

Weight 2.2kg, SELV Weight 2.7kg. Dimensions: (W x H x D) 87x87x33mm.

## Performance Guide (Duct Mode)

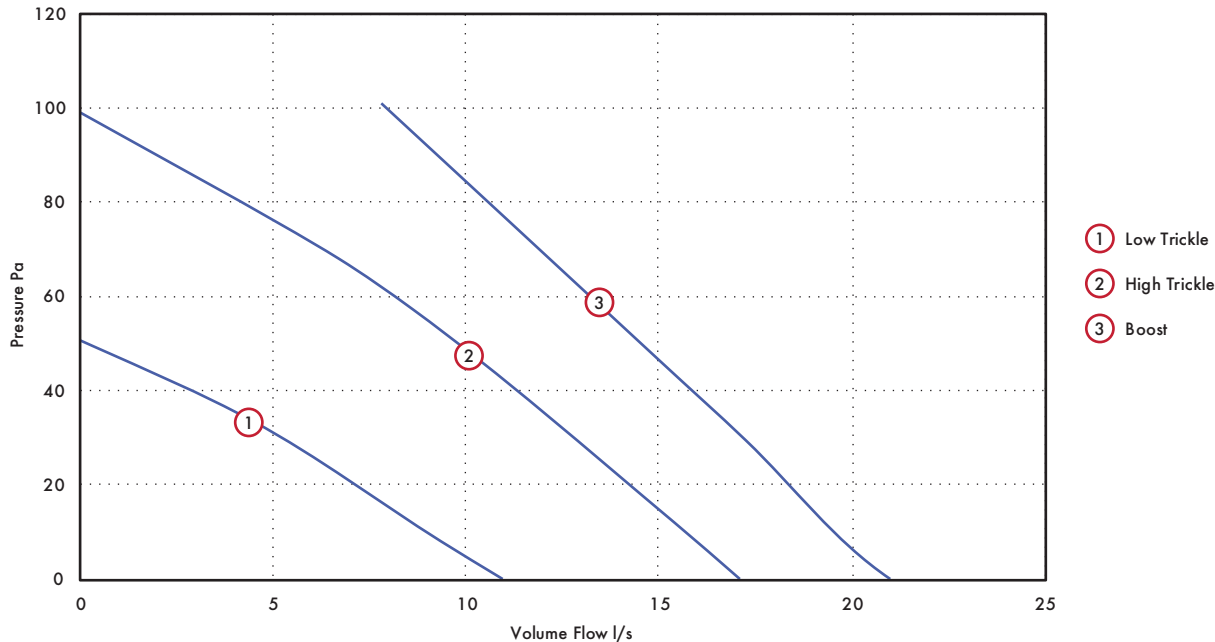

Model		Extract Performance l/s (m³/h)			Power consumption - Watts			dB(A) @ 3m			SFP (W/l/s) @ 0Pa
		Boost	High trickle	Low Trickle	Boost	High trickle	Low Trickle	Boost	High trickle	Low Trickle	
Lo-Carbon Solo Plus/SELV P/T/HT/TM	Wall mode	18 (64.8)	12 (43.2)	8 (28.8)	6	2.9	2.3	33.5	27	23.5	0.28
	Duct mode	21 (75.6)	17 (61.2)	11 (39.6)	8.4	5.3	3.2	35.5	33	26	0.29

Tested at 240VAC @ 50Hz

# Solo Plus

- Filterless as standard - innovative impeller design means no need for a filter
- Meets current Building Regulations Approved Documents F & L requirements for domestic bathrooms and toilets
- IPX4 rated
- Flush or surface mountable
- Adjustable rear or side exit spigot
- Extremely low sound levels
- Suitable for wall, ceiling and panel mounting



## Bathroom & Toilet Ventilation

The Solo Plus range from Vent-Axia has been specially designed for through the wall and ducted applications, suitable for internal bathrooms, toilets and other small rooms. Finished in white, the Solo Plus can be flush or surface mounted, with a 100mm circular spigot for rear entry or connecting to a vertical ducting system. The spigot can also be adjusted for sideways exhaust enabling recessed ceiling installations within limited ceiling voids. The powerful centrifugal impeller allows for installations with longer duct runs using 100mm ducting, whilst still achieving 15 l/s as required by Document F of the current Building Regulations.

Continuous running products, such as the Solo Plus installed in all wet areas of a dwelling are classed as a wholehouse ventilation system and therefore, only needs to move the amount of air as laid down in table 1.1b of Document F.

The Solo Plus has a choice of two boost/override motor speeds set at installation, medium (17l/s) or high (22l/s), with an optional constant trickle speed (9l/s), also selectable at installation except in the P model. Depending on the model, the fan will switch from trickle (if selected) to boost (medium or high) via the pullcord/light switch/humidity sensor/PIR.

All models can be wall, panel or ceiling mounted and can be connected to either circular, rectangular or Vent-Axia's flat ducting. Enclosure of the electrical components is manufactured from flame retardant grade material.

Supply voltage 220-240V/1/50Hz.

## Models

### Solo Plus P (Pullcord)

Flush or surface mountable. Control by pullcord single speed; 1 of the 3 speeds selectable at installation.

Model	Stock Ref
P	427477B

### Solo Plus T (Timer)

Flush or surface mountable. Constant trickle option. 2 Speed. Adjustable timer overrun. Delay on timer option.

Model	Stock Ref
T	427478C

### Solo Plus HT (Humidistat/Timer)

Flush or surface mountable. Humidity controlled fan with override pullcord. Constant trickle option. Adjustable timer overrun. Delay on timer option. Adjustable humidity sensor.

Model	Stock Ref
HT	427479C

### Solo Plus TM (Timer/PIR)

Flush or surface mountable. Control by integral PIR detector. Constant trickle option. 2 Speed.

Model	Stock Ref
TM	427480B

## Accessories

### Solo Plus Bezel

Used when flush mounting, reduces the need to make good.

Model	Stock Ref
Bezel	404106

Model	Stock Ref
Wall Kit White	254102
Wall Kit Brown	254100


### Filter pack (1 per pack)

The design of the Solo Plus means that it does not need a filter. However, if you are going to install the product in a heavily greasy environment, you may want to protect the product by fitting a filter.

Model	Stock Ref
Filter pack	449265




## Dimensions (mm)

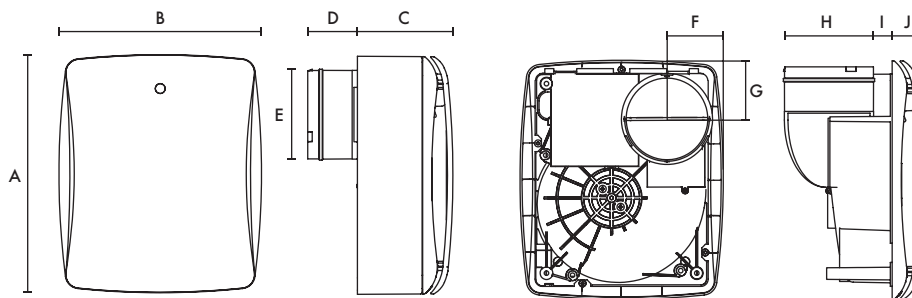

A	B	C	D	EØ	F	G	H	I	J
263	224	106	55	98	62	65	98	21	34

## Performance Guide

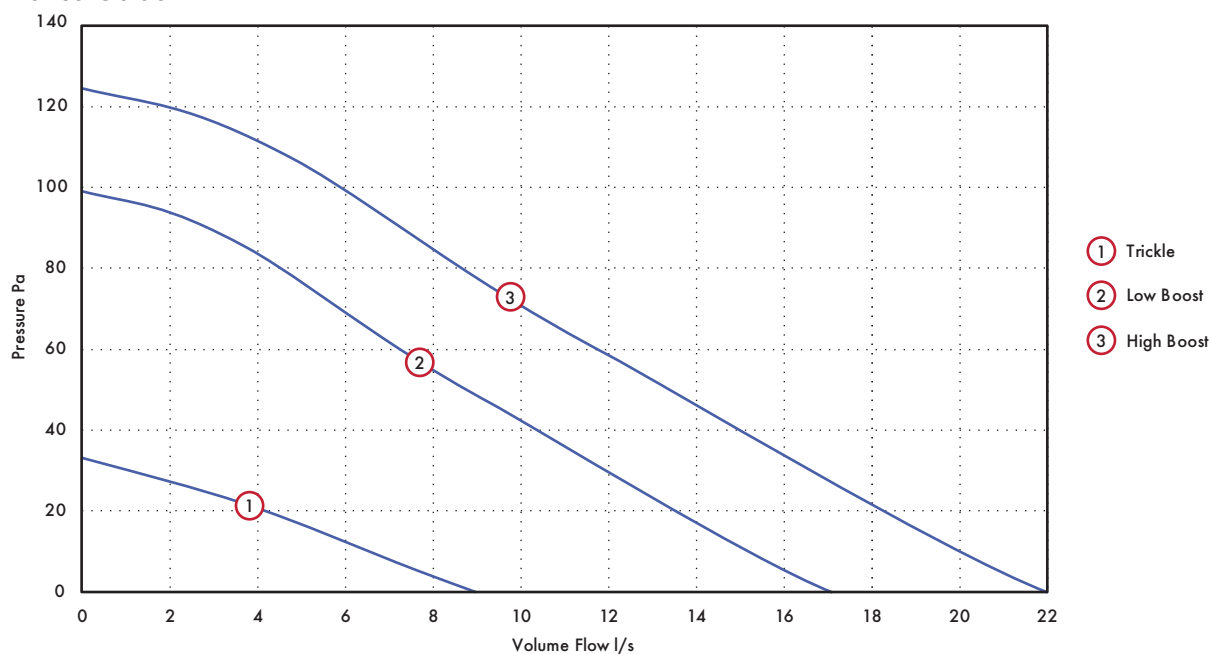

Model	Extract Performance l/s (m <sup>3</sup> /h) - FID			Watts			dB(A) @ 3m		
	Max Boost	Min Boost	Trickle	Max Boost	Min Boost	Trickle	Max Boost	Min Boost	Trickle
Solo Plus P/T/HT/TM	22 (80)	17 (61)	9 (32)	17.1	10.9	6.3	34.5	24	11.5

Tested at 240VAC @ 50Hz

# Centrif Duo Plus

- Meets current Building Regulations Approved Document F
- Optional filter available
- Easy installation
- Fan can be wall or ceiling mounted
- Suitable for both kitchen and utility rooms
- Constant trickle boost speed available on DP & HTP models
- IPX4 Rated



## Ultra Quick Ventilation

Centrif Duo Plus is designed to provide extraction levels that comply with Building Regulations Approved Document requirements, with special humidity sensing variants for local authority use.

The Centrif Duo Plus is for kitchens and utility rooms and large bathrooms. Surface mounting directly into standard 100mm diameter ducting, through the wall or ceiling installation.

## Fast Installation

The Centrif Duo Plus has a 100mm circular spigot. The Flush mounting kit enables the spigot to be converted to a side outlet.

The spigot also encloses a built-in, spring operated back draught shutter. The Centrif Duo Plus Range can be wall mounted using a telescopic wall fitting kit available as an accessory (requires a 115mm diameter hole). For ceiling applications the range is ducted either through a soffit outlet or roof cowl assembly. There is convenient access for wiring which accommodates surface or recessed installation.

## Improved Humidistat Control

Humidistat is selectable for either kitchen or utility speed separate to any other control to reduce nuisance noise. Boost operation by pullcord or switch live.

## Models

### Centrif Duo Plus P (Pullcord)

Two speed kitchen extract fan with pullcord. Choice of two speeds for boost, set at installation.

Model	Stock Ref
P	431613B

### Centrif Duo Plus T (Timer)

Two speed with adjustable timer between 2-30 minutes. Choice of two speeds for boost, set at installation.

Model	Stock Ref
T	431614B

### Centrif Duo Plus DP (Two speed)

Two speed and Off with pullcord or remote switch. Switches between Off, low and one of the 2 boost speeds.

Model	Stock Ref
DP	431615B

### Centrif Duo Plus HTP (Humidity/ Timer/ Pullcord)

Intermittent on 1 of 2 speeds (Utility or Kitchen selectable at installation). Operation by integral humidity sensor or pullcord. Separate speeds selectable for humidistat and pullcord. Optional continuous trickle speed available at installation.

Model	Stock Ref
HTP	431616B

## Accessories


### Flush Mounting Kit

Bezel, clips and 90° duct elbow reduces the need to make good.

Model	Stock Ref
Flush Mounting Kit	439256

Model	Stock Ref
Centrif Duo Plus Filter	439927
Wall Kit White	254102
Wall Kit Brown	254100
Decoration Frame	442551


## Dimensions (mm)

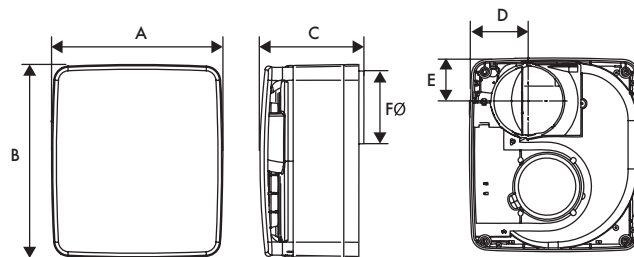

A	B	C	D	E	FØ
231	261	140	79	58	98

Weight 1.75kg

## Performance Guide

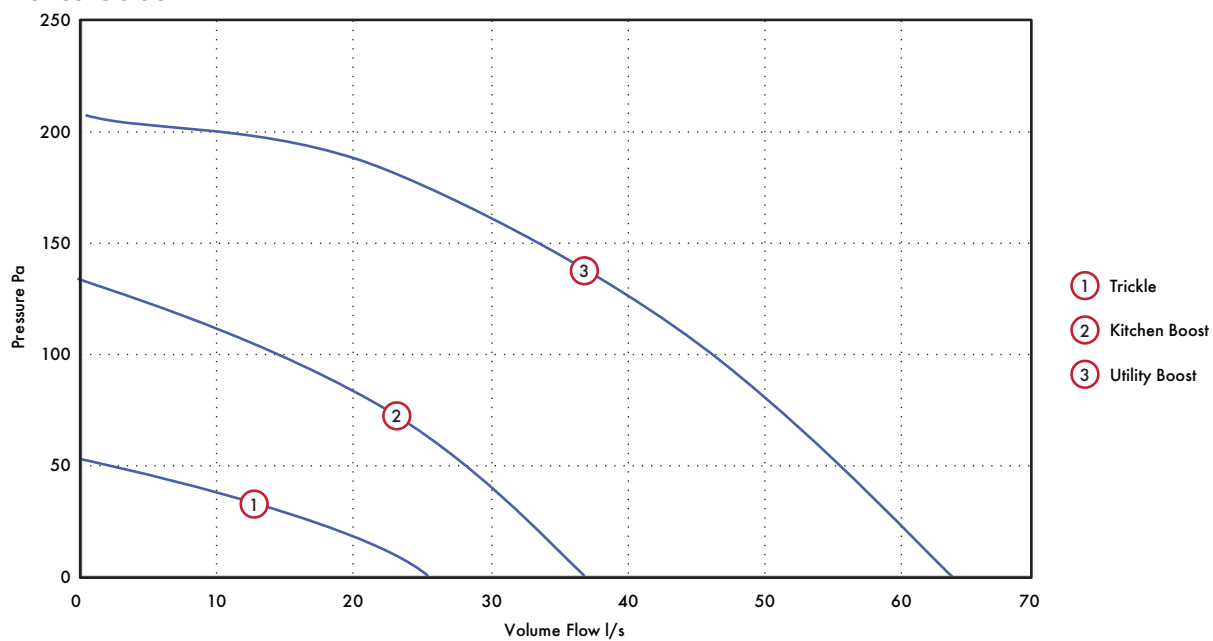

Performance @ 0 Pa

Model	High speed		Med speed		Low speed		Power (W)			Sound dB(A) @3m			SEC Class
	m <sup>3</sup> /h	l/s	m <sup>3</sup> /h	l/s	m <sup>3</sup> /h	l/s	Kitchen	Utility	Trickle	Kitchen	Utility	Trickle	
Centrif Duo Plus P/T	220	61	130	36	-	-	60	41	N/A	51.8	38	N/A	D
Centrif Duo Plus DP/HTP	220	61	130	36	90	25	60	41	9	51.8	38	21.5	D

# ACM 100-200

- Designed and manufactured in the UK
- Three speed motor
- Timer versions available
- Removable motor core
- Rotating motor chassis
- IP44 rated
- Aesthetically pleasing with wipe clean polymer casing
- Sound data from independent testing
- Running speed selected on installation



## Ducted Ventilation

Vent-Axia has designed a complete range of energy efficient Mixed Flow In-Line fans that are now quieter, offer two and half times the pressure of conventional axial fans and are dimensionally more compact making them ideal for many ducted applications.

The ACM Mixed Flow In-Line fan can operate in both horizontal and vertical positions.

### Motor

All motors have three speeds selectable on installation and are fitted with Standard Thermal Overload Protection (S.T.O.P.). Designed for ambient temperatures up to +50°C. All sizes with capacitor run motors. All sizes are Class II appliances. Supply voltage 220-240V/1/50Hz.

## Installation

These units have a separate footplate for simple location mounting and detachable spigots for simple connection to ducting. The motor body chassis rotates to provide connection in acute spaces. Cleaning the product is simple as all parts can be removed without removing the ducting.

## Controller

For optimum variable speed performance use a Vent-Axia 1.5 Amp electronic controller. Surface mounted providing variable speed control with an On/Off/sensor slider with indication light. There is an adjustable minimum speed setting. The controller has electrical connections for use with suitable external sensors. Cannot be used with timer models.

1.5 Amp Controller (Suitable for 100mm - 200mm models). Dimensions: 86 x 156 x 53mm (H x W x D).

### Stock Ref

**W300310**

For flush fitting, a metal wall box accessory is available.

### Stock Ref


**400144**

Hole for wall box: 80 x 150 x 150mm (H x W x D).

## Models

Model	Stock Ref
ACM100	<b>17104010D</b>
ACM100T	<b>17104020F</b>
ACM125	<b>17105010D</b>
ACM125T	<b>17105020C</b>
ACM150	<b>17106010C</b>
ACM150T	<b>17106020D</b>
ACM200	<b>17108010B</b>
ACM200T	<b>17108020C</b>



## Dimensions (mm)

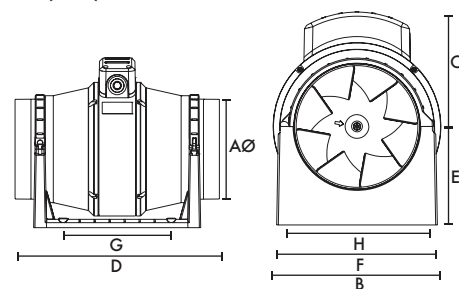

Size	100	125	150	200
AØ	97	122	147	199.5
B	178	178	200	223
C	124	124	138	146
D	298	259	350	300
E	96	96	118	130
F	168	168	192	195
G (fixing hole)	120	120	162	100
H (fixing hole)	153.5	153.5	178	180



## Performance Guide

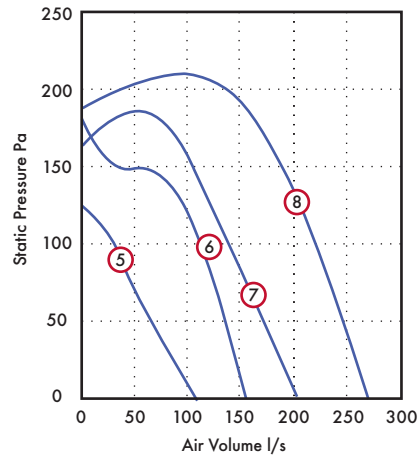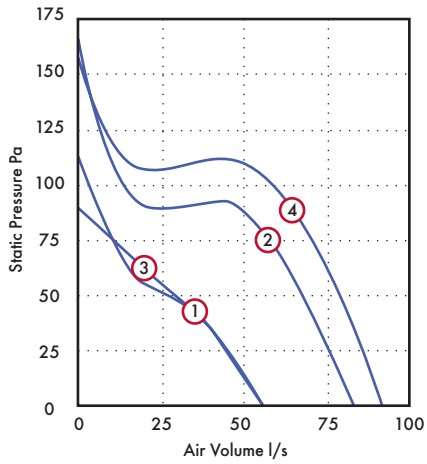

Dia.	Motor Phase	Speed	r.p.m	IP Rating	Curve Ref.	0	50	100	150	200	Motor kW	F.L.C Amps	dB(A) @ 3m
100	1	Low	1580	IP44	1	55	28	-	-	-	0.02	0.09	16
100	1	High	2200	IP44	2	85	69	33	-	-	0.02	0.1	22
125	1	Low	1450	IP44	3	55	30	-	-	-	0.02	0.1	17
125	1	High	2400	IP44	4	92	79	60	-	-	0.03	0.12	24
150	1	Low	1645	IP44	5	105	65	31	-	-	0.04	0.17	29
150	1	High	2350	IP44	6	155	135	112	46	-	0.05	0.21	36
200	1	Low	1845	IP44	7	204	170	138	103	-	0.08	0.48	26
200	1	High	2350	IP44	8	270	247	220	188	134	0.11	0.55	41

\*Medium speed is not shown.

## Sound Data

Dia.	Spectrum	63	125	250	500	1k	2k	4k	8k	dB(A) @ 3m
100	Breakout High	32	36	41	39	37	37	28	22	22
100	Breakout Low	30	31	34	36	28	29	23	22	16
100	Inlet High	38	42	57	56	54	46	38	30	37
100	Inlet Low	35	40	49	49	47	37	28	24	30
100	Outlet High	36	41	52	52	53	44	37	28	34
100	Outlet Low	38	41	45	46	45	36	28	24	27
125	Breakout High	32	33	38	41	41	40	33	23	24
125	Breakout Low	27	33	30	39	30	29	24	22	17
125	Inlet High	36	47	53	58	55	53	47	39	39
125	Inlet Low	38	42	45	48	45	41	35	26	29
125	Outlet High	36	47	51	54	55	50	46	37	37
125	Outlet Low	33	41	45	45	44	38	33	25	26
150	Breakout High	26	28	41	45	48	54	41	29	36
150	Breakout Low	21	29	45	49	43	44	32	22	29
150	Inlet High	40	49	59	63	59	63	55	47	46
150	Inlet Low	38	46	52	57	52	54	46	37	38
150	Outlet High	36	48	54	60	58	61	54	46	44
150	Outlet Low	33	45	49	54	54	52	45	36	37
200	Breakout High	38	53	47	47	56	60	44	33	41
200	Breakout Low	26	46	40	34	30	26	18	21	26
200	Inlet High	46	52	54	60	61	63	60	49	47
200	Inlet Low	38	37	40	41	39	35	24	23	22
200	Outlet High	63	68	69	73	70	69	62	54	54
200	Outlet Low	53	54	52	52	48	47	39	28	33

# Continuous Mechanical Extract Ventilation (formerly System 3)



Continuous Mechanical Extract Ventilation can be achieved using a single centralised extract unit such as the Sentinel Multivent ducted from 'wet' rooms (kitchen, bathroom, en-suite and WC) or by decentralised individual fans (dMEV) in the 'wet' rooms. The fans run continuously at near silent levels providing a simple and effective form of ventilation.

The Lo-Carbon dMEV unit meets the latest requirements of the Building Regulations Approved Document F 2021 for wholehouse system ventilation.

**Vent-Axia**





Lo-Carbon NBR dMEV C  
dMEV Unit

34 - 35

---



Lo-Carbon NBR dMEV  
dMEV Unit

36 - 37

---



Lo-Carbon MVDC-MS/MS-H Multivent  
MEV Unit

38 - 39

---



Lo-Carbon Sentinel Multivent/Plus  
MEV Unit

40 - 43

---




Lo-Carbon MVDC-MS-H Uniflex Multivent  
MEV Unit

44 - 45

---

# Lo-Carbon NBR dMEV C

- Continuously running 100mm and 125mm dMEV with sleek circular design
- Designed to comply with the latest Building Regulations Parts L1A and F 2021
- SAP PCDB listed with SFP's down to 0.08 W/l/s
- Near silent operation independently tested
- IPX5 rated, wall and ceiling mounted Zones 1, 2 and 3
- Low ceiling void - 56mm (100mm spigot) and 66mm (125mm spigot)
- Easy to commission, fully adjustable variable control platform
- Intelligent humidistat model option with proportional increase and timer
- Comfort control option
- 7- year warranty

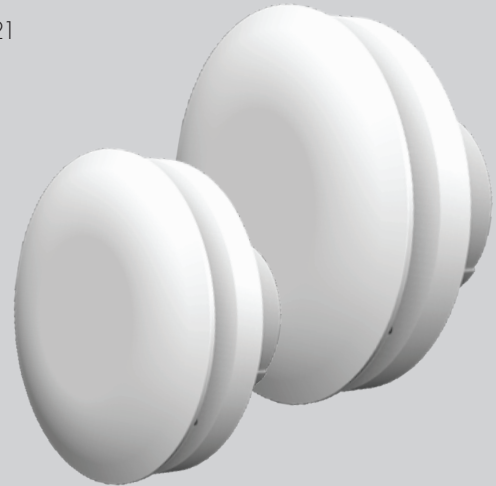

## Lo-Carbon NBR dMEV C

Increased whole ventilation rates, should not mean increased noise levels. The Vent-Axia Lo-Carbon NBR dMEV C fan, available in 100mm and 125mm, provides adequate ventilation whilst minimising noise.

The fan is designed in line with the Approved Document F 2021 Building Regulations, meeting the increased whole house ventilation rates.

Table 1.3 - Minimum whole dwelling ventilation rates determined by the numbers of bedrooms.

No. of bedrooms	2013 Edition	2021 Edition	Increase
1	13l/s	19l/s	46%
2	17l/s	25l/s	47%
3	21l/s	31l/s	47%
4	25l/s	37l/s	48%
5	43l/s	43l/s	48%

The minimum whole dwelling ventilation rate for the supply air should meet the higher of the two following result:

- A minimum rate of 0.3l/s per m<sup>2</sup> of internal floors area
- A minimum rate determined by the number of bedroom, as per Table 1.3

Nuisance tripping has also been minimised within the fan logic. The integral humidity sensor versions have functionality that allows for proportional speed increase up to 85% relative humidity (RH) before enabling Boost.

The Lo-Carbon NBR dMEV C is complete with IPX5 rating, allowing flexible installation within Zone 1, 2 and 3.

A back pressure detection system option is available, to Boost if the system pressure increase momentarily due to external wind conditions. A silent mixed flow impeller means the Lo-Carbon NBR dMEV C can meet the requirements of many domestic installations without the need to use a traditional centrifugal fan.


A brand new control platform also provides fully adjustable airflow, meaning wholehouse rates can be achieved easily using fewer fans.

## Comfort Control Option

Designed to offer a more relaxing environment to the homeowner, the Lo-Carbon NBR dMEV C features a delayed start. This patented comfort control option allows the homeowner to enjoy a quiet, peaceful bathroom for up to 20 minutes before the Boost activates. Furthermore, if the light switch turns On and Off within three minutes, the Boost will not activate. No more disturbing the family if the bathroom light is turned on during the night.

## Near Silent Operation

The fan has been designed to be as discreet as possible for homeowners, with independently tested sound levels as low as 7.4dB(A).

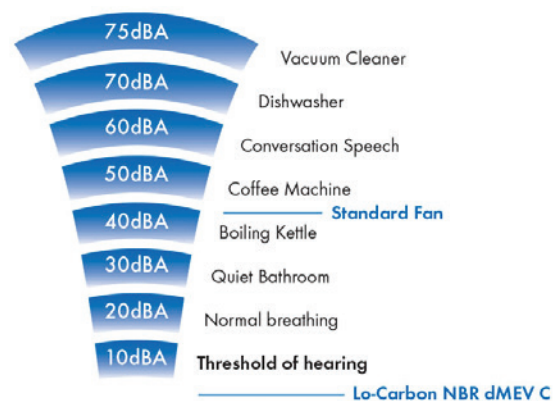



## Model

### Lo-Carbon NBR dMEV C

For kitchen, utility and bathroom/toilet applications, the continuous running dMEV C fan is available as standard or as a humidistat model which incorporates an ambient response humidistat. The fan will increase the extract rate if the humidity rises above the point set at installation. Both fans will have optional Comfort Control, which includes a timer function.

Variable speed setting

Model	Stock Ref
Lo-Carbon NBR dMEV C 100	498095
Lo-Carbon NBR dMEV C 100 HT	498096

Variable speed setting

Model	Stock Ref
Lo-Carbon NBR dMEV C 125	498097
Lo-Carbon NBR dMEV C 125 HT	498098

## Accessories

Model	
Stock Ref	
Wall Kit White 100mm	254102
Wall Kit Brown 100mm	254100
Wall Kit White 125mm	455226
Wall Kit Brown 125mm	497434
Wall Kit Terracotta 125mm	497432

## Consultant Specification

The de-centralised mechanical extract ventilation unit shall be the Lo-Carbon NBR dMEV C as manufactured by Vent-Axia, exact unit sizing and specification shall be in accordance with the particular specification.

The range should consist of IPX5 rated 100mm and 125mm sizes to meet the Building Regulations compliant design, extracting air from wet rooms (including kitchen and utility) via rigid, flexible ducting or through-wall applications with the fewest fans possible, supplied with a 7 - year warranty.

The 100mm Lo-Carbon NBR dMEV C should have variable speed settings of 5-26 l/s achieving a minimum noise level of 7.4dB(A) at 3 metres. The 125mm Lo-Carbon NBR dMEV C should have variable speed settings of 5-35 l/s achieving a minimum noise level of 8.5dB(A) at 3 metres. All sound pressure levels are quoted at hemispherical measurements. All units shall be and independently third-party tested at the Sound Research Laboratory (SRL), tested to BS EN 13141-6.

The unit shall comprise a single high efficiency EC/DC motor to deliver specific fan powers as low as 0.08 W/l/s, as measured in accordance with the SAP PCDB test method and listed on the PCDB database.


The controls for the Lo-Carbon NBR dMEV C unit shall provide fully adjustable, continuous whole house ventilation rates. The Boost speed shall be activated via an integral humidistat or via LS Input.

The fan shall be compatible with low ceiling voids and have a spigot length of 56mm (100mm) and 66mm (125mm).


The fan shall have the nuisance tripping prevention option called Comfort Control, which stops the fan from engaging Boost when the LS input is engaged for less than three minutes.

The unit shall be able to be commissioned as a continuous running fan according to the Building Regulations compliant design.

## Dimensions (mm)

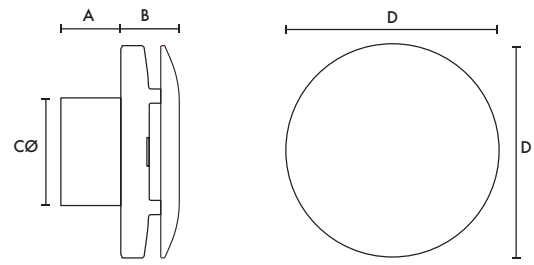


Model	A	B	CØ	D
100	56	54	99	195
125	66	57	120	228



- 1 Rear cable entry
- 2 Side cable entry (cut plastic side wall to access)
- 3 100% variable speed adjustment
- 4 Installation mode (SW1) Back pressure detection system (SW2)

## Performance Guide

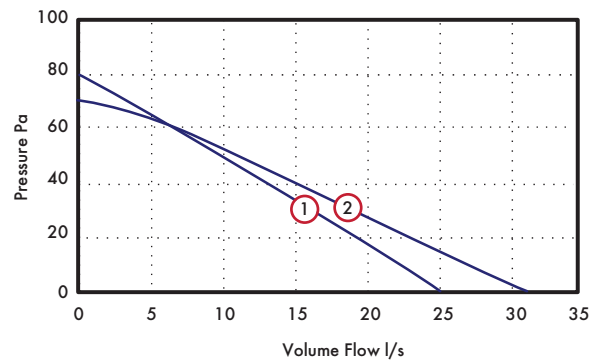

- 1 100mm dMEV C Max Speed
- 2 125mm dMEV C Max Speed

## Sound

Model	Speed	dB(A)
100	Min	7.4
	Max	34.3
125	Min	8.5
	Max	37.9

## SAP PCDB Performance 2021

Unit configuration	Location	100 Model	125 Model
In room (Rigid duct)	Kitchen (13l/s)	0.14	0.14
	Kitchen/wet room (8l/s)	0.11	0.12
Through wall	Kitchen (13l/s)	0.08	0.09
	Kitchen/wet room (8l/s)	0.08	0.10

# Lo-Carbon NBR dMEV

- Market leading efficiency
- Digital controls with display
- Fully adjustable trickle & boost airflow settings
- 100mm & 125mm model
- Recognised in SAP PCDB
- Constant volume
- Display showing airflow and system pressure
- Switched live connection for external switches/sensors
- IPX5 rated
- Multi-orientation grille
- NHBC Approved
- STAS Approved (Scotland)
- Airflow sensor models UKAS calibrated



## Lo-Carbon NBR dMEV

Continuous running, constant volume dMEV range with switched live (LS) and innovative digital display and harmonised control platform. Quiet running and with high pressure development, the dMEV is best in class.

The unique patented display provides the calibrated installed airflow and pressure meaning that there is no need to test the installation with an airflow measuring device.

The constant volume technology automatically adjusts the speed of the fan to ensure the desired airflow is delivered. A silent high pressure axial impeller means Lo-Carbon dMEV can meet the requirements of many domestic installations without the need to use a traditional centrifugal fan.

A brand new control platform also provides fully adjustable airflow in 1l/s increments, meaning wholehouse rates can be achieved easily using fewer fans than is currently possible with any other dMEV product on the market.

## Longer Duct Runs

A new 125mm dMEV fan is also available to further improve Dwelling Emission Rates (DER) by improving efficiency and lowering noise. The larger 125mm spigot also means there are almost no restrictions in terms of duct lengths and bends used in the system, when compared to a traditional 100mm axial fan. This means fewer fans are required to achieve wholehouse ventilation rates.

As can be seen below, an axial dMEV fan consumes a fraction of the energy of the equivalent centrifugal fan - drastically reducing DER.

Configuration	Location	Alternative Centrifugal Fan SFP	Vent-Axia dMEV 125mm SFP
In room	Kitchen	0.38	0.16
	Wet Room	0.29	0.20
Through Wall	Kitchen	0.36	0.12
	Wet Room	0.28	0.16

## Side View of Airflow Display

Be confident that the dMEV is delivering the right performance with our innovative digital display showing the airflow and system pressure of the installed product.



## Comfort Control Option

Designed to offer a more relaxing environment to the homeowner, the Lo-Carbon dMEV features a delayed start option. This patented comfort control option is selectable at installation and allows the homeowner to enjoy a quiet, peaceful bathroom for up to 20 minutes before the Boost activates. Furthermore, if the light switch turns On and Off within 3 minutes, the Boost will not activate. No more disturbing the family if the bathroom light is turned on during the night.

## Lo-Carbon NBR dMEV & dMEV HT

Continuous running dMEV available in two sizes. Humidity control models incorporate an adjustable (40% - 90%) ambient response humidistat. The fan will increase the extract rate if the humidity rises above the point set at installation. Variable speed options for trickle and boost, dependant on size for maximum control. Features a display prism, to allow users to see airflow being achieved without having to remove a grille.

Variable Speed Settings (5-30 l/s trickle, 6-35 l/s boost)

Model	Stock Ref
Lo-Carbon dMEV 100 (Switch Live)	475142A
Lo-Carbon dMEV 100 HT (Humidity Control)	473809A

Variable Speed Settings (9-30 l/s trickle, 10-35 l/s boost)

Model	Stock Ref
Lo-Carbon dMEV 125 (Switch Live)	494147
Lo-Carbon dMEV 125 HT (Humidity Control)	494148

## Accessories

Model	Stock Ref
Wall Kit White 100mm	254102
Wall Kit Brown 100mm	254100
Ceiling Kit 100mm	407928
Window Kit 100mm	407927
Decoration Frame 100mm	474041
Wall Kit White 125mm	455226
Conversion Kit 150mm	408680

## Consultant Specification

The de-centralised mechanical extract ventilation unit shall be the NBR DMEV as manufactured by Vent-Axia, exact unit sizing and specification shall be in accordance with the particular specification.

The range should consist of IPX5 rated 100mm and 125mm sizes to meet the Building Regulations compliant design, extracting air from wet rooms (including kitchen and utility) via rigid, flexible ducting or through-wall applications with the fewest fans possible, supplied with a 7 year warranty.

The 100mm DMEV should have variable speed settings of 5-30 l/s on trickle and 6-35 l/s on boost, achieving a minimum noise level of 13 dB(A) at 3 metres. The 125mm DMEV should have variable speed settings of 9-30 l/s on trickle and 10-35 l/s on boost, achieving a minimum noise level of 12.9 dB(A) at 3 metres. All units shall be and independently 3rd party tested at the Sound Research Laboratory (SRL), tested to BS EN 13141-6.

The unit shall comprise a single high efficiency EC/DC motor to deliver specific fan powers as low as 0.12 w/l/s, as measured in accordance with the SAP PCDB test method and listed on the PCDB database.


The controls for the DMEV unit shall provide fully adjustable, continuous trickle and boost speeds, with the airflow being controlled in 1 l/s increments. The boost speed shall be activated via a switch live input or integral humidistat.

The unit shall include an integral humidity sensor with ambient and rapid response capability, which increases fan speed in proportion to the level of humidity detected. The unit shall also automatically raise the humidity threshold set point as temperature decreases in order to prevent unnecessary boosting due to background humidity levels.

The unit shall be able to be commissioned as a continuous running or intermittent fan according to the Building Regulations compliant design. The fan will have an in-built spirit level for ease of installation.


Commissioning of the fan in accordance with the Building regulations shall be achieved without the use of an airflow measuring device. The fan shall be provided with a UKAS calibrated, constant volume function with the flow rates displayed on the unit without having to remove the cover via the display prism.

## Dimensions (mm)



Model	A	B	CØ	D
100	81	43	99	190
125	100	46	115	213

## Performance Guide

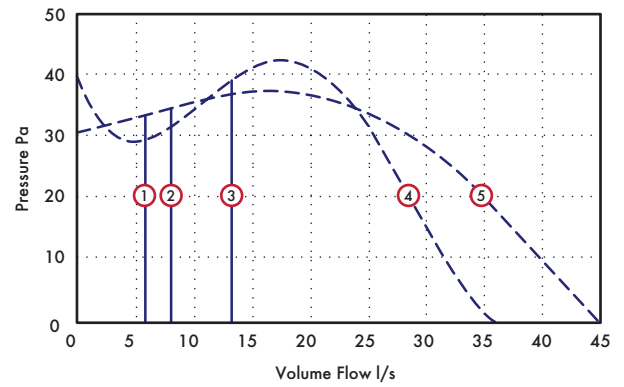

- ① 6l/s Constant Volume
- ② 8l/s Constant Volume
- ③ 13l/s Constant Volume
- ④ Maximum pressure available to deliver airflow - 100mm model
- ⑤ Maximum pressure available to deliver airflow - 125mm model

## Sound

100mm					125mm						
Flow l/s	Min	6	8	13	Max	Flow l/s	Min	9	13	15	Max
Pa	-	5	7	17	-	Pa	-	4	7	9	-
dB(A)	13	14	17	24	41	dB(A)	12	14	17	19	36

## SAP PCDB Performance

Unit Configuration	Location	100 Model	125 Model
In room (rigid duct)	Kitchen	0.17	0.16
	Wet room	0.17	0.20
In room (flex-duct)	Kitchen	0.16	0.15
	Wet room	0.16	0.20
Through wall	Kitchen	0.12	0.12
	Wet room	0.14	0.16

# Lo-Carbon MVDC-MS/MSH Multivent

- Recognised in SAP PCDB with best in class Specific Fan Power
- Reduces your carbon footprint
- Fitted with three 125mm diameter extract spigots allowing quick connection to ducts
- Complies with Building Regulations ADF
- Option of wall, ceiling and loft mounting
- Improved controllability
- Two Switched Live connections
- Fully variable normal, purge and boost speeds
- Ultra quiet
- Integral humidistat (H version)




With growing concerns about accurate ventilation of properties, the Lo-Carbon Multivent MVDC range offers the option of 'Close Control' both in the residential and the commercial sectors. With a DC motor the multi speed Lo-Carbon Multivent is one of the most efficient central extract units available.

The units have 3 fully variable speeds: normal, boost and purge. The digital display allows accurate setting of airflow, ensuring exactly the right ventilation rate. Accurate speed control helps minimise noise and energy consumption.

The Multivent H version incorporates a built-in humidity sensor to boost the unit when humidity reaches a certain threshold.

## Dimensions (mm)

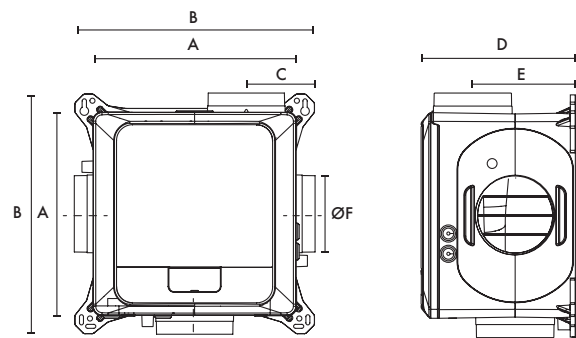

A	B	C	D	E	ØF	G	kg	No. Extract Spigots
330	391	111	248	165	125	-	4.1	3

## Models


Model	Stock Ref
MVDC-MS	437634C
MVDC-MSH	443298B

## SAP PCDB Test Results

Exhaust Terminal Configuration	Total Flow Rate (l/s)	SFP (W/l/s)
K + 1	21	0.15
K + 2	29	0.14
K + 3	37	0.16
K + 4	45	0.18
K + 5	53	0.21
K + 6	61	0.26

## Performance Guide

MVDC-MSH features an integral humidistat which triggers the unit to boost when humidity levels in the duct system exceed 70%.

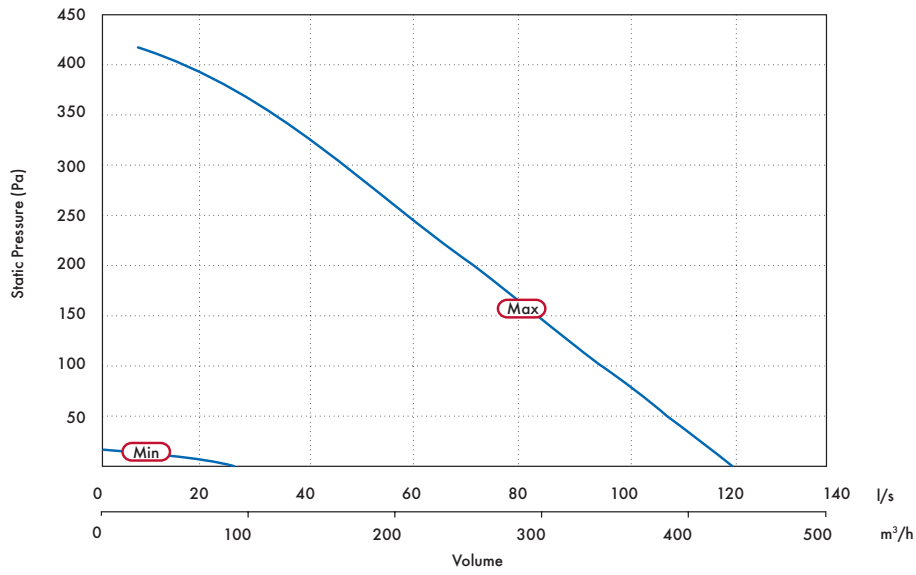

Min				Max				
Casing Breakout dB(A) @ 3m	Inlet Duct dB(A)	FID l/s	Power Watts	Casing Breakout dB(A) @ 3m	Inlet Duct dB(A)	FID l/s	Power Watts	SEC Class (inc. LDC)
13	18	24	2	37	40	118	44	B
13	18	24	2	37	40	118	44	B

## Sound Data

Speed	Test Mode	Octave Band (Hz) Sound Power Levels, dB								LwA	SpL @ 3m
		63	125	250	500	1k	2k	4k	8k		
20%	Extract	50.3	40.4	40.0	33.7	28.1	21.6	18.0	23.0	36.2	18.7
	Breakout	40.2	38.7	32.8	26.9	17.1	14.5	17.8	22.4	29.9	9.4
40%	Extract	58.4	52.9	52.4	46.2	41.5	30.4	20.8	23.1	48.2	30.7
	Breakout	42.7	44.7	45.3	33.0	24.3	19.7	17.9	22.4	37.5	17.0
60%	Extract	56.4	58.2	62.5	53.9	41.3	40.0	32.0	25.9	56.2	38.7
	Breakout	40.1	52.1	50.2	39.2	30.6	32.2	20.0	22.4	43.9	23.4
80%	Extract	60.1	63.9	67.2	63.8	48.4	46.2	41.6	35.0	63.1	45.6
	Breakout	33.6	60.1	47.4	49.6	36.1	32.7	24.2	22.7	49.2	28.7
100%	Extract	76.2	79.3	71.9	69.7	53.6	51.4	47.9	42.2	69.7	52.2
	Breakout	47.3	56.6	52.5	52.7	40.7	37.7	29.7	23.7	51.7	31.2



# Lo-Carbon Sentinel Multivent/Plus

- Reduces your carbon footprint
- Recognised in SAP PCDB
- Specific fan power as low as 0.16 W/l/s
- Suitable for use with external sensors and controllers
- Wireless control option for "X" models
- Complies with Building Regulations ADF and ADL
- Manufactured in the UK
- Integral adjustable overrun timer and delay on timer



Sentinel Multivent continuous mechanical extract ventilation, MEV is designed for the simultaneous ventilation of separate areas in the home or as a multipoint extraction system for a wide range of commercial applications. The units can be wall, ceiling or loft mounted. Where the ambient air has a high humidity content condensate drains are provided.

## In support of Sentinel Multivent, Vent-Axia offers:

- Practical advice on product selection and installation
- Guidance on solutions to meet legislation requirements
- Project management and site deliveries
- After sales support and maintenance information

## The need to improve efficiency

Sentinel Multivent has been designed to meet the exacting demands of developers, installers and users offering advanced control options and easier installation and commissioning.

- Demand Control - enables precise ventilation rate, is set in 1% increments based on property size
- Comfort mode allows homeowners to control when the unit runs and for how long to avoid disturbance
- Integral digital display allows the installer to select appropriate low, normal, boost and purge speeds to meet demand
- Manual and automatic control options
- Integral adjustable overrun timer and delay on timer
- Switched live and SELV connections
- Optional Wireless Control on "X" units
- Energy efficient EC/DC motors - 1/3 less energy lost to heat than a conventional AC motor
- Low Specific Fan Power (SFP) making it one of the most efficient products on the market

## Legislation

- Meets Building Regulations Approved Document F (System 3)
- Recognised in SAP PCDB up to kitchen + 6 wet rooms
- Meets carbon footprint reduction targets
- The need for better health: Removal of pollutants such as moisture, carbon dioxide and external fumes are all important factors

in maintaining indoor air quality, helping to create a healthier living environment

- The integral humidity sensor (Sentinel Multivent H) increases fan speed in proportion to relative humidity levels, saving energy and reducing noise
- The sensor also reacts to small but rapid increases in humidity, even if the normal trigger threshold is not reached. This unique feature ensures adequate ventilation, even for the smallest wet room
- Night time relative humidity increment setback feature suppresses nuisance tripping as humidity gradually increases with falling temperature

## SAP PCDB

In order to make the right choice, developers and contractors should refer to Building Regulations ADL1a, SAP 2012 and SAP PCDB.

SAP PCDB was launched in June 2006 to reward innovative ventilation manufacturers by testing and listing energy efficient products that assist in helping developers meet their Target Emission Rates (TER).

SAP is the underpinning methodology behind the Energy Performance Certificates and is used to demonstrate compliance with Building Regulations for Dwellings - Approved Document L (England and Wales), Section 6 (Scotland) and Approved Document F (Northern Ireland). SAP PCDB specifically relates to wholehouse ventilation systems and lists a number of Vent-Axia Mechanical Ventilation solutions which offer an improved SAP rating over and above the default for these product types.

## SEC Class

Model	SEC Class (inc. LDC)
Sentinel Multivent/Plus	B

## SAP PCDB Test Results (Sentinel Multivent and Multivent Plus)

Exhaust Terminal Configuration	Total Flow Rate (l/s)	SFP (W/l/s)
K+1	21	0.17
K+2	29	0.16
K+3	37	0.17
K+4	45	0.18
K+5	53	0.21
K+6	61	0.24

To assist developers and contractors Vent-Axia can provide detailed scheme designs together with installation guidance and training.

## Your Carbon Footprint

Carbon footprint is a measure of the amount of carbon dioxide (CO<sub>2</sub>) emitted through the burning of fossil fuels. From a residential and commercial building perspective, it is the amount of carbon generated when you consume a kiloWatt (kW) of electricity. Reducing a building's carbon footprint will ultimately reduce electricity bills and save money for every individual household or business. It will also help meet the UK target for the reduction of emissions, as well as allowing you to help the environment.

## Model


	Stock Ref
Sentinel Multivent H	445655B
Sentinel Multivent HX	495360
Sentinel Multivent HX CO <sub>2</sub>	495361
Sentinel Multivent Plus H	407849A
Sentinel Multivent Plus HX	495362
Sentinel Multivent Plus HX CO <sub>2</sub>	495363

## Accessories




	Stock Ref
Anti Vibration Mounts (Pack of 4)	68MP033G

## Dimensions (mm)

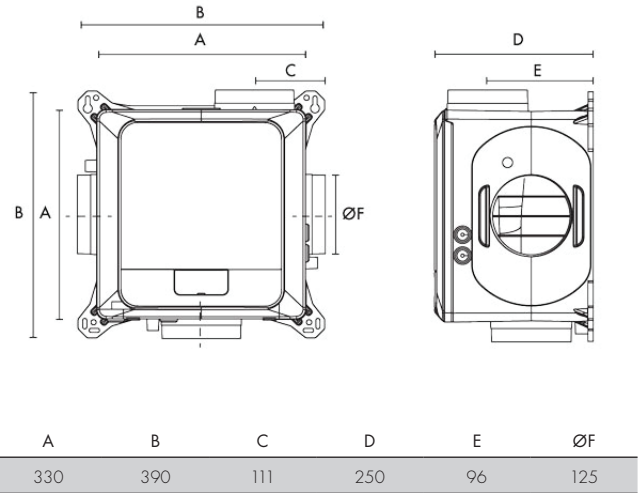

## Performance Guide

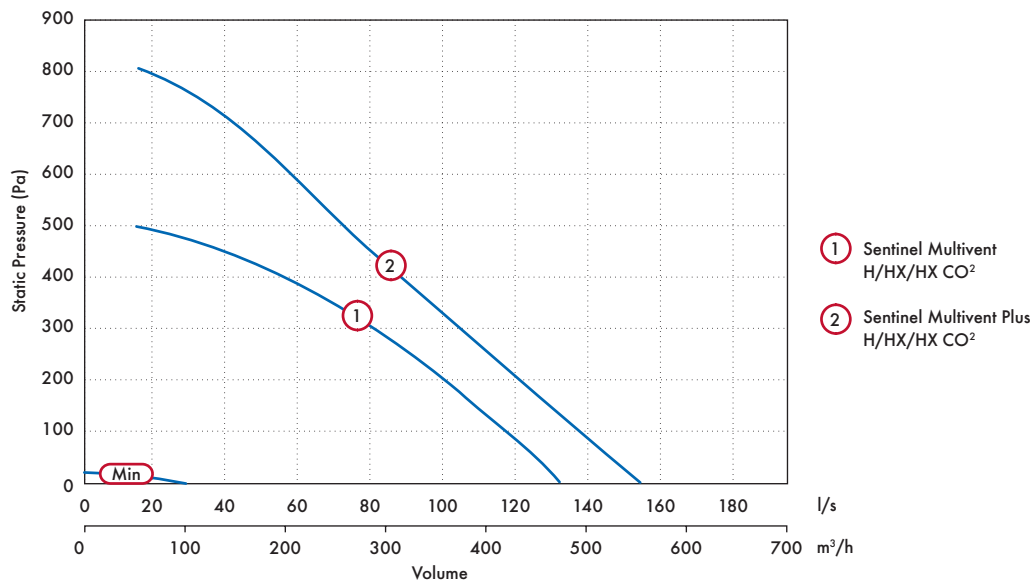

Stock Ref	Model	Curve Ref	FID (l/s)	Power Watts	IP Rating
445655 / 495360 / 495361	Multivent	1 (max)	128	52	IPX2
407849 / 495362 / 495363	Multivent Plus	2 (max)	159	85	IPX2

## Sound Data

Model	Speed	Test Mode	Octave Band (Hz) Sound Power Levels, dB								LwA	SpL @ 3m
			63	125	250	500	1k	2k	4k	8k		
Sentinel Multivent	20%	Extract	32.5	50.7	41.9	37.5	28.4	19.4	17.8	22.3	38.0	20.5
		Breakout	28.7	37.6	32.5	29.6	20.9	14.8	17.9	22.7	30.5	10.0
	40%	Extract	33.4	51.3	52.7	48.2	41.8	38.0	24.0	22.8	49.2	31.7
		Breakout	34.1	52.7	42.6	38.9	30.3	24.8	18.5	22.6	42.0	21.5
	60%	Extract	38.2	53.3	70.5	58.9	49.5	46.0	35.8	27.2	61.5	44.0
		Breakout	44.8	48.4	54.4	45.4	37.6	32.6	23.6	22.8	47.4	26.9
	80%	Extract	41.7	55.5	70.3	60.6	55.3	52.7	43.5	35.9	64.2	46.7
		Breakout	41.8	51.6	61.9	50.9	43.5	39.5	30.3	23.9	55.1	34.6
	100%	Extract	46.3	58.1	75.1	66.7	60.1	58.0	49.1	43.3	70.2	52.7
		Breakout	46.0	54.0	63.2	55.3	47.8	44.6	35.7	27.0	58.3	37.8

Tested according to BS EN 13141-6:2010. Breakout quoted spherical. Extract quoted hemispherical.

Model	Speed	Test Mode	Octave Band (Hz) Sound Power Levels, dB								LwA	SpL @ 3m
			63	125	250	500	1k	2k	4k	8k		
Sentinel Multivent Plus	20%	Extract	30.3	49.6	43.5	40.4	33.2	25.2	18.2	22.4	40.3	22.8
		Breakout	30.5	39.8	35.3	31.3	22.3	16.5	17.9	22.8	32.5	12.0
	40%	Extract	43.5	54.7	60.8	54.5	46.2	42.5	31.0	24.5	54.5	37.0
		Breakout	47.0	49.3	54.0	42.1	33.9	29.1	20.6	22.6	45.7	25.2
	60%	Extract	40.8	55.2	67.0	61.0	54.0	50.9	41.3	33.3	62.1	44.6
		Breakout	40.1	51.2	58.7	48.2	41.3	37.4	28.4	23.5	52.0	31.5
	80%	Extract	45.5	57.6	79.1	66.3	59.7	57.5	48.5	42.7	73.2	55.7
		Breakout	45.6	54.6	64.5	54.7	46.5	44.2	35.2	26.5	59.1	38.6
	100%	Extract	52.7	61.8	71.6	81.8	66.1	62.7	54.0	49.2	77.8	60.3
		Breakout	56.0	56.6	61.2	63.1	51.3	49.0	40.4	31.4	60.9	40.4

Tested according to BS EN 13141-6:2010. Breakout quoted spherical. Extract quoted hemispherical.

## Sentinel-X Controllers



### Internal Temperature and Humidity - Wireless - Battery

Room mounted humidity and temperature sensor for wired or wireless communication with a compatible system. Using an in-built RF 868 MHz (Wireless radio frequency), or RS485 (Wired connection) communication method whilst being powered by batteries.

- Dimensions (HxWxD) (mm) 60 x 60 x 22
- 2 x AAA Batteries included
- Temperature range 0~60°C
- Relative humidity range 0-90% RH
- Wireless range 20m closed/100m open
- RF 868MHz Wireless or RS485 Wired communication
- Status LED indicator for pairing, health check and fault conditions
- Mounted using provided back plate

Stock Ref  
**496431**



### 4 Speed Switch with Temperature and Humidity - Wireless - Battery & 240V

Room mounted Speed Switch for wireless communication with a compatible system. Using an in-built RF 868 MHz (Wireless radio frequency) communication. Battery and 240V model options.

- Dimensions (HxWxD) (mm) 90 x 90 x 17
- 2 x AAA Batteries (Battery Model) / Power supply 240V (240V Model)
- Temperature range 0~60°C
- Relative humidity range 0-90% RH
- Wireless range 20m closed/100m open
- RF 868MHz Wireless
- Mounted using provided back plate or compatible with a standard single gang or surface mounted pattress box
- Status LED indicator for pairing, health check and fault conditions

Model	Stock Ref
White (Battery)	<b>496437</b>
Black (Battery)	<b>497689</b>
White (240V)	<b>496620</b>
Black (240V)	<b>497693</b>



### Internal Temperature and Humidity - Wireless - 240V

Room mounted humidity and temperature sensor for wired or wireless communication with a compatible system. Using an in-built RF 868 MHz (Wireless radio frequency), or RS485 (Wired connection) communication method whilst being powered by a local 240V supply.

- Dimensions (HxWxD) (mm) 90 x 90 x 17
- Power supply 240V
- Temperature range 0~60°C
- Relative humidity range 0-90% RH
- Wireless range 20m closed/100m open
- RF 868MHz Wireless or RS485 Wired communication
- Compatible with standard single gang or surface mounted pattress box
- Status LED indicator for pairing, health check, faults & air quality traffic light index

Stock Ref  
**496429**



### CO<sub>2</sub>, Temperature and Humidity - Wireless - 240V

Room mounted CO<sub>2</sub> sensor for wired or wireless communication with a compatible system. Using an in-built RF 868 MHz (Wireless radio frequency), or RS485 (Wired connection) communication method whilst being powered by a local 240V supply.

- Dimensions (HxWxD) (mm) 90 x 90 x 17
- Power supply 240V
- Temperature range 0~60°C
- Relative humidity range 0-90% RH
- CO<sub>2</sub> Range 0-2000 PPM
- Wireless range 20m closed/100m open
- RF 868MHz Wireless or RS485 Wired communication
- Compatible with standard single gang or surface mounted pattress box
- Status LED indicator for pairing, health check, faults & air quality traffic light index

Stock Ref  
**496433**



### PIR Sensor - Wireless - 240V

Room mounted PIR sensor for wired or wireless communication with a compatible system. Using an in-built RF 868 MHz (Wireless radio frequency), or RS485 (Wired connection) communication method whilst being powered by a local 240V supply. Room mounted presence detector for min/max or on/off control. Wall or ceiling mounting.

- Dimensions (HxWxD) (mm) 90 x 90 x 17
- Power supply 240V
- 5-25min run on timer
- PIR Range 3m
- Compatible with standard single gang or surface mounted pattress box
- Wireless range 20m closed/100m open
- RF 868MHz Wireless or RS485 Wired communication

Stock Ref  
**496438**

# Lo-Carbon MVDC-MSH Uniflex Multivent

- Recognised in SAP PCDB with best in class Specific Fan Power
- Reduces your carbon footprint
- Fitted with nine 90mm diameter extract spigots allowing quick connection to ducts
- Complies with Building Regulations ADF
- Option of wall, ceiling and loft mounting
- Improved controllability
- Two Switched Live connections
- Fully variable normal, purge and boost speeds
- Ultra quiet
- Integral humidistat




With growing concerns about accurate ventilation of properties, the Lo-Carbon Multivent MVDC range offers the option of 'Close Control' both in the residential and the commercial sectors. With a DC motor the multi speed Lo-Carbon Multivent is one of the most efficient central extract units available.

The units have 3 fully variable speeds: normal, boost and purge. The digital display allows accurate setting of airflow, ensuring exactly the right ventilation rate. Accurate speed control helps minimise noise and energy consumption.

The Multivent H version incorporates a built-in humidity sensor to boost the unit when humidity reaches a certain threshold.

The new Uniflexplus+ Semi-Rigid ducting range sets the standard for easy to install, low profile ducting solutions. The system gives all of the flexibility that semi-rigid ducting provides - without taking up vital space. With minimal components, the system is uncomplicated to ensure a hassle-free, speedy install.

Dimensions (mm)

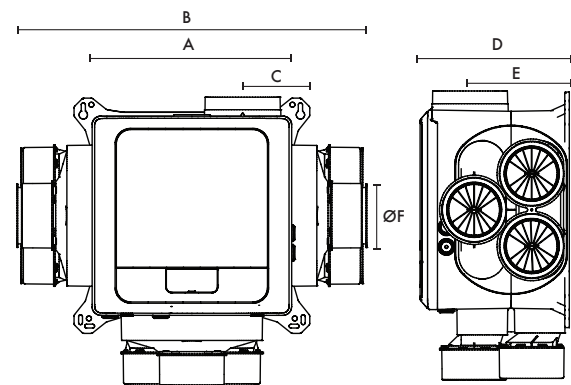

A	B	C	D	E	ØF	G	kg	No. Extract Spigots
330	567	111	248	165	90	479	7	9

## Models

Model	Stock Ref
MVDC-MSH Uniflex	498502


## SAP PCDB Test Results

Exhaust Terminal	Total	
Configuration	Flow Rate (l/s)	SFP (W/l/s)
K + 1	21	0.15
K + 2	29	0.14
K + 3	37	0.16
K + 4	45	0.18
K + 5	53	0.21
K + 6	61	0.26



## Performance Guide

MVDC-MSH features an integral humidistat which triggers the unit to boost when humidity levels in the duct system exceed 70%.

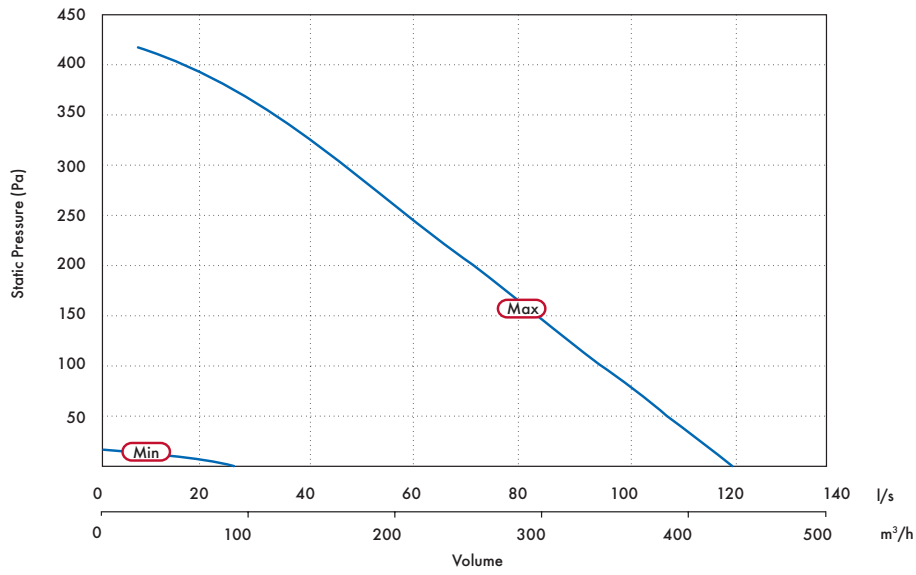

(Min)				(Max)				
Casing Breakout dB(A) @ 3m	Inlet Duct dB(A)	FID l/s	Power Watts	Casing Breakout dB(A) @ 3m	Inlet Duct dB(A)	FID l/s	Power Watts	SEC Class (inc. LDC)
13	18	24	2	37	40	118	44	B

## Sound Data

Speed	Test Mode	Octave Band (Hz) Sound Power Levels, dB								LwA	SpL @ 3m
		63	125	250	500	1k	2k	4k	8k		
20%	Extract	50.3	40.4	40.0	33.7	28.1	21.6	18.0	23.0	36.2	18.7
	Breakout	40.2	38.7	32.8	26.9	17.1	14.5	17.8	22.4	29.9	9.4
40%	Extract	58.4	52.9	52.4	46.2	41.5	30.4	20.8	23.1	48.2	30.7
	Breakout	42.7	44.7	45.3	33.0	24.3	19.7	17.9	22.4	37.5	17.0
60%	Extract	56.4	58.2	62.5	53.9	41.3	40.0	32.0	25.9	56.2	38.7
	Breakout	40.1	52.1	50.2	39.2	30.6	32.2	20.0	22.4	43.9	23.4
80%	Extract	60.1	63.9	67.2	63.8	48.4	46.2	41.6	35.0	63.1	45.6
	Breakout	33.6	60.1	47.4	49.6	36.1	32.7	24.2	22.7	49.2	28.7
100%	Extract	76.2	79.3	71.9	69.7	53.6	51.4	47.9	42.2	69.7	52.2
	Breakout	47.3	56.6	52.5	52.7	40.7	37.7	29.7	23.7	51.7	31.2

# Continuous Mechanical Ventilation with Heat Recovery (formerly System 4)
















Vent-Axia offers a complete range of Mechanical Ventilation with Heat Recovery (MVHR) units for residential and commercial applications, including many that are recognised in the SAP Product Characteristics Database.

## Lo-Carbon Sentinel Econiq

The first of our new generation of MVHR systems incorporating a range of unique features. Offering units with wifi and App control options along with integrated digital controls for easy installation the range is designed with developers, specifiers and installers in mind. With over 93% efficiency and low specific fan powers down to 0.39 W/l/s; designers will see a reduction in their dwelling emission rate.

**Vent-Axia**



	Lo-Carbon Sentinel Kinetic® Range Overview	48 - 51
	Lo-Carbon Sentinel Econiq MVHR Unit	52 - 59
	Lo-Carbon Sentinel Econiq Passivhaus Certified MVHR Unit	60 - 67
	Lo-Carbon Sentinel Kinetic® BH MVHR Unit	68 - 71
	Lo-Carbon Sentinel Kinetic® FH MVHR Unit	72 - 75
	Lo-Carbon Sentinel Kinetic® Plus MVHR Unit	76 - 79
	Lo-Carbon Sentinel Kinetic® High Flow MVHR Unit	80 - 83
	Lo-Carbon Sentinel Kinetic® Cooker Hood SELV MVHR Unit	84 - 87
	Lo-Carbon Sentinel Kinetic® Horizontal MVHR Unit	88 - 93
	Pull-out System Hood SELV	94
	HR100R/RS Horizontal MVHR Unit	95 - 96
	Integra Horizontal MVHR Unit	97 - 98
	Integra Plus EC Horizontal MVHR Unit	99 - 100

# Lo-Carbon Sentinel MVHR Range Overview

- Manufactured in the UK
- Building Regulations ADF and ADL compliant
- Recognised in SAP PCDB
- Specific Fan Power down to 0.4 W/l/s
- Up to 93% heat recovery
- Fully automatic Summer bypass
- Horizontal and/or vertical duct outlets
- Integrated digital controller for simple and accurate commissioning
- Lightweight for easy installation
- External condensate connection
- Plug and play controls; Humidistat
- Acoustic Enclosure option for reduced breakout noise
- Acoustic Top Box option for reduced in-duct noise



## The Sentinel Kinetic Range Incorporates:

- A wholehouse heat recovery system with up to 94% energy efficiency
- An easily accessible heat recovery cell protected by two removable ISO 45% Coarse (G3) filters
- Two Lo-Carbon energy saving EC/DC fans which ensure long life (typically over double the life of AC motors) and lowest possible energy use
- Fully insulated construction with built-in condensation drain
- Specifically designed for new build constructions with a high level of insulation

The Lo-Carbon Sentinel Kinetic meets the latest requirements of the Building Regulations ADF and ADL for wholehouse system ventilation: Continuous mechanical supply and extract with heat recovery. The Lo-Carbon Sentinel Kinetic models have 3 fully adjustable speeds and a purge setting (maximum flow). Provided with the unit is a digital controller that can be used to preset the speeds to any required airflow within the performance range.

## Integral Humidity Sensor

The integral humidity sensor (models with H suffix) increases speed in proportion to relative humidity levels, saving energy and reducing noise. The sensor also reacts to small but rapid increases in humidity, even if the normal trigger threshold is not reached. This unique feature ensures adequate ventilation, even for the smallest wet room. The night time relative humidity setback feature suppresses nuisance tripping as humidity gradually increases with falling temperature.

## Acoustic Solution

For scenarios where noise is a critical issue, The Sentinel Kinetic Acoustic Solution is also available for all Sentinel Kinetic units. An Acoustic Enclosure will reduce breakout noise and the Acoustic Top Box will reduce in-duct noise at key frequencies. The acoustic solution sound data for each product can be found on the relevant product page.



## Filtration

A new ISO filtration standard has come into force. The test method has changed so direct comparisons between EN779 2012 and ISO 16890 cannot be drawn. Below is a guide to the filter efficiencies:

ISO 16890	EN779
45% Coarse	G3
65% Coarse	G4
ePM10 50%	M5
ePM2.5 70%	F7

For sensors see Accessories & Controllers section.

## Sentinel Control

The Sentinel controller is the most advanced system available, providing Demand Control Ventilation (DCV), minimising energy consumption and noise levels, and optimising ventilation performance. Sentinel controlled units may be set to operate fully automatically or with varying levels of manual intervention.

## Building Management System (BMS) Options

There are two levels of BMS available: Basic Output and full Electronic BMS.

Basic Output provides a 5 volt output from the LED terminals on the controller. This output occurs whenever a message appears in the digital display, for example; 'Check Filters' or a fault code. The output can also be converted to volt-free with the addition of an optional Opto-Coupler.

Electronic BMS: A full range of two-way digital signals are available through the RJ11 connector on the control board. The BMS system provider will translate this signal to extract the desired data. Contact Vent-Axia to discuss your specific requirements.

## LED Alarm

MVHR units are often installed in lofts or other locations where they are difficult to monitor. The optional remote LED alarm illuminates when any message is visible in the MVHR unit display panel. The LED alarm can be installed in a convenient location within the dwelling allowing end users to see that the unit requires attention.



## Control Inputs

Five volt-free pairs of switch terminals for sensor inputs allow boosting from a full range of Vent-Axia controllers – humidistats, PIR, timers.

Two terminals with 0-24V outputs allow 0V to 10V proportional control by sophisticated controllers such as CO<sub>2</sub> sensors and proportional humidistats.

Switched-live for boosting via light switches (220-240V AC) or manual Normal/Boost switches. This connection has the advantage of Delay-On and Delay-Off facility. Delay-On enables you to prevent the Boost airflow between 0 and 10 minutes, after a light switch has been activated. Delay-Off allows the Boost airflow to continue after a light switch is turned off to ensure effective clearance of humidity. This timer is adjustable between 0 and 25 minutes.

The units can be boosted incrementally via the on-board controller or the Wired Remote Controller: One press = 30 minutes, two presses = 60 minutes, three presses = continuous.

---

## Frost Protection

In order to prevent frost forming inside the unit in winter conditions, the Kinetic range employs a sophisticated frost protection strategy that modifies the airflows ensuring heat recovery continues down to -20°C. Below this temperature, the units will operate as 'extract only' fans. If balanced ventilation is required at low temperatures, a duct pre-heater should be used.

---

## Optional Controls

Model	Stock Ref
LED Alarm with 15 metre cable	448356
Wired Remote Controller with 15 metre cable	443283

---

## Purge Options

The unit can be set to maximum flow (100%) by pressing and holding the Boost button on the unit itself or optional wired controller for 5 seconds. Purge will continue for two hours unless cancelled by pressing the Boost button again.



In addition, the Acoustic Purge Fan can be used in conjunction with a Sentinel Kinetic MVHR unit or independently via a separate switched live connection or 0-10V external sensor input.

Model	Stock ref
Acoustic Purge Fan	477988
Acoustic Purge Fan XL	479829

---

## Summer Bypass

An internal damper operates when the external temperature is below the internal temperature, and the internal temperature is too high.

The bypass opens and allows the cooler outside air to help cool the dwelling.

Normal mode: Fans run on Normal speed with bypass open until the internal dwelling temperature falls below the set 'Indoor' (maximum desired) temperature.

Evening Purge mode: The fans run on Boost speed until the internal temperature falls below the set 'Indoor' temperature. If, after five hours the internal temperature is still above the set 'Indoor' temperature, the unit will switch down to normal speed for the remainder of the 'bypass open' period.

Nighttime Purge mode: As Evening Purge, except that the unit will continue on Boost speed until the internal air temperature reaches the 'Outdoor' temperature set point (Default 14°C). This mode gives pre-cooling of the dwelling for the following day.

In Evening and Night Time Purge modes, the user can turn off the boost function by pressing the Boost button.

A Summer Bypass can make a contribution to reducing internal temperatures but is not a substitute for appropriate design and construction.

---

## System Cooker Hood Range

System canopy hoods are a motorless hood with extract being provided by the MVHR unit. When the Boost button on the canopy is activated, the MVHR unit goes to boost setting and the summer bypass opens preventing cooking by-products entering the heat exchanger cell. SELV hoods allow the distance between the hood and an electric hob to be reduced from 650mm to 550mm.



---

Model	Stock ref
White	407509
Aluminium	407206
White SELV	474790
Aluminium SELV	474791

---








# Sentinel Range Overview



Model Ranges	Lo-Carbon Sentinel Econiq Passivhaus			Lo-Carbon Sentinel Econiq			Lo-Carbon Sentinel Kinetic BH
Models	SCP	MCP	ICP	S	M	L	BH
Spigot Size	125	200	200	125	200	200	125
Dimensions (mm) HxWxD	823x660x443	931x728x608	931x728x608	823x660x443	931x728x608	931x728x608	640x550x285
Max Airflow	97 @ 150	125 @ 150	167 @ 150	97 @ 150	125 @ 150	167 @ 150	68 @ 100Pa
Standard Filters	G4 (extract) & F7 (supply)	G4 (extract) & F7 (supply)	G4 (extract) & F7 (supply)	G4	G4	G4	G3
Constant Volume	✓	✓	✓				
Sentinel-X Compatibility	✓	✓	✓	✓	✓	✓	
Passivhaus Certified	✓	✓	✓				
Internal Pre-Heater	✓	✓	✓				
App Connectivity	✓	✓	✓	✓	✓	✓	
Acoustic Enclosure	○*	○*	○*	○			○
Acoustic Top Box	○*	○*	○*	○			○
Auto Summer Bypass	✓	✓	✓	✓	✓	✓	✓
Easy Access Filters	✓	✓	✓	✓	✓	✓	✓
Integral Cooker Hood							
Built-In Humidistat	✓	✓	✓	✓	✓	✓	✓
Kitchen Cupboard Installation							✓
Frost Protection	✓	✓	✓	✓	✓	✓	✓
Delay-On	✓	✓	✓	✓	✓	✓	✓
Wired Remote Control	○	○	○	○	○	○	○
Wireless Boost	○	○	○	○	○	○	
Clean Filter Indicator (Time)	✓	✓	✓	✓	✓	✓	✓
Fault Code Indicator	✓	✓	✓	✓	✓	✓	✓
Volt Free Contact	✓	✓	✓	✓	✓	✓	✓
0V - 10V Proportional Control	✓	✓	✓	✓	✓	✓	✓
BMS Input/Output	✓	✓	✓	✓	✓	✓	✓ <sup>1</sup>
Lightweight				✓			✓
External Condensate	✓	✓	✓	✓	✓	✓	✓
Horizontal Duct Option	✓**	✓**	✓**		✓	✓	✓
Horizontal (Slab) Installation							
Left/Right Orientation	✓	✓	✓	✓	✓	✓	✓
PIN Number Lock	✓	✓	✓	✓	✓	✓	✓
Running Time Indicator	✓	✓	✓	✓	✓	✓	✓
Enthalpy Heater Exchanger	○	○	○	○	○	○	○
Mounting Options	 Wall Floor			 Wall Floor			 Wall Surface

○ - Denote Optional, 1- Seek technical advice from Vent-Axia.



Model Ranges	Lo-Carbon Sentinel Kinetic FH	Lo-Carbon Sentinel Kinetic Plus	Lo-Carbon Sentinel Kinetic High Flow	Lo-Carbon Sentinel Kinetic Cooker Hood SELV	Lo-Carbon Sentinel Kinetic Horizontal		
Models	FH	Plus	High Flow	CH	200ZPH	300ZH	200ZH/ZMH
Spigot Size	125	150	180	125	204x60	150	125/204x60
Dimensions (mm) HxWxD	555x640x350	785x722x550	785x722x550	590x710x316	575x200x1000	720x301x985	570x200x895
Max Airflow	79 @ 100Pa	117 @ 100Pa	185 @ 100Pa	68 @ 100	37 @ 100Pa	81 @ 100Pa	50 @ 100Pa
Standard Filters	G3	G3	G3	G3	G3	G3	G3
Constant Volume							
Sentinel-X Compatibility							
Passivhaus Certified							
Internal Pre-Heater							
App Connectivity							
Acoustic Enclosure	○	○	○				
Acoustic Top Box	○	○	○				
Auto Summer Bypass	✓	✓	✓	✓	✓	✓	✓
Easy Access Filters	✓	✓	✓	✓	✓	✓	✓
Integral Cooker Hood				✓			
Built-In Humidistat	✓	✓	✓	✓			
Kitchen Cupboard Installation				✓			
Frost Protection	✓	✓	✓	✓	✓	✓	✓
Delay-On	✓	✓	✓	✓	✓	✓	✓
Wired Remote Control	○	○	○	○	○	○	○
Wireless Boost							
Clean Filter Indicator (Time)	✓	✓	✓	✓	✓	✓	✓
Fault Code Indicator	✓	✓	✓	✓	✓	✓	✓
Volt Free Contact	✓	✓	✓	✓	✓	✓	✓
0V - 10V Proportional Control	✓	✓	✓	✓	✓	✓	✓
BMS Input/Output	✓1	✓1	✓1	✓1	✓1	✓1	✓1
Lightweight	✓	✓	✓				
External Condensate	✓	✓	✓	✓	✓	✓	✓
Horizontal Duct Option	✓	✓	✓	✓	✓	✓	✓
Horizontal (Slab) Installation					✓	✓	✓
Left/Right Orientation	✓	✓	✓	✓			
PIN Number Lock	✓	✓	✓	✓	✓	✓	✓
Running Time Indicator	✓	✓	✓	✓	✓	✓	✓
Enthalpy Heater Exchanger	○	○	○				
Mounting Options	 Wall Surface		 Wall Surface	 Wall	 Slab		

○ - Denote Optional, 1- Seek technical advice from Vent-Axia.

# Lo-Carbon Sentinel Econiq

- Best in class SFP's and thermal efficiencies up to 93%
- Approved Document F aligned commissioning wizard
- New Sentinel-X wireless control platform
- Intelligent smart app control as standard
- Horizontal duct option for space-saving installations (M & L only)
- ISO ePM10 (M5) and ePM2.5 (F7) filtration options
- Sound levels as low as 15.5 dB(A) breakout - independently tested and verified by SRL
- Left/right handing via controls
- Developed and manufactured in the UK
- Acoustic enclosure and top box options (S only)



The Lo-Carbon Sentinel Econiq is Vent-Axia's latest flagship mechanical ventilation with heat recovery system. Designed and developed in the UK, it offers the highest level of comfort and functionality all year round.

Introducing a full range of products, with air performance suitable for all types of homes, the new Sentinel-X wireless controls platform delivers complete control over the home environment, provided through a full range of wired/wireless sensors and a smartphone app.

## A Whole New Experience

The highly sculpted interior surfaces, designed using the latest CFD techniques, ensure airflows are maximised through the unit, minimising noise and energy use. This feature alone provides an experience, that will delight homeowners, providing the most discrete and highly efficient ventilation available.

## Air Quality and Health

The MVHR filter options offer numerous benefits, including improved indoor air quality by removing allergens and particulate matter. They maintain the system's energy efficiency, reduce heating and cooling costs, and enhance the overall longevity of the system. Additionally, they capture bacteria, viruses and VOCs, promoting a healthier living environment. Regular filter maintenance extends the system's lifespan and ensures uninterrupted operation.

Whatever the outside environment, the system can help improve the indoor air quality by filtering out impurities, with ISO 60% Coarse (G4) supplied as standard, which can filter out sand, fine hair and particles larger than 10µm. Additional filtration can be achieved with a selection of optional filters, such as ISO ePM10 (M5), which can filter pollen, stone dust and particles smaller or equal to 10µm and ISO ePM2.5 (F7), which can filter out mould spores, bacteria and particles smaller or equal to 2.5µm.

The various sensor options allow for flexible installation in individual rooms, supporting effective management of the air in the home. For example, a CO<sub>2</sub> sensor located within a habitable room helps ensure a healthy and safe working environment. CO<sub>2</sub> levels managed at less than 1000ppm

help promote cognitive function. A humidity sensor located in the bathroom detects high levels of moisture can support good indoor air quality.

## Low Noise Levels

The Lo-Carbon Sentinel Econiq is one of the quietest systems on the market, with a noise level as low as 15.5 dB(A). The range is designed with an integral acoustic enclosure, made of steel, foam and expanded polypropylene (EPP), minimising breakout noise. The highly efficient motors are mounted on anti-vibration mounts to ensure minimal vibration transmission.

## Demand Control Ventilation

The Vent-Axia Connect smartphone application allows a multitude of functions to be adjusted from the comfort of the sofa, available on iOS and Android.

With smartphone-compatible controls, the homeowner is in full control of their ventilation all year round. They have the flexibility to increase the ventilation rate during hot periods in the summer or reducing the speed to minimise running costs while away.

The Sentinel control logic built within the MVHR ensures the system operates optimally with automated functions such as frost protection and summer bypass, providing comfort in the home.



## Integral Humidity Sensor

The integral humidity sensor increases speed in proportion to relative humidity levels, saving energy and reducing noise. The sensor also reacts to small but rapid increases in humidity, even if the normal trigger threshold is not reached. This unique feature ensures adequate ventilation, even for the smallest wet room. The nighttime relative humidity setback feature suppresses nuisance tripping as humidity gradually increases with falling temperatures.

## Airtight Buildings

Low-energy buildings typically have very low leakage rates (below 3m<sup>3</sup>/(h.m<sup>2</sup>) at 50Pa). This reduces the effectiveness of the standard frost protection strategy which imbalances the airflows.

## Spigot Options (M & L only)

The inclusion of horizontal spigots allows for flexible installation in tight spaces. It is possible to use both vertical and horizontal connections.

## Model

Description	Stock Ref
Sentinel Econiq S	499883
Sentinel Econiq M	499632
Sentinel Econiq L	499641

## Accessories

Description	Stock Ref
Acoustic Purge Fan	477988
Acoustic Purge Fan XL	479829
Wall Mounting Kit for Controller	411628
Econiq S Acoustic Solution Enclosure Kit	414012
Econiq S Acoustic Solution Top Box Kit	414013
Econiq S Acoustic Solution Top Box & Enclosure Kit	414014
Econiq M & L Floor Stand	414122

## Sensor Overview

Power	Colour	CO <sub>2</sub>	PIR	Temp.	Humidity	Wireless	4 Speed Switch	Stock Ref
Battery	White			✓	✓	✓		496431
Battery	White			✓	✓	✓	✓	496437
Battery	Black			✓	✓	✓	✓	497689
0-10V	White	✓		✓	✓			496432
240V	White			✓	✓	✓		496429
240V	White	✓		✓	✓	✓		496433
240V	White		✓			✓		496438
240V	White			✓	✓	✓	✓	496620
240V	Black			✓	✓	✓	✓	497693
240V	White			✓	✓		✓	496621
240V	Black			✓	✓		✓	497697

## Spare Filters

### Sentinel Econiq S

Description	Stock Ref
ISO 60% Coarse (G4) Filter 2 per Pack	411689
ISO ePM10 50% (M5) Filter 1 per Pack	472669
ISO ePM2.5 70% (F7) Filter 1 per Pack	472671

### Sentinel Econiq M & L

Description	Stock Ref
ISO 60% Coarse (G4) Filter 2 per Pack	411690
ISO ePM10 50% (M5) Filter 1 per Pack	411691
ISO ePM2.5 70% (F7) Filter 1 per Pack	411692

## SEC Class

Model	SEC Class
Econiq S	A+
Econiq M	A+
Econiq L	A+

## SAP PCDB Test Results

### Econiq S

	Thermal Efficiency %	SFP (W/l/s)
K+1	93	0.39
K+2	92	0.46
K+3	91	0.55
K+4	91	0.70
K+5	90	0.85
K+6	89	1.07
K+7	89	1.31

### Econiq M

	Thermal Efficiency %	SFP (W/l/s)
K+1	93	0.41
K+2	93	0.41
K+3	92	0.46
K+4	92	0.55
K+5	91	0.66
K+6	91	0.81
K+7	90	1.00

### Econiq L

	Thermal Efficiency %	SFP (W/l/s)
K+1	93	0.56
K+2	93	0.53
K+3	93	0.56
K+4	92	0.62
K+5	91	0.72
K+6	91	0.84
K+7	90	1.01

## Model Range Overview



Sentinel Econiq S

Sentinel Econiq M

Sentinel Econiq L

Recommended max system flow (l/s) @ Pressure (Pa)	97 @ 150	125 @ 150	167 @ 150
Acoustic Enclosure	○	X	X
Acoustic Top Box	○	X	X
Part F Compliant App Commissioning Certificate	✓	✓	✓
RF858 connectivity, 802.11b/g/n Wi-Fi and Bluetooth low energy 4.2	✓	✓	✓
Spigot Options Vertical - Horizontal	Vertical	Vertical & Horizontal	Vertical & Horizontal
Spigot size 125mm or 200mm	125	200	200
Left/Right Hand Orientation Through Control	✓	✓	✓
Fully automatic 100% summer bypass	✓	✓	✓
Active Frost Protection to -20°C	✓	✓	✓
Fault Code Indicator	✓	✓	✓
Easy Access Filters: ISO Coarse 65% (G4)	✓	✓	✓
Easy Access Filters: ISO ePM10 50% (M5)	○	○	○
Easy Access Filters: ISO ePM2.5 70% (F7)	○	○	○
Clean Filter Indicator (Time frame)	✓	✓	✓
PIN Number Lock	✓	✓	✓
Running Time Indicator	✓	✓	✓
Enthalpy Heat Exchanger	○	○	○
Soft-Start Boost	✓	✓	✓
Delay-On	✓	✓	✓
Number of controllable speeds	4	4	4
Installer function to copy/load unit setup	✓	✓	✓
Inputs 2 x 0-10V; 2 x LS; 5 x Volt-Free	✓	✓	✓
Integral Humidistat	✓	✓	✓
Relay outputs - For example control heaters or geothermal heat exchanger	○	○	○
BMS - modbus supported over RS485	✓	✓	✓
Operating ambient temperature (°C)	-20 to +40	-20 to +40	-20 to +40
Operating Humidity (%RH)	0 to 95	0 to 95	0 to 95
Mounting	Wall or Floor	Wall or Floor	Wall or Floor
Maintenance access	From Front	From Front	From Front

○ - Denote Optional



## Consultant's Specification

### Specification

The Mechanical Ventilation Heat Recovery Unit shall be the Lo-Carbon Sentinel Econiq S, M or L as manufactured by Vent-Axia. It should be sized as indicated on the drawings and shall be in accordance with the particular specification.

The unit shall be fully insulated for thermal and acoustic performance and shall incorporate a high-efficiency composite plastic counter-flow heat exchanger with an independently verified thermal efficiency of up to 93% when tested to EN 308.

The heat exchanger shall be protected by ISO 60% Coarse (G4) grade filters on extract and supply with the facility to accommodate ePM2.5 (F7) and ISO ePM10 (M5), or an inline filter such as the Vent-Axia Pure Air Carbon Filter. The built-in filters shall be accessible via tool-free access doors. The heat exchanger, motors, summer bypass and all other serviceable parts shall be accessible through the front of the unit.

The Sentinel Econiq shall automatically vary the ventilation rate via EC/DC motors, as it receives signals from optional or in-built sensor inputs. When a signal is received, the fans shall either vary their speed proportionally or on a normal/boost principle. The unit shall have the facility to commission the supply and extract fans individually via in-built minimum and maximum speed adjustment, alternative wired remote-control unit or via a compatible smartphone using the Vent-Axia Connect application. The fans themselves shall have independent, infinitely variable speed control.

The MVHR unit shall be manufactured with an ABS Outer case construction and an Expanded Polystyrene (EPS) inner chassis with custom motor and impeller mounting features. The inner chassis will assist in reducing noise and act as a large anti-vibration mount avoiding transmission through to the back mounting plate or the base of the unit. The MVHR unit shall be tested to ensure it meets the maximum allowable vibration of no more than 1mm/s, measured on the unit wall fixing points. The unit shall have a fully automatic 100% summer bypass, integral minimum and maximum infinitely variable speed controls with fascia mounted failure indication. The unit shall have low-energy, high efficiency EC/DC fan/motor assemblies with sealed for life bearings. The impellers shall be high-efficiency backward curved centrifugal type, achieving an SFP as low as 0.38W/l/s (EN 308).

The unit shall have two condensate drain outlets for handing to be defined onsite and during commissioning. The unit shall have wireless control capability options, using RF868 connectivity, 802.11b/g/n Wi-Fi and Bluetooth low energy 4.2. The unit shall use RF868 to connect to a wide ecosystem of wireless sensors including but not limited to CO<sub>2</sub>, temperature, and relative humidity. The unit shall be able to engage Wi-Fi to connect to local devices and create a local area network to allow for a larger network to be created for commissioning. The unit shall have Bluetooth low energy 4.2 to allow connectivity onto compatible smartphone devices. The unit shall be constructed with a removable tool free front panel which gives access to the removable on-board controller and other accessories. The EPS panel can then be removed with 4 screws allowing full maintenance access. This shall provide access to the following:

- ✓ Supply or extract fan
- ✓ Heat exchanger
- ✓ Access to the electrical connections

Access shall be provided for wiring termination and setup/commissioning. The unit can be supplied with either a backlit user interface or a blank plate, both of which shall be removable for remote mounting if required. Filters shall be accessed via the two filter drawers found near the top of the unit, the S shall have filter drawers and the M and L shall have filter caps.

Units shall be manufactured by Vent-Axia Ltd.

---

### Standard Controls

The Lo-Carbon Sentinel Econiq shall incorporate the following functions through a user interface fitted by the manufacturer or a paired smartphone with the Vent-Axia Connect application:

- ✓ Integral infinitely variable fan speed control on supply and extract.
- ✓ 6 speeds; 4 adjustable
- ✓ Left or Right hand spigot configuration, programmable during commissioning
- ✓ Tool free filter access
- ✓ Integral BMS interfaces – control and status indication
- ✓ Heating interlocks
- ✓ 24V external sensor supply, eg PIR sensor
- ✓ 0-10V proportional speed adjustment
- ✓ Volt free contacts
- ✓ Fully automatic summer bypass
- ✓ Filter check facility
- ✓ Control panel PIN number lock

The unit shall incorporate:

- ✓ An integral humidity sensor with the following features: Ambient Response; Raises the humidity trigger point as dwelling temperature reduces.
- ✓ Rapid Response: Monitors the rate of change in humidity and triggers increased airflow even if the humidity trigger threshold is not reached.
- ✓ Proportional Response; incrementally increases the fan speed to reduce noise and reduce energy consumption.
- ✓ RS485 connectivity – Long distance cabling to support multiple sensor connections.
- ✓ RF868 connectivity – Radio reference 868 MHZ for multiple wireless sensors pairing Bluetooth low energy 4.2 – Enable pairing within compatible smartphone device
- ✓ 802.11b/g/n Wi-Fi – Enable localised access point or connect to the local area network using the Vent-Axia Connect application, via a compatible smartphone device
- ✓ The unit shall incorporate an automatic 100% summer bypass damper which monitors internal and external temperatures to maintain the user comfort temperature (default 25°C): -
  - ‘Evening Fresh’ turns the unit to maximum speed with the bypass operational for 2 hours or until the user comfort temperature is reached (default 25°C).
  - ‘Night Time Fresh’ will run the unit at maximum speed with the bypass operational throughout the night or until the dwelling reaches minimum temperature (default 14°C).


Independently acoustically tested to BS EN 13141-7:2010

---

# Sentinel Econiq S

## Dimensions (mm)

Unit

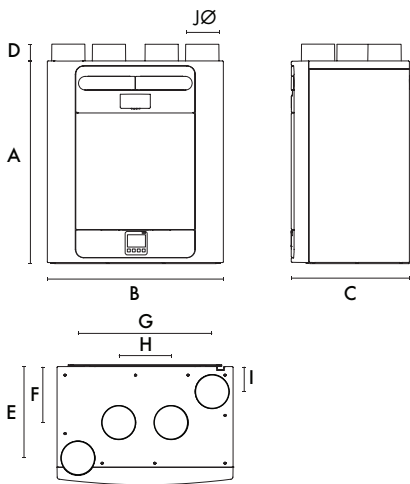

A	B	C	D	E	F	G	H	I	JØ	kg
760	660	443	63	343	210	503	197	93	125	27


Packed weight: 32kg

## Sound Spectrum (Unit only)


Speed	Test mode	Octave Band (Hz) Sound Power Levels, dB								LwA	SPL dB(A) @ 3m
		63	125	250	500	1k	2k	4k	8k		
20%	Supply	52.9	50.9	46.8	43.0	34.6	27.1	19.2	25.4	43.9	26.4
	Extract	50.3	49.0	36.0	31.5	23.6	16.1	18.9	25.3	36.4	18.9
	Breakout	34.6	34.8	35.7	34.9	29.6	25.1	21.0	25.3	36.0	15.5
40%	Supply	59.5	56.5	59.4	55.0	48.2	42.6	31.8	26.1	55.9	38.4
	Extract	51.9	51.3	50.4	41.2	35.0	25.3	19.8	25.4	44.8	27.3
	Breakout	40.2	42.6	46.5	45.4	41.0	36.2	25.5	25.3	46.5	26.0
60%	Supply	66.9	62.4	63.3	62.0	57.9	53.5	43.4	34.2	63.2	45.7
	Extract	60.6	60.3	54.2	49.5	44.4	36.2	27.9	26.3	51.7	34.2
	Breakout	45.5	49.8	52.5	53.1	49.7	46.7	36.2	26.9	54.5	34.0
80%	Supply	82.4	67.6	65.2	67.6	64.2	60.8	50.8	43.2	69.2	51.7
	Extract	75.5	68.6	59.3	56.0	48.3	44.2	36.9	31.3	58.6	41.1
	Breakout	59.2	55.0	56.8	60.0	55.4	53.9	44.1	33.4	61.0	40.5
100%	Supply	79.4	69.6	66.6	75.1	64.9	63.6	53.4	45.7	73.7	56.2
	Extract	72.4	70.5	60.5	56.4	49.8	46.3	39.0	33.4	59.5	42.0
	Breakout	63.0	57.1	58.5	63.7	56.8	55.9	46.4	36.2	63.5	43.0

Tested according to BS EN 13141-7:2010. Breakout quoted spherical. Supply and Extract quoted hemispherical. For in-duct data, end reflections are added based on the spigot size of the unit.

## Performance (Sentinel Econiq S)

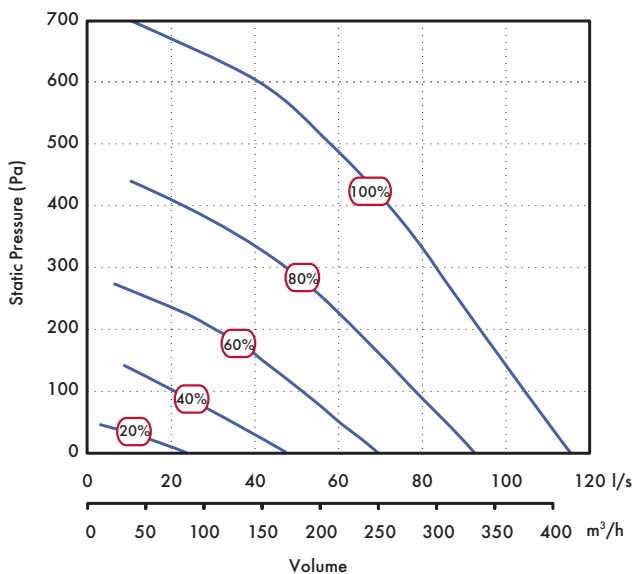

## Acoustic Solution

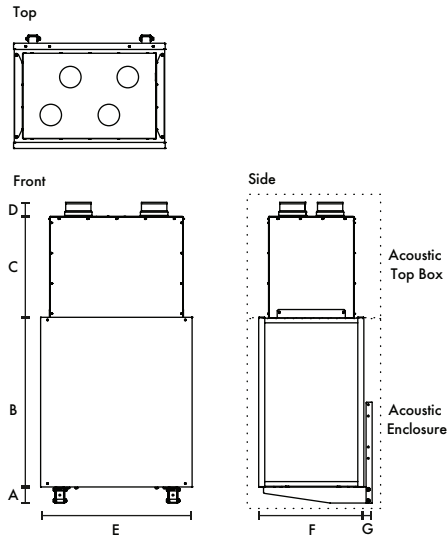


Acoustic Top Box		Acoustic Enclosure		kg	kg	Spigot			
A	B	C	D						
80	840	501	68	750	520	40	14	27	125

## Sound Spectrum (Solution Top Box & Enclosure Kit)

Speed	Test mode	Octave Band (Hz) Sound Power Levels, dB								LwA	SPL dB(A) @ 3m
		63	125	250	500	1k	2k	4k	8k		
20%	Supply	54.7	50.5	41.5	30.8	18.6	14.7	18.2	24.0	38.0	20.5
	Extract	54.8	41.7	31.4	20.2	15.2	13.8	18.3	24.3	31.9	14.4
	Breakout	36.6	47.3	38.0	24.7	19.3	16.6	19.1	23.6	34.0	13.5
40%	Supply	61.0	57.7	56.0	39.0	27.5	16.6	18.4	24.1	48.9	31.4
	Extract	55.7	50.8	44.6	26.8	19.1	15.0	18.2	24.0	39.2	21.7
	Breakout	55.9	55.2	48.2	35.5	29.9	20.9	20.4	25.3	42.6	22.1
60%	Supply	64.5	64.3	56.2	48.6	36.0	22.8	19.0	24.2	52.3	34.8
	Extract	59.4	57.3	46.6	36.0	25.6	17.4	18.6	24.5	43.9	26.4
	Breakout	43.5	60.5	49.5	43.5	39.0	32.0	23.8	23.7	47.6	27.1
80%	Supply	68.9	65.9	59.9	53.9	41.4	29.3	21.6	24.7	55.9	38.4
	Extract	63.1	69.3	52.6	43.0	33.4	23.7	20.2	24.6	54.5	37.0
	Breakout	48.3	69.8	52.7	48.3	44.7	39.8	33.2	25.9	57.1	36.6
100%	Supply	72.5	70.5	63.1	56.1	43.9	33.0	23.7	25.2	59.3	41.8
	Extract	70.3	61.9	56.2	45.4	36.6	28.0	22.9	24.6	51.5	34.0
	Breakout	54.3	67.1	63.3	51.3	47.9	43.9	38.5	28.7	57.7	37.2


## Spigot Configuration (Sentinel Econiq S)

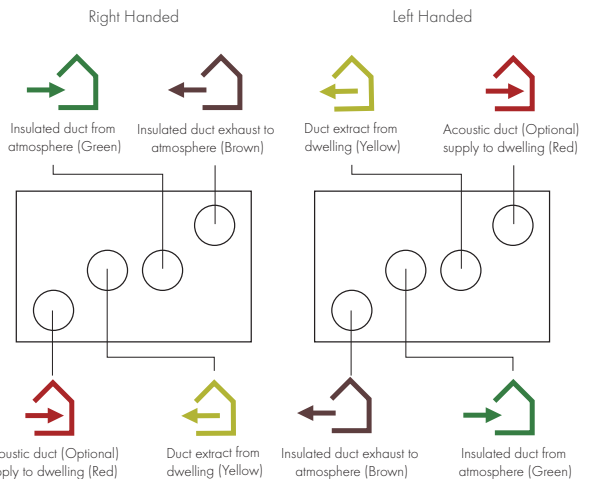

Hand-able through controller (except if pre-heater fitted)

# Sentinel Econiq M & L


## Dimensions (mm) (Sentinel Econiq M & L)

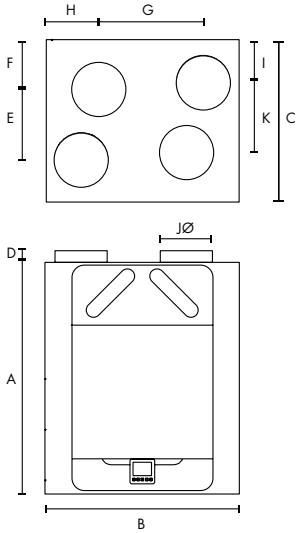

A	B	C	D	E	F	G	H	I	JØ	K	kg
881	728	608	50	261	187	394	200	160	200	261	50

Packed weight: 55kg

## Spigot Configuration (Sentinel Econiq M & L)

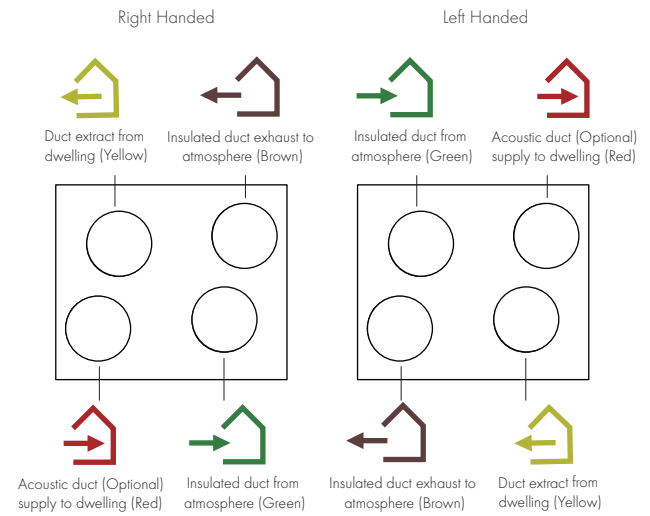


## Sound Spectrum (Sentinel Econiq M)

Speed	Test mode	Octave Band (Hz) Sound Power Levels, dB								SPL dB(A) @ 3m
		63	125	250	500	1k	2k	4k	8k	
20%	Breakout	32	41	35	31	24	17	19	23	12
	Inlet	48	42	33	23	19	14	17	22	13
	Outlet	55	55	48	41	34	23	18	22	27
40%	Breakout	36	45	46	42	36	25	19	23	22
	Inlet	54	45	43	33	31	20	18	22	21
	Outlet	64	58	57	52	49	40	26	22	37
60%	Breakout	43	50	51	48	44	36	22	23	29
	Inlet	59	51	51	39	39	29	20	22	28
	Outlet	69	64	65	58	58	51	38	26	45
80%	Breakout	48	55	56	53	50	43	30	24	34
	Inlet	65	56	57	46	44	37	26	22	34
	Outlet	73	68	67	64	63	59	47	35	50
100%	Breakout	60	60	57	58	55	47	36	29	38
	Inlet	69	59	54	48	48	41	31	24	35
	Outlet	76	70	67	69	66	63	53	42	53


## Sound Spectrum (Sentinel Econiq L)

Speed	Test mode	Octave Band (Hz) Sound Power Levels, dB								SPL dB(A) @ 3m
		63	125	250	500	1k	2k	4k	8k	
20%	Breakout	41	41	51	47	40	18	19	23	26
	Inlet	50	43	42	38	31	16	18	23	21
	Outlet	57	56	53	47	40	29	19	24	31
40%	Breakout	41	44	53	52	43	32	20	23	31
	Inlet	60	48	50	38	37	26	19	23	27
	Outlet	68	62	62	56	55	49	33	24	42
60%	Breakout	44	50	55	56	48	42	27	23	34
	Inlet	63	54	59	44	43	37	24	23	35
	Outlet	71	67	67	62	62	59	46	34	49
80%	Breakout	55	54	54	60	52	47	36	24	38
	Inlet	69	60	55	50	48	43	33	24	36
	Outlet	78	72	66	70	67	65	56	44	54
100%	Breakout	67	67	58	72	58	50	42	27	50
	Inlet	81	64	58	57	51	47	39	27	42
	Outlet	91	76	69	74	70	69	62	50	58

## Performance (Sentinel Econiq M)

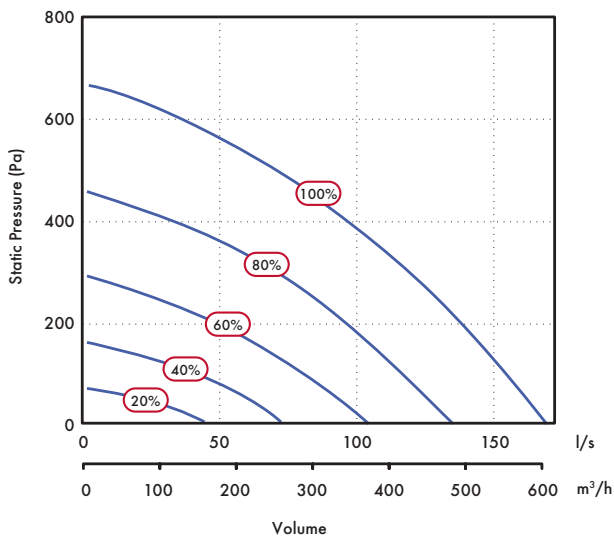

## Performance (Sentinel Econiq L)

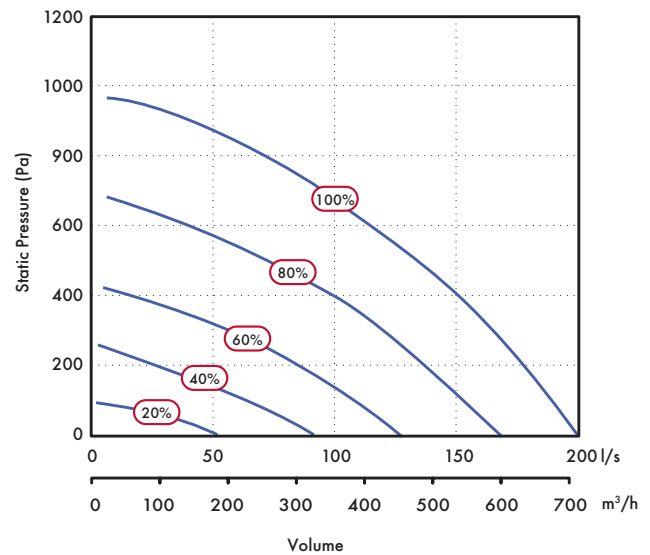

# Sentinel-X Controllers

## Battery Controllers & Sensors



### Battery - Internal Temperature and Humidity - Wireless

Room mounted humidity and temperature sensor for wired or wireless communication with a compatible system. Using an in-built RF 868 MHz (Wireless radio frequency), or RS485 (Wired connection) communication method whilst being powered by batteries.

- Dimensions (HxWxD) (mm) 60 x 60 x 22
- 2 x AAA Batteries included
- Temperature range 0~60°C
- Relative humidity range 0-90% RH
- Wireless range 20m closed/100m open
- RF 868MHz Wireless or RS485 Wired communication
- Status LED indicator for pairing, health check and fault conditions
- Mounted using provided back plate

Stock Ref

496431



### Battery - 4 Speed Switch with Temperature and Humidity - Wireless

Room mounted Speed Switch for wireless communication with a compatible system. Using an in-built RF 868 MHz (Wireless radio frequency) communication whilst being powered by batteries.

- Dimensions (HxWxD) (mm) 90 x 90 x 17
- 2 x AAA Batteries included
- Temperature range 0~60°C
- Relative humidity range 0-90% RH
- Wireless range 20m closed/100m open
- RF 868MHz Wireless
- Mounted using provided back plate or compatible with a standard single gang or surface mounted pattress box
- Status LED indicator for pairing, health check and fault conditions

Model

Stock Ref

White

496437

Black

497689

## HMI Kit



### Wall-mounted HMI Kit to suit Econiq models with full HMI

Includes HMI Blank controller, HMI backplate and cable.

- Dimensions (HxWxD) (mm) 90 x 90 x 17
- Power supply 240V
- Wireless range 20m closed/100m open
- RF 868MHz Wireless or RS485 Wired communication
- Compatible with standard single gang or surface mounted pattress box

Stock Ref

411628

## 24V Sensor



### 0-10V CO<sub>2</sub>, Temperature and Humidity - Wired

Room mounted CO<sub>2</sub> sensor with 0-10V signal output powered by an external 24V supply.

- Dimensions (HxWxD) (mm) 90 x 90 x 17
- 24V Power supply required
- Temperature range 0~60°C
- Relative humidity range 0-90% RH
- CO<sub>2</sub> range 0-2000PPM
- Compatible with standard single gang or surface mounted pattress box
- Status LED indicator for pairing, health check, faults & air quality traffic light index
- 0-10V Wired Communication

Stock Ref

496432

# Sentinel-X Controllers

## 240V Controllers & Sensors



### 240V - Internal Temperature and Humidity - Wireless

Room mounted humidity and temperature sensor for wired or wireless communication with a compatible system. Using an in-built RF 868 MHz (Wireless radio frequency), or RS485 (Wired connection) communication method whilst being powered by a local 240V supply.

- Dimensions (HxWxD) (mm) 90 x 90 x 17
- Power supply 240V
- Temperature range 0~60°C
- Relative humidity range 0-90% RH
- Wireless range 20m closed/100m open
- RF 868MHz Wireless or RS485 Wired communication
- Compatible with standard single gang or surface mounted pattress box
- Status LED indicator for pairing, health check, faults & air quality traffic light index

Stock Ref  
**496429**



### 240V - CO<sub>2</sub>, Temperature and Humidity - Wireless

Room mounted CO<sub>2</sub> sensor for wired or wireless communication with a compatible system. Using an in-built RF 868 MHz (Wireless radio frequency), or RS485 (Wired connection) communication method whilst being powered by a local 240V supply.

- Dimensions (HxWxD) (mm) 90 x 90 x 17
- Power supply 240V
- Temperature range 0~60°C
- Relative humidity range 0-90% RH
- CO<sub>2</sub> Range 0-2000 PPM
- Wireless range 20m closed/100m open
- RF 868MHz Wireless or RS485 Wired communication
- Compatible with standard single gang or surface mounted pattress box
- Status LED indicator for pairing, health check, faults & air quality traffic light index

Stock Ref  
**496433**



### 240V - 4 Speed Switch with Temperature and Humidity - Wired

Room mounted Speed Switch for wired communication with a compatible system. Using an in-built RS485 communication method powered by a local 240V supply.

- Dimensions (HxWxD) (mm) 90 x 90 x 17
- Power Supply 240V
- Temperature range 0~60°C
- Relative humidity range 0-90% RH
- Mounted using provided back plate or compatible with standard single gang or surface mounted pattress box
- Status LED indicator for pairing, health check and fault conditions
- RS485 Wired Connection

#### Model

White

Black

#### Stock Ref

**496621**

**497697**



### 240V - 4 Speed Switch with Temperature and Humidity - Wireless

Room mounted Speed Switch for wireless communication with a compatible system. Using an in-built RF 868 MHz (Wireless radio frequency) communication method whilst being powered by a local 240V supply.

- Dimensions (HxWxD) (mm) 90 x 90 x 17
- Power Supply 240V
- Temperature range 0~60°C
- Relative humidity range 0-90% RH
- Wireless range 20m closed/100m open
- RF 868MHz Wireless
- Mounted using provided back plate or compatible with standard single gang or surface mounted pattress box
- Status LED indicator for pairing, health check and fault conditions

Model  
White  
Black

Stock Ref  
**496620**  
**497693**



### 240V - PIR Sensor - Wireless

Room mounted PIR sensor for wired or wireless communication with a compatible system. Using an in-built RF 868 MHz (Wireless radio frequency), or RS485 (Wired connection) communication method whilst being powered by a local 240V supply. Room mounted presence detector for min/max or on/off control. Wall or ceiling mounting.

- Dimensions (HxWxD) (mm) 90 x 90 x 17
- Power supply 240V
- 5-25min run on timer
- PIR Range 3m
- Compatible with standard single gang or surface mounted pattress box
- Wireless range 20m closed/100m open
- RF 868MHz Wireless or RS485 Wired communication

Stock Ref  
**496438**

# Lo-Carbon Sentinel Econiq Passivhaus Certified

- Passivhaus certified
- New Sentinel-X wireless control platform
- Intelligent smart app control as standard
- Horizontal duct option for space-saving installations (M & L only)
- Sound levels as low as 15.5 dB(A) breakout - independently tested and verified by SRL
- Developed and manufactured in the UK
- Constant Volume - Maintains pre-set airflow irrespective of system pressure within its performance capabilities
- Built-in pre-heater as standard with optional external duct heaters



## Passivhaus

MVHR is a critical part of a Passivhaus project and its success in driving down energy demand. The performance of the MVHR system is considered an integral element of the primary Passivhaus heating demand calculation.

Vent-Axia's new range of MVHR's can support you with your next Passivhaus project with our most advanced MVHR's and wired or wireless control platform.

Our Passivhaus certified MVHR's provide up to 86% Thermal Efficiency. And free cooling through an Intelligent Summer Bypass during the warmer months

F7 Filters as standard, along with Constant Volume and internal pre-heaters means you will have control over your indoor environment.

The Lo-Carbon Sentinel Econiq is Vent-Axia's latest flagship mechanical ventilation with heat recovery system. Designed and developed in the UK, it offers the highest level of comfort and functionality all year round.

Introducing a full range of products, with air performance suitable for all types of homes, the new Sentinel-X wireless controls platform delivers complete control over the home environment, provided through a full range of wired/wireless sensors and a smartphone app.

## A Whole New Experience

The highly sculpted interior surfaces, designed using the latest CFD techniques, ensure airflows are maximised through the unit, minimising noise and energy use. This feature alone provides an experience, that will delight homeowners, providing the most discrete and highly efficient ventilation available.

## Air Quality and Health

The MVHR filter options offer numerous benefits, including improved indoor air quality by removing allergens and particulate matter. They maintain the system's energy efficiency, reduce heating and cooling costs, and enhance the overall longevity of the system. Additionally, they capture bacteria,

viruses and VOCs, promoting a healthier living environment. Regular filter maintenance extends the system's lifespan and ensures uninterrupted operation.

Whatever the outside environment, the system can help improve the indoor air quality by filtering out impurities, with ISO ePM2.5 (F7), which can filter out mould spores, bacteria and particles smaller or equal to 2.5µm supplied as standard on the supply side, we also have ISO 60% Coarse (G4) supplied as standard on extract, which can filter out sand, fine hair and particles larger than 10µm. Additional filtration can be achieved with a selection of optional filters, such as ISO ePM10 (M5), which can filter pollen, stone dust and particles smaller or equal to 10µm.

The various sensor options allow for flexible installation in individual rooms, supporting effective management of the air in the home. For example, a CO<sub>2</sub> sensor located within a habitable room helps ensure a healthy and safe working environment. CO<sub>2</sub> levels managed at less than 1000ppm help promote cognitive function. A humidity sensor located in the bathroom detects high levels of moisture can support good indoor air quality.


## Low Noise Levels

The Lo-Carbon Sentinel Econiq is one of the quietest systems on the market, with a noise level as low as 15.5 dB(A). The range is designed with an integral acoustic enclosure, made of steel, foam and expanded polypropylene (EPP), minimising breakout noise. The highly efficient motors are mounted on anti-vibration mounts to ensure minimal vibration transmission.

## Demand Control Ventilation


The Vent-Axia Connect smartphone application allows a multitude of functions to be adjusted from the comfort of the sofa, available on iOS and Android.

With smartphone compatible controls, the homeowner is in full control of their ventilation all year round. They have the flexibility to increase the ventilation rate during hot periods in the summer or reducing the speed to minimise running costs while away.





The Sentinel control logic built within the MVHR ensures the system operates optimally with automated functions such as frost protection and summer bypass, providing comfort in the home.



## Integral Humidity Sensor

The integral humidity sensor increases speed in proportion to relative humidity levels, saving energy and reducing noise. The sensor also reacts to small but rapid increases in humidity, even if the normal trigger threshold is not reached. This unique feature ensures adequate ventilation, even for the smallest wet room. The night time relative humidity setback feature suppresses nuisance tripping as humidity gradually increases with falling temperatures.

## Airtight Buildings

Low-energy buildings typically have very low leakage rates (below 3m<sup>3</sup>/(h.m<sup>2</sup>) at 50Pa). This reduces the effectiveness of the standard frost protection strategy which imbalances the airflows. With Passivhaus design very low air leakage rates are required to meet the standard and must be demonstrated for each certified building. The air change rate must be less than or equal to 0.6 air changes per hour at 50pa, under test conditions.

## Spigot Options (MCP & LCP only)

The inclusion of horizontal spigots allows for flexible installation in tight spaces. It is possible to use both vertical and horizontal connections.

## Model

Description	Stock Ref
Sentinel Econiq SCP RH	499890
Sentinel Econiq SCP LH	499891
Sentinel Econiq MCP RH	499639
Sentinel Econiq MCP LH	499640
Sentinel Econiq LCP RH	499648
Sentinel Econiq LCP LH	499649
Sentinel Econiq SCP RH with In-Duct Heater Passivhaus Kit	413664
Sentinel Econiq SCP LH with In-Duct Heater Passivhaus Kit	413665
Sentinel Econiq MCP RH with In-Duct Heater Passivhaus Kit	413666
Sentinel Econiq MCP LH with In-Duct Heater Passivhaus Kit	413667
Sentinel Econiq LCP RH with In-Duct Heater Passivhaus Kit	413668
Sentinel Econiq LCP LH with In-Duct Heater Passivhaus Kit	413669

## Accessories

Description	Stock Ref
In-Duct Heater - Ø125mm /1.25kW	413662
In-Duct Heater - Ø200mm /2.5kW	413663
Wall Mounting Kit for Controller	411628
Econiq S Acoustic Solution Enclosure Kit	414012
Econiq S Acoustic Solution Top Box Kit	414013
Econiq S Acoustic Solution Top Box & Enclosure Kit	414014
Econiq M & L Floor Stand	414122

## Spare Filters

### Sentinel Econiq SCP

Description	Stock Ref
ISO 60% Coarse (G4) Filter 2 per Pack	411689
ISO ePM10 50% (M5) Filter 1 per Pack	472669
ISO ePM2.5 70% (F7) Filter 1 per Pack	472671

### Sentinel Econiq MCP & LCP

Description	Stock Ref
ISO 60% Coarse (G4) Filter 2 per Pack	411690
ISO ePM10 50% (M5) Filter 1 per Pack	411691
ISO ePM2.5 70% (F7) Filter 1 per Pack	411692

## Sensor Overview

Power	Colour	CO <sub>2</sub>	PIR	Temp.	Humidity	Wireless	4 Speed Switch	Stock Ref
Battery	White			✓	✓	✓		496431
Battery	White			✓	✓	✓	✓	496437
Battery	Black			✓	✓	✓	✓	497689
0-10V	White	✓		✓	✓			496432
240V	White			✓	✓	✓		496429
240V	White	✓		✓	✓	✓		496433
240V	White		✓			✓		496438
240V	White			✓	✓	✓	✓	496620
240V	Black			✓	✓	✓	✓	497693
240V	White			✓	✓		✓	496621
240V	Black			✓	✓		✓	497697

## SEC Class

Model	SEC Class
Econiq SCP	A+
Econiq MCP	A+
Econiq LCP	A+

## Passive House Test Results

Model	Airflow range (m <sup>3</sup> /h)	Heat recovery rate (%)	Specific electric power (Wh/m <sup>3</sup> )
Econiq SCP	70-280	85	0.24
Econiq MCP	100-370	86	0.22
Econiq LCP	150-490	86	0.27

## SAP PCDB Test Results

	Econiq SCP		Econiq MCP		Econiq LCP	
	Thermal Efficiency %	SFP (W/l/s)	Thermal Efficiency %	SFP (W/l/s)	Thermal Efficiency %	SFP (W/l/s)
K+1	93	0.39	93	0.41	93	0.56
K+2	92	0.46	93	0.41	93	0.53
K+3	91	0.55	92	0.46	93	0.56
K+4	91	0.70	92	0.55	92	0.62
K+5	90	0.85	91	0.66	91	0.72
K+6	89	1.07	91	0.81	91	0.84
K+7	89	1.31	90	1.00	90	1.01

## Model Range Overview



	Sentinel Econiq SCP	Sentinel Econiq MCP	Sentinel Econiq LCP
Certified Passive House Component ID	2213vs03	2212vs03	2211vs03
Internal Pre-heater	✓	✓	✓
Acoustic Enclosure	○	X	X
Acoustic Top Box	○	X	X
Constant Volume	✓	✓	✓
Recommended max system flow (l/s) @ Pressure (Pa)	97 @ 150	125 @ 150	167 @ 150
Part F Compliant App Commissioning Certificate	✓	✓	✓
RF858 connectivity, 802.11b/g/n Wi-Fi and Bluetooth low energy 4.2	✓	✓	✓
Spigot Options Vertical - Horizontal	Vertical	Vertical & Horizontal	Vertical & Horizontal
Spigot size 125mm or 200mm	125	200	200
Left/Right Hand Orientation Through Control	✓	✓	✓
Fully automatic 100% summer bypass	✓	✓	✓
Active Frost Protection to -20°C	✓	✓	✓
Fault Code Indicator	✓	✓	✓
Easy Access Filters: ISO Coarse 65% (G4) Extract Only	✓	✓	✓
Easy Access Filters: ISO ePM10 50% (M5)	○	○	○
Easy Access Filters: ISO ePM2.5 70% (F7) Supply Only	✓	✓	✓
Clean Filter Indicator (Time frame)	✓	✓	✓
PIN Number Lock	✓	✓	✓
Running Time Indicator	✓	✓	✓
Enthalpy Heat Exchanger	○	○	○
Soft-Start Boost	✓	✓	✓
Delay-On	✓	✓	✓
Number of controllable speeds	4	4	4
Installer function to copy/load unit setup	✓	✓	✓
Inputs 2 x 0-10V; 2 x LS; 5 x Volt-Free	✓	✓	✓
Integral Humidistat	✓	✓	✓
Relay outputs - For example control heaters or geothermal heat exchanger	○	○	○
BMS - modbus supported over RS485	✓	✓	✓
Operating ambient temperature (°C)	-20 to +40	-20 to +40	-20 to +40
Operating Humidity (%RH)	0 to 95	0 to 95	0 to 95
Mounting	Wall or Floor	Wall or Floor	Wall or Floor
Maintenance access	From Front	From Front	From Front

○ - Denote Optional

## Consultant's Specification

### Specification

The Mechanical Ventilation Heat Recovery Unit shall be the Lo-Carbon Sentinel Econiq SCP, MCP or LCP as manufactured by Vent-Axia. It should be sized as indicated on the drawings and shall be in accordance with the particular specification.

The unit shall be fully insulated for thermal and acoustic performance and shall incorporate a high-efficiency composite plastic counter-flow heat exchanger with an independently verified thermal efficiency of up to 93% when tested to EN 308.

The heat exchanger shall be protected by ePM2.5 (F7) on supply and ISO 60% Coarse (G4) grade filters on extract with the facility to accommodate ISO ePM10 (M5), or an inline filter such as the Vent-Axia Pure Air Carbon Filter. The built-in filters shall be accessible via tool-free access doors. The heat exchanger, motors, summer bypass and all other serviceable parts shall be accessible through the front of the unit.

Intake air shall be pre-heated by the internal pre-heater at a trigger temperature of -3°C to protect the heat exchange cell. The Sentinel Econiq shall automatically vary the ventilation rate via EC/DC motors, as it receives signals from optional or in-built sensor inputs. When a signal is received, the fans shall either vary their speed proportionally or on a normal/boost principle. The unit shall have the facility to commission the supply and extract fans individually via in-built minimum and maximum speed adjustment, alternative wired remote-control unit or via a compatible smartphone using the Vent-Axia Connect application. The fans themselves shall have independent, infinitely variable speed control.

The MVHR unit shall be manufactured with an ABS Outer case construction and an Expanded Polystyrene (EPS) inner chassis with custom motor and impeller mounting features. The inner chassis will assist in reducing noise and act as a large anti-vibration mount avoiding transmission through to the back mounting plate or the base of the unit. The MVHR unit shall be tested to ensure it meets the maximum allowable vibration of no more than 1 mm/s, measured on the unit wall fixing points.

The unit shall have a fully automatic 100% summer bypass, integral minimum and maximum infinitely variable speed controls with fascia mounted failure indication. The unit shall have low-energy, high-efficiency EC/DC fan/motor assemblies with sealed for life bearings. The impellers shall be high-efficiency backward curved centrifugal type, achieving an SFP as low as 0.38W/l/s (EN 308).

The unit shall have two condensate drain outlets for handing to be defined onsite and during commissioning. The unit shall have wireless control capability options, using RF868 connectivity, 802.11b/g/n Wi-Fi and Bluetooth low energy 4.2. The unit shall use RF868 to connect to a wide ecosystem of wireless sensors including but not limited to CO<sub>2</sub>, temperature, and relative humidity. The unit shall be able to engage Wi-Fi to connect to local devices and create a local area network to allow for a larger network to be created for commissioning. The unit shall have Bluetooth low energy 4.2 to allow connectivity onto compatible smartphone devices. The unit shall be constructed with a removable tool-free front panel which gives access to the removable on-board controller and other accessories. The EPS panel can then be removed with 4 screws allowing full maintenance access. This shall provide access to the following:

- ✓ Supply or extract fan
- ✓ Heat exchanger
- ✓ Access to the electrical connections

Access shall be provided for wiring termination and setup/commissioning. The unit can be supplied with either a backlit user interface or a blank plate, both of which shall be removable for remote mounting if required. Filters shall be accessed via the two filter drawers found near the top of the unit, the S shall have filter drawers and the M and L shall have filter caps.

Units shall be manufactured by Vent-Axia Ltd.

---

### Standard Controls

The Lo-Carbon Sentinel Econiq shall incorporate the following functions through a user interface fitted by the manufacturer or a paired smartphone with the Vent-Axia Connect application: -

- ✓ Integral infinitely variable fan speed control on supply and extract.
- ✓ 6 speeds; 4 adjustable
- ✓ Left or Right hand spigot configuration, programmable during commissioning
- ✓ Tool free filter access
- ✓ Integral BMS interfaces - control and status indication
- ✓ Heating interlocks
- ✓ 24V external sensor supply, e.g. PIR sensor
- ✓ 0-10V proportional speed adjustment
- ✓ Volt free contacts
- ✓ Fully automatic summer bypass
- ✓ Filter check facility
- ✓ Control panel PIN number lock

The unit shall incorporate:

- ✓ An integral humidity sensor with the following features:
  - Ambient Response; Raises the humidity trigger point as dwelling temperature reduces.
- ✓ Rapid Response: Monitors the rate of change in humidity and triggers increased airflow even if the humidity trigger threshold is not reached.
- ✓ Proportional Response; incrementally increases the fan speed to reduce noise and reduce energy consumption.
- ✓ RS485 connectivity - Long distance cabling to support multiple sensor connections.
- ✓ RF868 connectivity - Radio reference 868 MHz for multiple wireless sensors pairing Bluetooth low energy 4.2 - Enable pairing within compatible smartphone device
- ✓ 802.11b/g/n Wi-Fi - Enable localised access point or connect to the local area network using the Vent-Axia Connect application, via a compatible smartphone device
- ✓ The unit shall incorporate an automatic 100% summer bypass damper which monitors internal and external temperatures to maintain the user comfort temperature (default 25°C):
  - 'Evening Fresh' turns the unit to maximum speed with the bypass operational for 2 hours or until the user comfort temperature is reached (default 25°C).
  - 'Night Time Fresh' will run the unit at maximum speed with the bypass operational throughout the night or until the dwelling reaches minimum temperature (default 14°C).


Independently acoustically tested to BS EN 13141-7:2010

---

# Sentinel Econiq SCP

## Dimensions (mm)

Unit

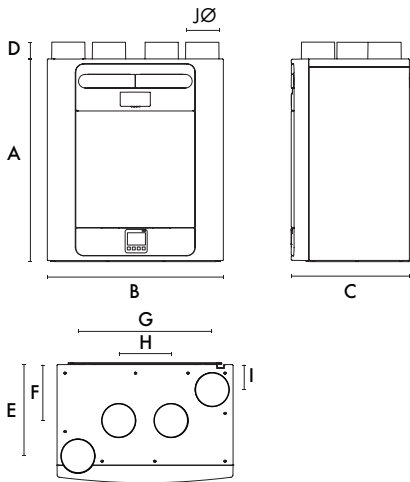

A	B	C	D	E	F	G	H	I	JØ	kg
760	660	443	63	343	210	503	197	93	125	27


Packed weight: 32kg

## Sound Spectrum (Unit only)


Speed	Test mode	Octave Band (Hz) Sound Power Levels, dB								LwA	SPL dB(A) @ 3m
		63	125	250	500	1k	2k	4k	8k		
20%	Supply	52.9	50.9	46.8	43.0	34.6	27.1	19.2	25.4	43.9	26.4
	Extract	50.3	49.0	36.0	31.5	23.6	16.1	18.9	25.3	36.4	18.9
	Breakout	34.6	34.8	35.7	34.9	29.6	25.1	21.0	25.3	36.0	15.5
40%	Supply	59.5	56.5	59.4	55.0	48.2	42.6	31.8	26.1	55.9	38.4
	Extract	51.9	51.3	50.4	41.2	35.0	25.3	19.8	25.4	44.8	27.3
	Breakout	40.2	42.6	46.5	45.4	41.0	36.2	25.5	25.3	46.5	26.0
60%	Supply	66.9	62.4	63.3	62.0	57.9	53.5	43.4	34.2	63.2	45.7
	Extract	60.6	60.3	54.2	49.5	44.4	36.2	27.9	26.3	51.7	34.2
	Breakout	45.5	49.8	52.5	53.1	49.7	46.7	36.2	26.9	54.5	34.0
80%	Supply	82.4	67.6	65.2	67.6	64.2	60.8	50.8	43.2	69.2	51.7
	Extract	75.5	68.6	59.3	56.0	48.3	44.2	36.9	31.3	58.6	41.1
	Breakout	59.2	55.0	56.8	60.0	55.4	53.9	44.1	33.4	61.0	40.5
100%	Supply	79.4	69.6	66.6	75.1	64.9	63.6	53.4	45.7	73.7	56.2
	Extract	72.4	70.5	60.5	56.4	49.8	46.3	39.0	33.4	59.5	42.0
	Breakout	63.0	57.1	58.5	63.7	56.8	55.9	46.4	36.2	63.5	43.0

Tested according to BS EN 13141-7:2010. Breakout quoted spherical. Supply and Extract quoted hemispherical. For in-duct data, end reflections are added based on the spigot size of the unit.

## Performance (Sentinel Econiq SCP)

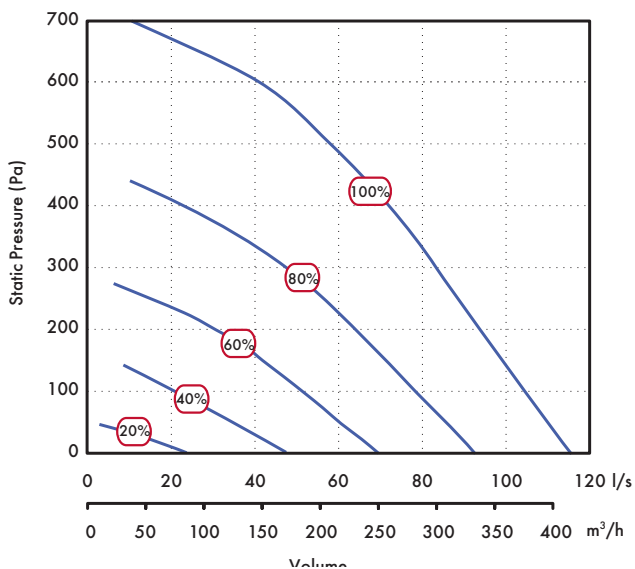

## Acoustic Solution

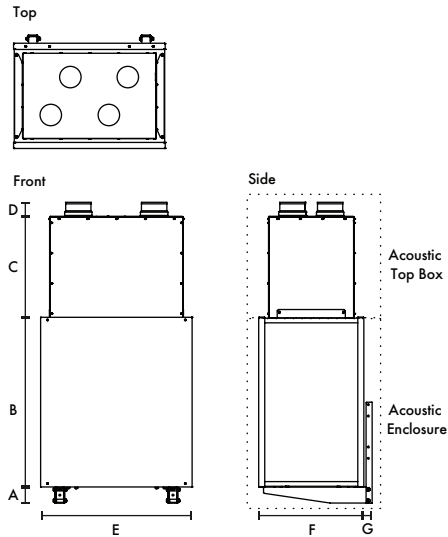


Acoustic Top Box		Acoustic Enclosure		kg	kg	Spigot
A	B	C	D			
80	840	501	68	14	27	125

## Sound Spectrum (Solution Top Box & Enclosure Kit)

Speed	Test mode	Octave Band (Hz) Sound Power Levels, dB								LwA	SPL dB(A) @ 3m
		63	125	250	500	1k	2k	4k	8k		
20%	Supply	54.7	50.5	41.5	30.8	18.6	14.7	18.2	24.0	38.0	20.5
	Extract	54.8	41.7	31.4	20.2	15.2	13.8	18.3	24.3	31.9	14.4
	Breakout	36.6	47.3	38.0	24.7	19.3	16.6	19.1	23.6	34.0	13.5
40%	Supply	61.0	57.7	56.0	39.0	27.5	16.6	18.4	24.1	48.9	31.4
	Extract	55.7	50.8	44.6	26.8	19.1	15.0	18.2	24.0	39.2	21.7
	Breakout	55.9	55.2	48.2	35.5	29.9	20.9	20.4	25.3	42.6	22.1
60%	Supply	64.5	64.3	56.2	48.6	36.0	22.8	19.0	24.2	52.3	34.8
	Extract	59.4	57.3	46.6	36.0	25.6	17.4	18.6	24.5	43.9	26.4
	Breakout	43.5	60.5	49.5	43.5	39.0	32.0	23.8	23.7	47.6	27.1
80%	Supply	68.9	65.9	59.9	53.9	41.4	29.3	21.6	24.7	55.9	38.4
	Extract	63.1	69.3	52.6	43.0	33.4	23.7	20.2	24.6	54.5	37.0
	Breakout	48.3	69.8	52.7	48.3	44.7	39.8	33.2	25.9	57.1	36.6
100%	Supply	72.5	70.5	63.1	56.1	43.9	33.0	23.7	25.2	59.3	41.8
	Extract	70.3	61.9	56.2	45.4	36.6	28.0	22.9	24.6	51.5	34.0
	Breakout	54.3	67.1	63.3	51.3	47.9	43.9	38.5	28.7	57.7	37.2


## Spigot Configuration (Sentinel Econiq SCP)

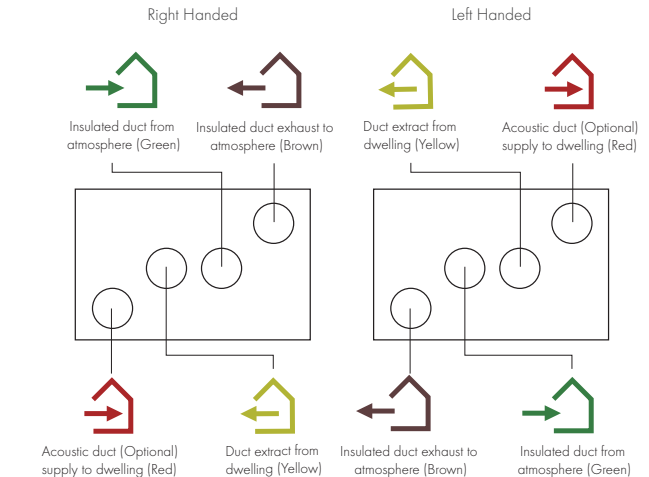

Hand-able through controller (except if pre-heater fitted)

# Sentinel Econiq MCP & LCP


## Dimensions (mm) (Sentinel Econiq MCP & LCP)

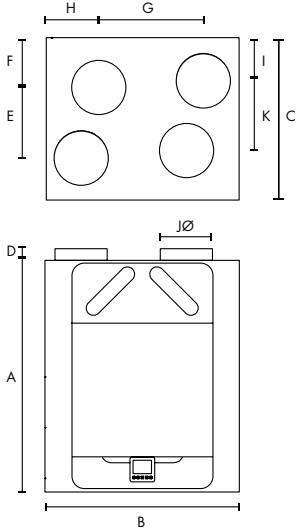

A	B	C	D	E	F	G	H	I	JØ	K	kg
881	728	608	50	261	187	394	200	160	200	261	50

Packed weight: 55kg

## Spigot Configuration (Sentinel Econiq MCP & LCP)

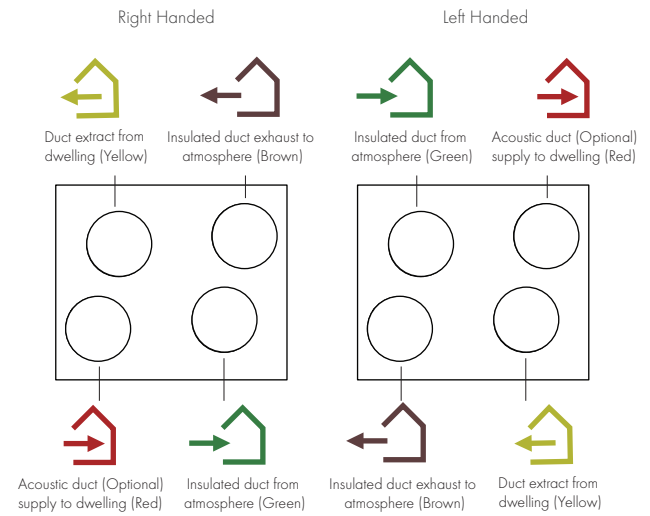

For Passivhaus units handling must be chosen at the point of order as this is managed in production.


## Sound Spectrum (Sentinel Econiq MCP)

Speed	Test mode	Octave Band (Hz) Sound Power Levels, dB								SPL dB(A) @ 3m
		63	125	250	500	1k	2k	4k	8k	
20%	Breakout	32	41	35	31	24	17	19	23	12
	Inlet	48	42	33	23	19	14	17	22	13
	Outlet	55	55	48	41	34	23	18	22	27
40%	Breakout	36	45	46	42	36	25	19	23	22
	Inlet	54	45	43	33	31	20	18	22	21
	Outlet	64	58	57	52	49	40	26	22	37
60%	Breakout	43	50	51	48	44	36	22	23	29
	Inlet	59	51	51	39	39	29	20	22	28
	Outlet	69	64	65	58	58	51	38	26	45
80%	Breakout	48	55	56	53	50	43	30	24	34
	Inlet	65	56	57	46	44	37	26	22	34
	Outlet	73	68	67	64	63	59	47	35	50
100%	Breakout	60	60	57	58	55	47	36	29	38
	Inlet	69	59	54	48	48	41	31	24	35
	Outlet	76	70	67	69	66	63	53	42	53


## Sound Spectrum (Sentinel Econiq LCP)

Speed	Test mode	Octave Band (Hz) Sound Power Levels, dB								SPL dB(A) @ 3m
		63	125	250	500	1k	2k	4k	8k	
20%	Breakout	41	41	51	47	40	18	19	23	26
	Inlet	50	43	42	38	31	16	18	23	21
	Outlet	57	56	53	47	40	29	19	24	31
40%	Breakout	41	44	53	52	43	32	20	23	31
	Inlet	60	48	50	38	37	26	19	23	27
	Outlet	68	62	62	56	55	49	33	24	42
60%	Breakout	44	50	55	56	48	42	27	23	34
	Inlet	63	54	59	44	43	37	24	23	35
	Outlet	71	67	67	62	62	59	46	34	49
80%	Breakout	55	54	54	60	52	47	36	24	38
	Inlet	69	60	55	50	48	43	33	24	36
	Outlet	78	72	66	70	67	65	56	44	54
100%	Breakout	67	67	58	72	58	50	42	27	50
	Inlet	81	64	58	57	51	47	39	27	42
	Outlet	91	76	69	74	70	69	62	50	58

## Performance (Sentinel Econiq MCP)

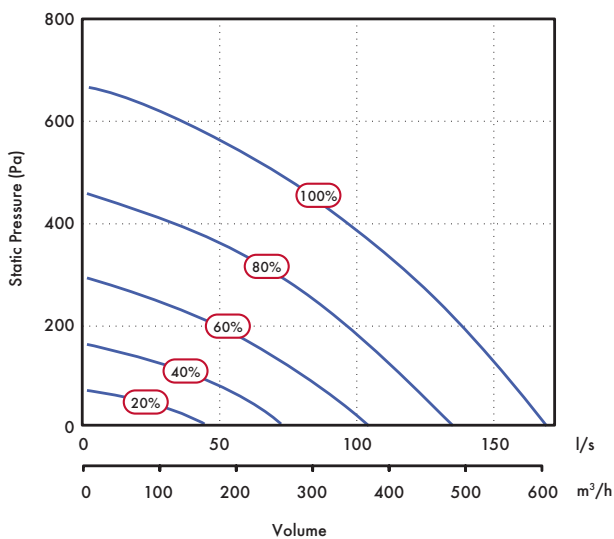

## Performance (Sentinel Econiq LCP)

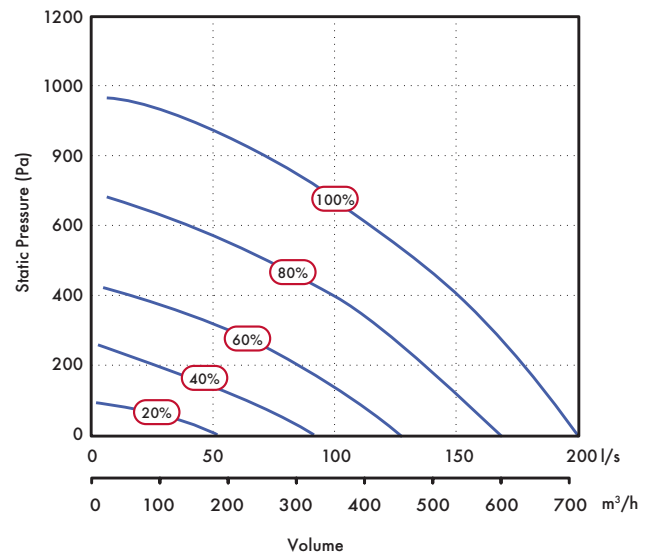

# Sentinel-X Controllers

## Battery Controllers & Sensors



### Battery - Internal Temperature and Humidity - Wireless

Room mounted humidity and temperature sensor for wired or wireless communication with a compatible system. Using an in-built RF 868 MHz (Wireless radio frequency), or RS485 (Wired connection) communication method whilst being powered by batteries.

- Dimensions (HxWxD) (mm) 60 x 60 x 22
- 2 x AAA Batteries included
- Temperature range 0~60°C
- Relative humidity range 0-90% RH
- Wireless range 20m closed/100m open
- RF 868MHz Wireless or RS485 Wired communication
- Status LED indicator for pairing, health check and fault conditions
- Mounted using provided back plate

Stock Ref

496431



### Battery - 4 Speed Switch with Temperature and Humidity - Wireless

Room mounted Speed Switch for wireless communication with a compatible system. Using an in-built RF 868 MHz (Wireless radio frequency) communication whilst being powered by batteries.

- Dimensions (HxWxD) (mm) 90 x 90 x 17
- 2 x AAA Batteries included
- Temperature range 0~60°C
- Relative humidity range 0-90% RH
- Wireless range 20m closed/100m open
- RF 868MHz Wireless
- Mounted using provided back plate or compatible with a standard single gang or surface mounted pattress box
- Status LED indicator for pairing, health check and fault conditions

Model

White

Black

Stock Ref

496437

497689

## HMI Kit



### Wall-mounted HMI Kit to suit Econiq models with full HMI

Includes HMI Blank controller, HMI backplate and cable.

- Dimensions (HxWxD) (mm) 90 x 90 x 17
- Power supply 240V
- Wireless range 20m closed/100m open
- RF 868MHz Wireless or RS485 Wired communication
- Compatible with standard single gang or surface mounted pattress box

Stock Ref

411628

## 24V Sensor



### 0-10V CO<sub>2</sub>, Temperature and Humidity - Wired

Room mounted CO<sub>2</sub> sensor with 0-10V signal output powered by an external 24V supply.

- Dimensions (HxWxD) (mm) 90 x 90 x 17
- 24V Power supply required
- Temperature range 0~60°C
- Relative humidity range 0-90% RH
- CO<sub>2</sub> range 0-2000PPM
- Compatible with standard single gang or surface mounted pattress box
- Status LED indicator for pairing, health check, faults & air quality traffic light index
- 0-10V Wired Communication

Stock Ref

496432



# Sentinel-X Controllers

## 240V Controllers & Sensors



### 240V - Internal Temperature and Humidity - Wireless

Room mounted humidity and temperature sensor for wired or wireless communication with a compatible system. Using an in-built RF 868 MHz (Wireless radio frequency), or RS485 (Wired connection) communication method whilst being powered by a local 240V supply.

- Dimensions (HxWxD) (mm) 90 x 90 x 17
- Power supply 240V
- Temperature range 0~60°C
- Relative humidity range 0-90% RH
- Wireless range 20m closed/100m open
- RF 868MHz Wireless or RS485 Wired communication
- Compatible with standard single gang or surface mounted pattress box
- Status LED indicator for pairing, health check, faults & air quality traffic light index

Stock Ref  
496429



### 240V - CO<sub>2</sub>, Temperature and Humidity - Wireless

Room mounted CO<sub>2</sub> sensor for wired or wireless communication with a compatible system. Using an in-built RF 868 MHz (Wireless radio frequency), or RS485 (Wired connection) communication method whilst being powered by a local 240V supply.

- Dimensions (HxWxD) (mm) 90 x 90 x 17
- Power supply 240V
- Temperature range 0~60°C
- Relative humidity range 0-90% RH
- CO<sub>2</sub> Range 0-2000 PPM
- Wireless range 20m closed/100m open
- RF 868MHz Wireless or RS485 Wired communication
- Compatible with standard single gang or surface mounted pattress box
- Status LED indicator for pairing, health check, faults & air quality traffic light index

Stock Ref  
496433



### 240V - 4 Speed Switch with Temperature and Humidity - Wired

Room mounted Speed Switch for wired communication with a compatible system. Using an in-built RS485 communication method powered by a local 240V supply.

- Dimensions (HxWxD) (mm) 90 x 90 x 17
- Power Supply 240V
- Temperature range 0~60°C
- Relative humidity range 0-90% RH
- Mounted using provided back plate or compatible with standard single gang or surface mounted pattress box
- Status LED indicator for pairing, health check and fault conditions
- RS485 Wired Connection

Model  
White  
Black

Stock Ref  
496621  
497697



### 240V - 4 Speed Switch with Temperature and Humidity - Wireless

Room mounted Speed Switch for wireless communication with a compatible system. Using an in-built RF 868 MHz (Wireless radio frequency) communication method whilst being powered by a local 240V supply.

- Dimensions (HxWxD) (mm) 90 x 90 x 17
- Power Supply 240V
- Temperature range 0~60°C
- Relative humidity range 0-90% RH
- Wireless range 20m closed/100m open
- RF 868MHz Wireless
- Mounted using provided back plate or compatible with standard single gang or surface mounted pattress box
- Status LED indicator for pairing, health check and fault conditions

Model  
496621

Stock Ref  
497697



### 240V - PIR Sensor - Wireless

Room mounted PIR sensor for wired or wireless communication with a compatible system. Using an in-built RF 868 MHz (Wireless radio frequency), or RS485 (Wired connection) communication method whilst being powered by a local 240V supply. Room mounted presence detector for min/max or on/off control. Wall or ceiling mounting.

- Dimensions (HxWxD) (mm) 90 x 90 x 17
- Power supply 240V
- 5-25min run on timer
- PIR Range 3m
- Compatible with standard single gang or surface mounted pattress box
- Wireless range 20m closed/100m open
- RF 868MHz Wireless or RS485 Wired communication

Stock Ref  
496433

# Lo-Carbon Sentinel Kinetic<sup>®</sup> BH

- Recognised in SAP PCDB
- Lightweight for easier installation
- Horizontal duct option for space-saving installations
- Fits within a 290mm deep kitchen cupboard
- Integrated digital controller for simple and accurate commissioning
- Plug and play controls; Humidistat
- BMS connectivity
- LS inputs (Light Switch)
- Horizontal duct options
- Acoustic Enclosure option for reduced breakout noise
- Acoustic Top Box option for reduced in-duct noise



## Easy Installation

The Sentinel Kinetic models can be mounted vertically in a roof space, hallway cupboard or kitchen or within a kitchen cupboard. When mounted in an unheated area ducting and MVHR unit should be insulated. Ducting can be attached to the unit horizontally, vertically or both. Minimum internal depth of kitchen cupboard 290mm.

For scenarios where noise is a critical issue, an Acoustic Enclosure is available to reduce breakout noise and the Acoustic Top Box will reduce in-duct noise at key frequencies.

**Left (L) or right (R) hand installation.** The unit is supplied with duct spigots to outside on the right hand side. These can be reversed on site by simply removing the control panel, rotating the unit 180 degrees and re-attaching the control panel.

## Spigot Options

The combination of spigot options allows installation in confined locations. If vertical and horizontal connection is required on the same outlet/inlet, additional spigots can be supplied.

The condensate drain can be taken out through the back, side or bottom of the unit. Using the fittings supplied, the final condensate connection is made outside the unit and can be completed after installation.

## Integral Humidity Sensor (BH Models)

The integral humidity sensor increases speed in proportion to relative humidity levels, saving energy and reducing noise. The sensor also reacts to small but rapid increases in humidity, even if the normal trigger threshold is not reached. This unique feature ensures adequate ventilation, even for the smallest wet room. The night time relative humidity setback feature suppresses nuisance tripping as humidity gradually increases with falling temperature.

## Models

Model	Stock Ref
Kinetic VS Right	438342
Kinetic BH Right	443319
Kinetic BH Right with Acoustic Enclosure & Top Box	479526
Kinetic BH Right with Acoustic Top Box	479525
Kinetic BH Right with Acoustic Enclosure	479524
Kinetic BH Left	443319L
Kinetic BH Left with Acoustic Enclosure & Top Box	479529
Kinetic BH Left with Acoustic Top Box	479528
Kinetic BH Left with Acoustic Enclosure (BH with summer bypass & humidity sensor)	479527

## Accessories

Model	Stock Ref
Wired Remote Controller	443283
LED alarm with 15m cable	448356
Acoustic Purge Fan	477988
Acoustic Purge Fan XL	479829
ISO 45% Coarse (G3) 2x Filter	442356
ISO ePM10 50% Pollen (M5) 1x Filter	444199
Anti Vibration Mounts	68MP033G

## SAP PCDB performance (Kinetic VS)


	SAP 2009		SAP 2012	
	Thermal		Thermal	
	Efficiency %	SFP (W/l/s)	Efficiency %	SFP (W/l/s)
K+1	90	0.60	90	0.61
K+2	90	0.59	90	0.74
K+3	90	0.68	90	0.95
K+4	89	0.79	90	1.19
K+5	90	0.97	-	-

## SEC Class

Model	SEC Class
Kinetic VS & BH	A


## Dimensions (mm)

Unit

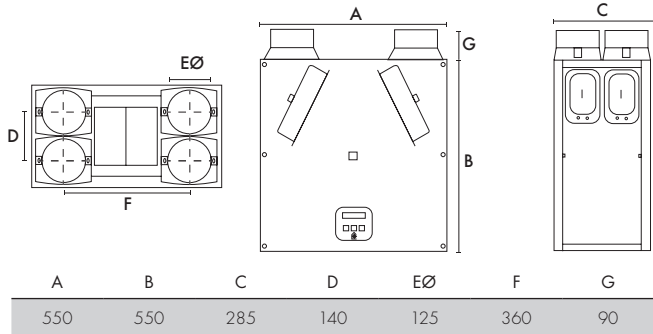

Weight: 15kg

## Acoustic Solution

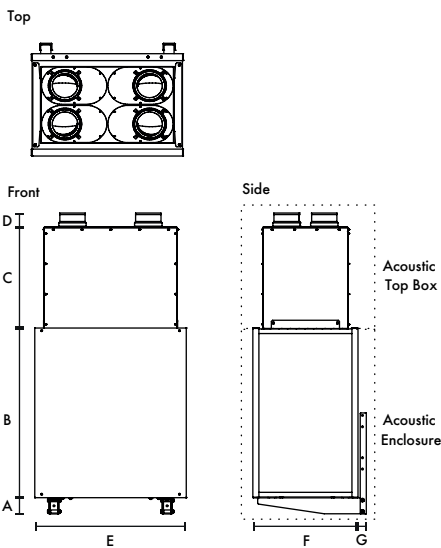

Acoustic Acoustic  
Top Box Enclosure

A	B	C	D	E	F	G	kg	kg	Spigot
80	633	501	75	626	447	45	11	19	125

## Sound Data (Kinetic VS & BH)


Speed	Test mode	Octave band, Hz, dB SWL								SPL dB(A) @ 3m	
		63	125	250	500	1k	2k	4k	8k		LwA
20%	Supply	52.9	52.9	46.5	41.7	39.3	29.3	19.3	22.8	44.4	26.9
	Extract	50.7	41.9	37.4	34.5	29.8	17.7	17.4	22.7	35.7	18.2
	Breakout	36	34.5	33.6	34.3	33.8	27.2	22.2	25.3	37.2	16.7
40%	Supply	57.1	64.1	56.8	50.6	49.7	41.1	32.8	26.4	54.7	37.2
	Extract	55.2	50.3	44.9	43	38.3	27.7	19.8	22.9	43.8	26.3
	Breakout	43.5	41.7	40.4	41.3	41.7	36.1	27.8	26.2	44.7	24.2
60%	Supply	71.3	72.5	68.5	57.6	56.4	51.1	42.7	38.1	63.6	46.1
	Extract	60.2	56.3	52	48.8	44.8	35.5	26.9	24.4	50.2	32.7
	Breakout	50.7	47.8	47.7	47.7	48.3	44.9	36.7	30	51.8	31.3
80%	Supply	66.3	74.8	71.2	62.8	61	56.3	49.8	46.7	67.3	49.8
	Extract	63.8	59.4	57.6	53.8	49.2	41.2	33.5	29	55.0	37.5
	Breakout	54.4	52.7	54	52.7	53.5	50.3	43.6	37.7	57.2	36.7
100%	Supply	70.3	75.7	73.9	66.3	63.5	59.7	53.2	50.6	70.0	52.5
	Extract	66.6	63.9	60.9	56.5	51.2	44.2	36.8	32.6	57.9	40.4
	Breakout	59.1	55.2	56.8	55.6	56.1	53.5	47.1	41.6	60.1	39.6

Tested according to BS EN 13141-7:2010. Breakout quoted spherical. Supply and Extract quoted hemispherical. For in-duct data, end reflections are added based on the spigot size of the unit.


## Performance

Fan speeds are fully adjustable within the performance range.

### Vertical Spigots

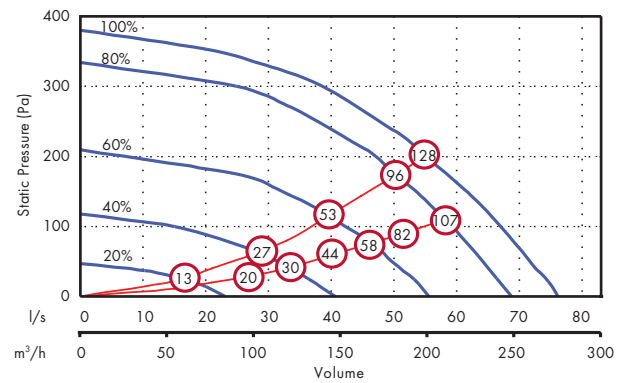

### Horizontal Spigots

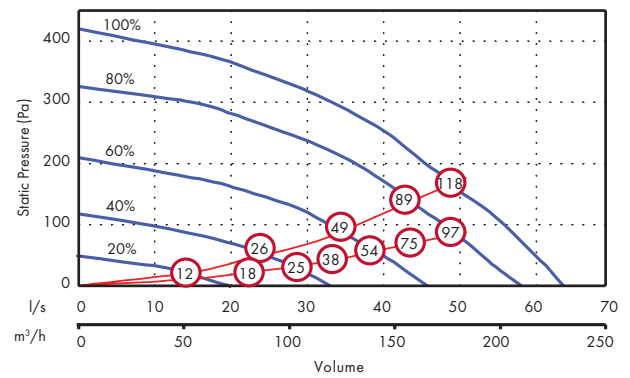

(x) figure relates to Wattage (both motors)

## Sound Data (Kinetic VS & BH with Acoustic Solution)

Speed	Test mode	Octave band, Hz, dB SWL								SPL dB(A) @ 3m	
		63	125	250	500	1k	2k	4k	8k		LwA
20%	Supply	57.1	44.6	36.4	27.9	20.6	14.8	18.1	23.8	35.2	17.7
	Extract	54.4	40.1	29.6	22.2	17.5	14.5	17.8	23.5	31.1	13.6
	Breakout	37.5	33.8	29.1	22.9	17.0	14.0	17.8	23.6	27.7	7.2
40%	Supply	64.9	56.3	46.4	36.1	28.2	15.4	18.1	23.8	44.6	27.1
	Extract	60.2	46.8	35.7	28.2	21.9	14.8	18.1	23.7	36.6	19.1
	Breakout	46.0	43.6	36.3	30.4	23.9	15.9	18.1	23.6	33.5	13.0
60%	Supply	72.3	63.0	55.6	43.1	34.1	19.5	18.6	24.0	51.9	34.4
	Extract	61.4	53.3	43.4	34.7	27.2	15.5	18.1	23.8	41.4	23.9
	Breakout	52.2	50.5	44.4	38.2	33.5	23.8	19.3	23.8	41.0	20.5
80%	Supply	73.8	67.9	61.6	50.0	38.6	23.4	20.2	25.2	56.8	39.3
	Extract	68.6	58.2	50.5	40.5	31.1	17.2	18.2	23.9	47.5	30.0
	Breakout	65.6	55.5	50.5	43.8	39.7	32.7	24.9	24.0	47.4	26.9
100%	Supply	77.3	70.8	64.9	53.8	41.4	26.3	21.9	26.8	60.1	42.6
	Extract	71.5	60.6	53.5	43.9	33.4	19.1	18.5	24.0	50.5	33.0
	Breakout	69.0	58.4	53.4	47.1	43.0	37.5	29.9	24.9	51.1	30.6

## Consultant's Specification

### Operation

The supply and extract ventilation unit shall be a Sentinel Kinetic as manufactured by Vent-Axia and shall be sized as indicated on the drawings and shall be in accordance with the particular specification.

Supply air to the room shall be pre-heated by the extract air via the integrated composite plastic counterflow heat recovery cell. The Sentinel Kinetic shall automatically vary the ventilation rate via EC/DC motors, as it receives signals from one of the optional interconnected sensors. When a signal is received, the fans shall either vary their speed proportionally or on a trickle and boost principle.

The unit shall have the facility to commission the supply and extract fans individually via in-built minimum and maximum speed adjustment, or alternative wired remote control unit. The fans themselves shall have independent, infinitely variable speed control.

### Unit Specification

The unit shall be manufactured with an ABS outer case construction, and incorporate a reversible core to allow for left or right hand mounting.

The unit shall have a high efficiency composite plastic counterflow heat exchanger, supply and extract filters, automatic summer bypass, integral minimum and maximum infinitely variable speed controls with fascia mounted failure indication. The unit shall have low energy, high efficiency EC/DC fan/motor assemblies with sealed for life bearings. The impellers shall be high efficiency forward curved centrifugal type.

The unit shall have a heat exchanger cell with a thermal efficiency of up to 91.1% when tested to EN 308. This shall be protected by ISO 45% Coarse (G3) grade synthetic filters on supply and extract. Complete with a condensate drip tray and drain connection.

The unit shall be constructed with a removable Core allowing full maintenance access. The removable Core shall provide access to the following:

- ✓ Supply and extract filter
- ✓ Heat exchanger
- ✓ Access to the electrical connections

To reduce breakout noise, the MVHR unit shall be provided with an Acoustic Enclosure of steel construction lined with class 'O' acoustic foam. To reduce in-duct noise, the top of the MVHR shall be fitted with an Acoustic Top Box to provide attenuation to the 4 ducts of the unit. This Acoustic Top Box shall be of steel construction lined with acoustic class 'O' foam with the MVHR spigots linked to the Top Box via 4 separate attenuated ducts. The acoustic enclosure and top box shall each be independently tested for noise to BS EN 13141-7.

The MVHR unit shall incorporate an Expanded Polystyrene (EPS) inner chassis with custom motor and impeller mounting features. The inner chassis will assist in reducing noise and act as a large anti-vibration mount avoiding transmission through to the back mounting plate or the base of the unit.

The MVHR unit shall be tested to ensure it meets the maximum allowable vibration of no more than 1 mm/s, measured on the unit wall fixing points.

Access shall be provided for wiring termination and setup/commissioning. The backlit LCD user interface therein shall be removable for remote mounting if required.


Units shall be as manufactured by Vent-Axia Ltd.

### Standard Controls


All Sentinel Kinetic units shall incorporate the following functions integrally mounted, pre-wired and factory fitted by the manufacturer:

- ✓ Integral infinitely variable fan speed control on supply and extract
- ✓ Integral min/max ventilation control/set point
- ✓ Integral BMS interfaces - control and status indication
- ✓ Heating interlocks
- ✓ 0-10V proportional speed adjustment
- ✓ Volt free contacts
- ✓ 24V sensor supply
- ✓ Integral on/off or trickle boost function from remote switch e.g. PIR occupancy detector
- ✓ The unit shall be controlled by the 'Sentinel' control devices (enablers and sensors) as detailed in the schedule or on the drawings
- ✓ Fully automatic summer bypass
- ✓ Switched Live input with adjustable 'delay-on' feature
- ✓ Fan failure or component failure indicated via individual fault code display
- ✓ Running time counter
- ✓ Control panel PIN number lock
- ✓ Automatic frost protection effective to -20°C
- ✓ Tool free filter access
- ✓ The unit shall incorporate ('H' models) an integral humidity sensor with the following features:
  - Ambient Response; Raises the humidity trigger point as dwelling temperature reduces
  - Rapid Response; Monitors the rate of change in humidity and triggers increased airflow even if the humidity trigger threshold is not reached
  - Proportional Response; Incrementally increases the fan speed to reduce noise and reduce energy consumption

### Mounting Option




## Airflow Direction

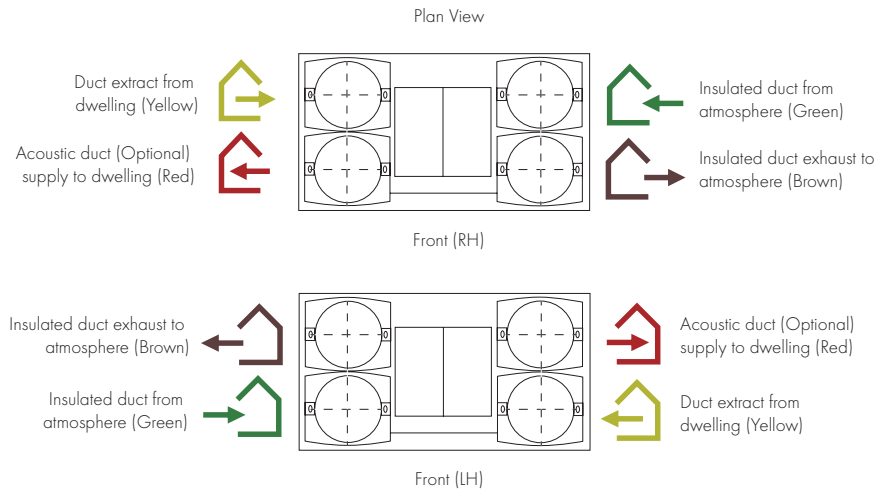


## Electrical Connection

Please note: Electrical connection should be carried out by an appropriately qualified person and in accordance with current wiring regulations.

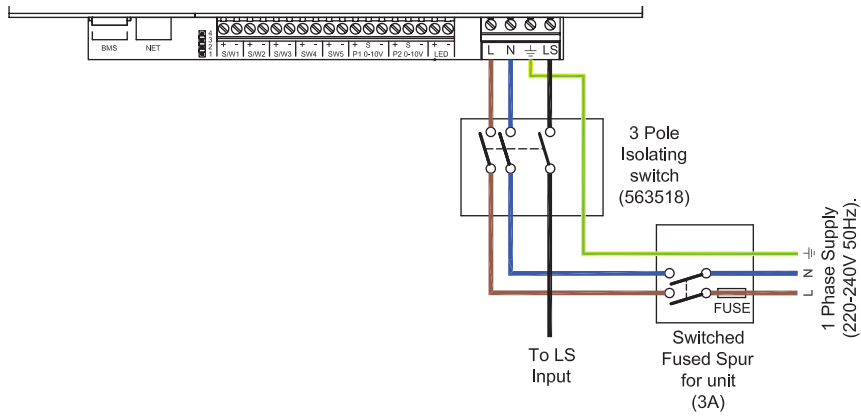

## Trickle to Boost by Trickle/Boost Switch

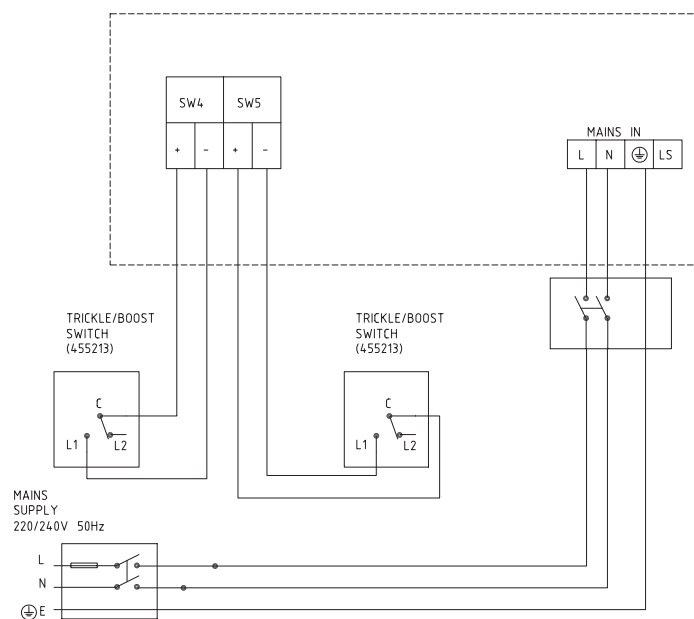



# Lo-Carbon Sentinel Kinetic<sup>®</sup> FH

- Acoustic Enclosure option for reduced breakout noise
- Acoustic Top Box option for reduced in-duct noise
- Lightweight for easier installation
- Horizontal duct option for space-saving installations
- Integrated digital controller for simple and accurate commissioning
- Plug and play controls; Humidistat
- BMS connectivity
- LS inputs (Light Switch)
- Volt-free inputs
- Self diagnosis for simplified fault finding
- Adjustable delay On/delay Off timer



## Easy Installation

The Sentinel Kinetic models can be mounted vertically in a roof space or in an appropriate cupboard within the dwelling. When mounted in an unheated area the ducting and unit must be insulated in accordance with the Domestic Ventilation Compliance Guide. Ducting can be attached to the unit horizontally, vertically or both.

For scenarios where noise is a critical issue, an Acoustic Enclosure is available to reduce breakout noise and the Acoustic Top Box will reduce in-duct noise at key frequencies.

**Left (L) or right (R) hand installation.** Left hand and right hand units are available.

## Spigot Options

The combination of spigot options allows installation in confined locations. If vertical and horizontal connection is required on the same outlet/inlet, additional spigots can be supplied.

The condensate drain can be taken out through the back, side or bottom of the unit. Using the fittings supplied, the final condensate connection is made outside the unit and can be completed after installation.

## Integral Humidity Sensor

The integral humidity sensor increases speed in proportion to relative humidity levels, saving energy and reducing noise. The sensor also reacts to small but rapid increases in humidity, even if the normal trigger threshold is not reached. This unique feature ensures adequate ventilation, even for the smallest wet room. The night time relative humidity setback feature suppresses nuisance tripping as humidity gradually increases with falling temperature.

## Model

Model	Stock Ref
Sentinel Kinetic FH Right	408167
Sentinel Kinetic FH Right with Acoustic Top Box & Enclosure	479532
Sentinel Kinetic FH Right with Acoustic Top Box	479531
Sentinel Kinetic FH Right with Acoustic Enclosure	479530
Sentinel Kinetic FH Left	408169
Sentinel Kinetic FH Left with Acoustic Top Box & Enclosure	479535
Sentinel Kinetic FH Left with Acoustic Top Box	479534
Sentinel Kinetic FH Left with Acoustic Enclosure	479533

(FH comes with summer bypass & humidity sensor)

## Accessories

Model	Stock Ref
Wired Remote Controller	443283
LED alarm with 15m cable	448356
ISO 45% Coarse (G3) 2x Filter	409764
ISO ePM10 50% Pollen (M5) 2x Filter	472153
Anti Vibration Mounts	68MP033G
Acoustic Purge Fan	477988
Acoustic Purge Fan XL	479829

## SAP PCDB performance (Model 408167A)


	SAP 2009		SAP 2012	
	Thermal Efficiency %	SFP (W/l/s)	Thermal Efficiency %	SFP (W/l/s)
K+1	90	0.46	89	0.47
K+2	89	0.45	88	0.54
K+3	88	0.50	86	0.65
K+4	86	0.60	84	0.84
K+5	85	0.70	84	1.01

## SEC Class

Model	SEC Class
Kinetic FH/FHL	A+

## Dimensions (mm)

Unit

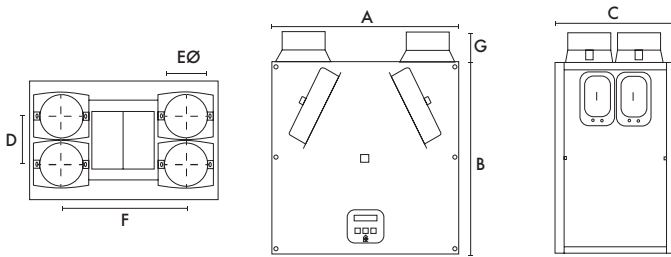


A	B	C	D	EØ	F	G
555	550	350	140	125	360	90


Weight: 18kg

## Acoustic Solution


Top



Front



Side




Acoustic Acoustic  
Top Box Enclosure

A	B	C	D	E	F	G	kg	kg	Spigot
80	633	501	75	626	447	45	11	19	125

## Performance

Fan speeds are fully adjustable within the performance range.

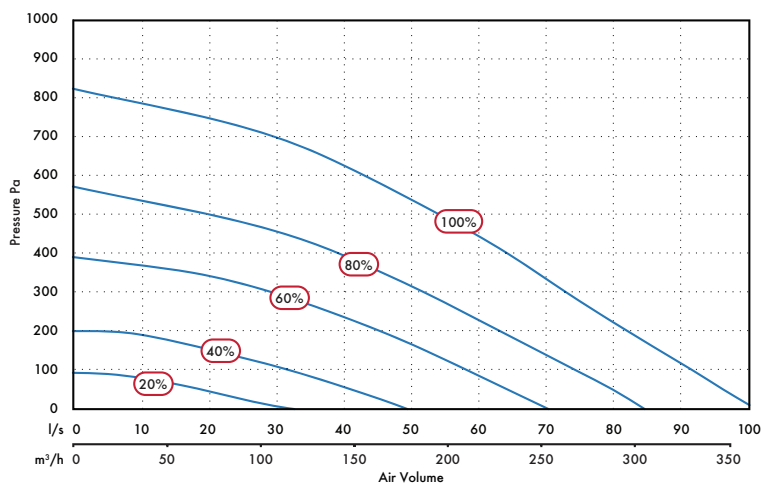

## Sound Data (Unit only)

Speed Test mode	Port	Octave band, Hz, dB SWL								SPL dB(A) @ 3m	
		63	125	250	500	1k	2k	4k	8k		LwA
20%	Supply	66.2	67.2	54.3	48.0	42.1	33.3	22.5	25.6	53.9	36.4
	Extract	57.7	56.6	47.2	43.5	35.3	24.1	19.6	25.7	45.7	28.2
	Breakout	41.2	47.0	41.7	39.5	34.6	30.4	22.5	25.7	41.0	20.5
40%	Supply	68.9	66.4	68.8	57.8	52.1	44.9	35.3	28.8	62.4	44.9
	Extract	66.8	56.1	56.9	52.1	44.7	34.6	23.8	25.8	53.2	35.7
	Breakout	47.3	47.5	56.4	48.0	44.0	39.6	32.8	29.1	51.0	30.5
60%	Supply	72.8	72.5	82.2	64.4	59.9	53.8	46.2	40.3	74.4	56.9
	Extract	67.3	61.9	66.5	58.9	52.2	42.7	32.6	27.6	61.1	43.6
	Breakout	53.9	53.2	65.9	55.8	52.2	48.2	42.5	39.3	61.0	40.5
80%	Supply	85.0	75.3	72.5	77.9	65.3	58.8	52.1	47.4	76.0	58.5
	Extract	83.5	65.2	65.0	65.5	57.0	47.7	37.9	31.3	65.5	48.0
	Breakout	56.4	56.4	60.4	69.8	56.7	53.2	47.8	42.0	66.5	46.0
100%	Supply	95.5	77.7	74.0	80.4	68.7	62.9	56.9	52.4	79.1	61.6
	Extract	83.3	68.3	66.9	71.2	60.7	51.4	42.4	36.1	69.7	52.2
	Breakout	62.1	59.7	62.9	70.0	61.0	57.3	52.3	46.9	68.0	47.5

## Sound Data (Unit with Acoustic Solution)

Speed Test mode	Port	Octave band, Hz, dB SWL								SPL dB(A) @ 3m	
		63	125	250	500	1k	2k	4k	8k		LwA
20%	Supply	58.2	62.1	46.8	33.7	21.1	14.1	18.2	24.1	47.5	30.0
	Extract	55.9	48.3	37.1	26.8	17.7	14.5	18.0	23.7	36.2	18.7
	Breakout	41.8	45.1	38.7	29.1	18.4	13.7	17.8	23.5	34.7	14.2
40%	Supply	66.5	59.3	59.3	43.5	30.5	15.9	17.9	23.5	52.1	34.6
	Extract	57.4	49.7	50.9	36.2	23.5	15.0	18.1	23.7	43.5	26.0
	Breakout	47.1	47.6	49.8	38.4	30.2	21.0	18.5	23.6	42.6	22.1
60%	Supply	69.5	66.0	66.5	50.7	40.2	20.6	18.8	24.2	59.3	41.8
	Extract	62.4	57.1	53.7	43.2	32.5	19.5	18.5	23.8	48.0	30.5
	Breakout	51.8	54.5	54.4	45.2	38.9	32.1	24.4	24.0	49.0	28.5
80%	Supply	78.5	68.9	63.3	61.3	45.1	25.7	20.7	25.8	61.0	43.5
	Extract	74.2	59.8	55.8	49.9	37.8	24.4	20.5	23.9	52.4	34.9
	Breakout	57.6	57.6	56.4	52.0	43.7	38.0	31.6	25.6	52.2	31.7
100%	Supply	75.7	70.8	67.1	65.7	48.2	30.4	23.6	27.8	64.6	47.1
	Extract	75.6	62.9	59.5	53.1	42.2	29.4	24.3	24.7	55.7	38.2
	Breakout	64.3	59.8	60.3	56.8	47.1	42.2	36.9	28.8	56.4	35.9

Tested according to BS EN 13141-7:2010. Breakout quoted spherical. Supply and Extract quoted hemispherical. For in-duct data, end reflections are added based on the spigot size of the unit.

## Consultant's Specification

### Operation

The supply and extract ventilation unit shall be a Sentinel Kinetic as manufactured by Vent-Axia and shall be sized as indicated on the drawings and shall be in accordance with the particular specification.

Supply air to the room shall be pre-heated by the extract air via the integrated composite plastic counterflow heat recovery cell. The Sentinel Kinetic shall automatically vary the ventilation rate via EC/DC motors, as it receives signals from one of the optional interconnected sensors. When a signal is received, the fans shall either vary their speed proportionally or on a trickle and boost principle.

The unit shall have the facility to commission the supply and extract fans individually via in-built minimum and maximum speed adjustment, or alternative wired remote control unit. The fans themselves shall have independent, infinitely variable speed control.

### Unit Specification

The unit shall be manufactured with an ABS outer case construction, and incorporate a reversible core to allow for left or right hand mounting.

The unit shall have a high efficiency composite plastic counterflow heat exchanger, supply and extract filters, automatic summer bypass, integral minimum and maximum infinitely variable speed controls with fascia mounted failure indication. The unit shall have low energy, high efficiency EC/DC fan/motor assemblies with sealed for life bearings. The impellers shall be high efficiency backward curved centrifugal type.

The unit shall have a heat exchanger cell with a thermal efficiency of up to 90% when tested to EN 308. This shall be protected by ISO 45% Coarse (G3) grade synthetic filters on supply and extract. Complete with a condensate drip tray and drain connection.

To reduce breakout noise, the MVHR unit shall be provided with an Acoustic Enclosure of steel construction lined with class 'O' acoustic foam. To reduce in-duct noise, the top of the MVHR shall be fitted with an Acoustic Top Box to provide attenuation to the 4 ducts of the unit. This Acoustic Top Box shall be of steel construction lined with acoustic class 'O' foam with the MVHR spigots linked to the Top Box via 4 separate attenuated ducts. The acoustic enclosure and top box shall each be independently tested for noise to BS EN 13141-7.

The MVHR unit shall incorporate an Expanded Polystyrene (EPS) inner chassis with custom motor and impeller mounting features. The inner chassis will assist in reducing noise and act as a large anti-vibration mount avoiding transmission through to the back mounting plate or base of the unit.

The MVHR unit will be tested to ensure it meets the maximum allowable vibration of no more than 1 mm/s, measured on the unit wall fixing points.

The unit shall be constructed with a removable Core allowing full maintenance access. The removable Core shall provide access to the following:

- ✓ Supply and extract filter
- ✓ Heat exchanger
- ✓ Access to the electrical connections

Access shall be provided for wiring termination and setup/commissioning. The backlit LCD user interface therein shall be removable for remote mounting if required.

Units shall be as manufactured by Vent-Axia Ltd.


Acoustically tested to BS EN 13141-7

### Standard Controls

All Sentinel Kinetic units shall incorporate the following functions integrally mounted, pre-wired and factory fitted by the manufacturer:


- ✓ Integral infinitely variable fan speed control on supply and extract
- ✓ Integral min/max ventilation control/set point
- ✓ Integral BMS interfaces - control and status indication
- ✓ Heating interlocks
- ✓ 0-10V proportional speed adjustment
- ✓ Volt free contacts
- ✓ 24V sensor supply
- ✓ Integral on/off or trickle boost function from remote switch e.g. PIR occupancy detector
- ✓ The unit shall be controlled by the 'Sentinel' control devices (enablers and sensors) as detailed in the schedule or on the drawings
- ✓ Fully automatic summer bypass
- ✓ Switched Live input with adjustable 'delay-on' feature
- ✓ Fan failure or component failure indicated via individual fault code display
- ✓ Running time counter
- ✓ Control panel PIN number lock
- ✓ Automatic frost protection effective to -20°C
- ✓ Tool free filter access
- ✓ The unit shall incorporate ('H' models) an integral humidity sensor with the following features:
  - Ambient Response; Raises the humidity trigger point as dwelling temperature reduces
  - Rapid Response; Monitors the rate of change in humidity and triggers increased airflow even if the humidity trigger threshold is not reached
  - Proportional Response; Incrementally increases the fan speed to reduce noise and reduce energy consumption

## Airflow Direction

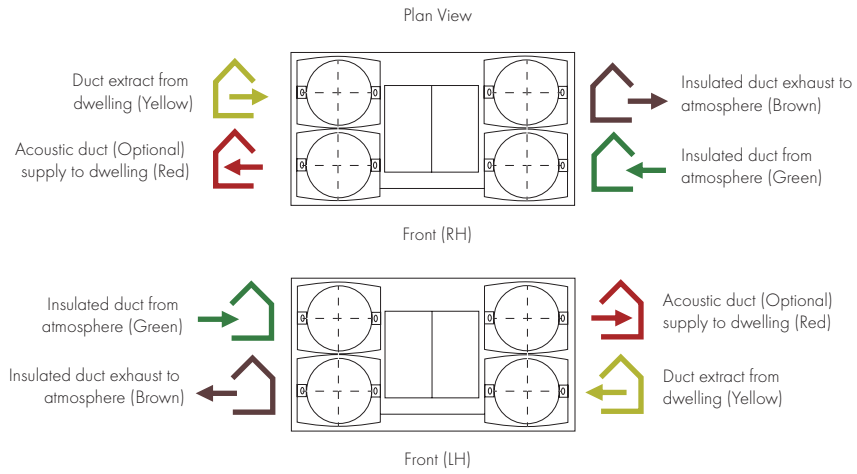


## Electrical Connection

Please note: Electrical connection should be carried out by an appropriately qualified person and in accordance with current wiring regulations.

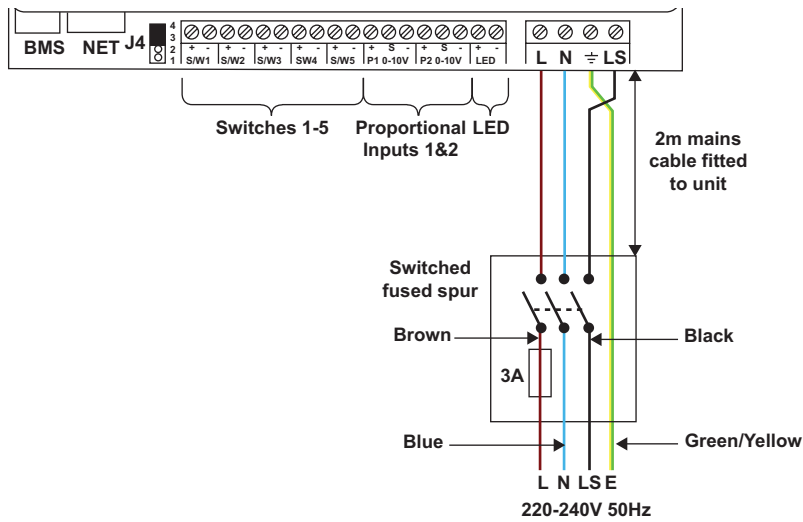

## Trickle to Boost by Trickle/Boost Switch

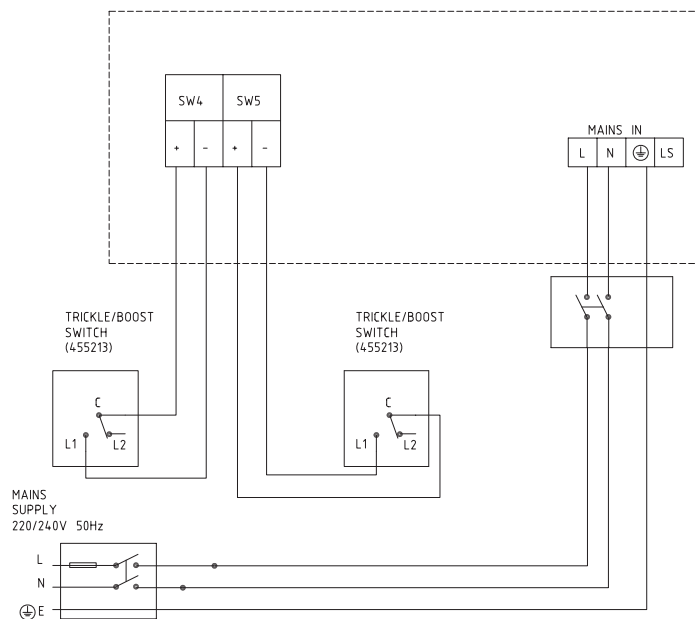

# Lo-Carbon Sentinel Kinetic<sup>®</sup> Plus

- Acoustic Enclosure option for reduced breakout noise
- Acoustic Top Box option for reduced in-duct noise
- Recognised in SAP PCDB
- Horizontal duct option for space-saving installations
- High airflow, ideal for student accommodation clusters
- Unique folding filter for removal when access is restricted
- Integrated digital controller for simple and accurate commissioning
- Plug and play controls; Humidistat
- BMS connectivity
- LS inputs (Light Switch)
- Volt-free inputs
- Self diagnosis for simplified fault finding
- Adjustable delay On/delay Off timer
- 4 fully adjustable speeds and a purge setting



## Increased Performance

The Sentinel Kinetic Plus benefits from the latest high efficiency, backward curved impeller design, ensuring the lowest possible energy consumption, ultra quiet operation and an exceptional performance range covering small one bed apartments to the largest of houses.

For scenarios where noise is a critical issue, an Acoustic Enclosure is available to reduce breakout noise and the Acoustic Top Box will reduce in-duct noise at key frequencies.

## Care Homes & Student Accommodation

The Sentinel Kinetic Plus is ideal for larger homes and multiple occupancy units such as care homes and student accommodation. Capable of 400m<sup>3</sup>/hr at 150Pa, the unit can extract from up to ten bathrooms and a communal kitchen while still achieving almost 90% heat recovery. The fully automatic capability of the Kinetic range means that adequate ventilation is always achieved.

The Kinetic's BMS capability is also ideal for those commercial applications where landlords or property managers want to monitor and optimise building performance and maintenance. The Kinetic BMS can provide status information and its self diagnostics can report if any fault is found.

## Spigot Options

Spigots may be re-positioned to give horizontal connection or a combination of vertical and horizontal connection.

Optional 180mm/200mm spigots can simplify connection in commercial installations where larger diameter duct work has been used.

## Quick Change Filter

As many systems are placed within cupboards the unique filter design folds as you remove it to ensure easy access in restricted spaces.

## Integral Humidity Sensor

The integral humidity sensor increases speed in proportion to relative humidity levels, saving energy and reducing noise. The sensor also reacts to small but rapid increases in humidity, even if the normal trigger threshold is not reached. This unique feature ensures adequate ventilation, even for the smallest wet room. The night time relative humidity setback feature suppresses nuisance tripping as humidity gradually increases with falling temperature.

## Models

Model	Stock Ref
Sentinel Kinetic Plus BS	447938
Sentinel Kinetic Plus Right	443028
Sentinel Kinetic Plus Right with Acoustic Top Box & Enclosure	479538
Sentinel Kinetic Plus Right with Acoustic Top Box	479537
Sentinel Kinetic Plus Right with Acoustic Enclosure	479536
Sentinel Kinetic Plus Left	443028L
Sentinel Kinetic Plus Left with Acoustic Top Box & Enclosure	479541
Sentinel Kinetic Plus Left with Acoustic Top Box	479540
Sentinel Kinetic Plus Left with Acoustic Enclosure	479539

## Accessories

Model	Stock Ref
Wired Remote Controller	443283
LED Alarm with 15m cable	448356
Opto-coupler for volt-free BMS connection	447340
ISO 45% Coarse (G3) 2x Filter	403702
ISO ePM10 50% Pollen (M5) 1x Filter	444201
180mm/200mm Spigot Kit (One per pack)	446523
Anti Vibration Mounts	68MP033G
Acoustic Purge Fan	477988
Acoustic Purge Fan XL	479829

## SAP PCDB Test Results (Kinetic Plus BS)


	SAP 2009		SAP 2012	
	Thermal Efficiency %	SFP (W/l/s)	Thermal Efficiency %	SFP (W/l/s)
K+1	91	0.51	91	0.42
K+2	91	0.40	91	0.44
K+3	90	0.41	90	0.52
K+4	90	0.45	90	0.63
K+5	90	0.53	90	0.76
K+6	90	0.60	91	0.90
K+7	90	0.70	91	1.05

## SEC Class

Model	SEC Class
Kinetic Plus	A+

## Dimensions (mm)

Unit

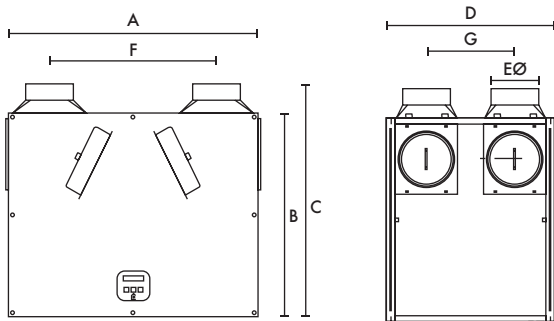


A	B	C	D	EØ	F	G
785	635	722	550	150	520	275


Weight: 24kg

## Performance

Fan speeds are fully adjustable within the performance range.

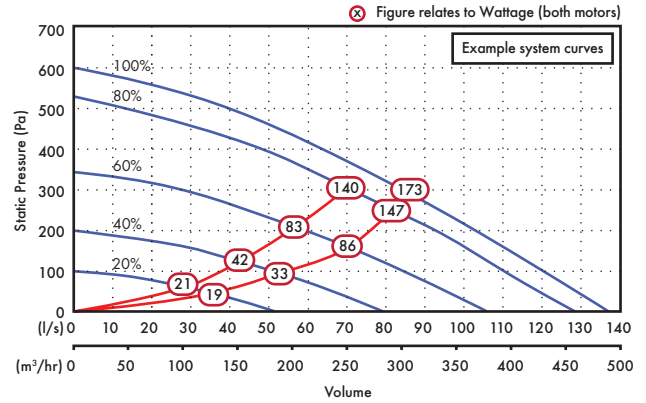

## Acoustic Solution

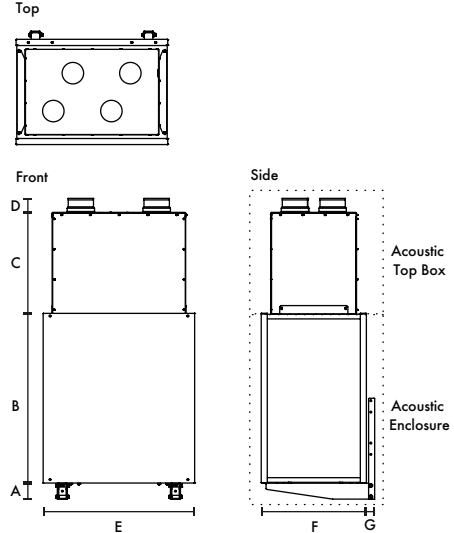

A	B	C	D	E	F	G	kg	kg	Spigot
80	733	501	71	855	583	40	17	33	150

## Sound Data (Unit only)

Unit setting	Test mode	Octave band, Hz, dB SWL										SPL dB(A) at 3m
		63	125	250	500	1k	2k	4k	8k	LwA		
20%	Supply	54.4	60.9	50.6	45.9	34.3	23.6	19.1	24.5	51.3	30.8	
	Extract	48.4	56.7	43.7	35.9	21.4	16	18.7	24.5	42.3	24.8	
	Breakout	42.6	40.2	39.6	38	31.1	24.3	19.4	24.6	35.1	17.6	
40%	Supply	61.6	64.6	58.4	55.5	45.9	37.2	24.7	25.1	58.8	38.3	
	Extract	54.9	62.2	51.5	44.8	32.1	24.1	19.7	24.6	48.8	31.3	
	Breakout	51.1	49.3	48.9	45.9	41.3	35.7	26.7	25.6	44.0	26.5	
60%	Supply	67.5	67.5	73.2	62.4	53.4	47.5	33.5	28.3	69.2	48.7	
	Extract	62.5	61.7	60.1	51.1	39.2	32.1	23.2	24.8	54.0	36.5	
	Breakout	54.9	53	58.4	55.1	49.7	43.9	35.4	31.9	52.8	35.3	
80%	Supply	70.5	71.1	73.8	66.5	58.3	53.2	39.7	33.3	71.3	50.8	
	Extract	68.4	65.9	71.8	55.6	43.6	37.1	27.3	25.5	63.8	46.3	
	Breakout	59.2	56.8	63.6	57.3	54.2	49	41	37.5	56.8	39.3	
100%	Supply	72.8	73.1	75.2	70.4	61.6	56.6	44.2	37.6	73.9	53.4	
	Extract	71.7	69	71.8	57.4	45.7	39.9	30.9	26.6	64.1	46.6	
	Breakout	61.2	58.8	67.9	59.6	56.7	52.2	44.4	41.2	60.1	42.6	

## Sound Data (Unit with Acoustic Solution)

Unit setting	Test mode	Octave band, Hz, dB SWL										SPL dB(A) at 3m
		63	125	250	500	1k	2k	4k	8k	LwA		
20%	Supply	55.7	49.2	36.6	23.6	17.4	14.9	17.8	23.3	36.1	18.6	
	Extract	51.4	42.4	30.3	20.9	16.8	14.9	17.8	23.3	30.8	13.3	
	Breakout	37.4	39.7	30.0	22.7	15.6	14.0	17.9	23.3	28.4	7.9	
40%	Supply	59.7	59.7	45.5	32.2	22.2	15.2	17.9	23.3	45.1	27.6	
	Extract	54.8	55.0	38.0	26.8	18.1	14.9	17.8	23.3	40.2	22.7	
	Breakout	45.7	48.5	39.9	32.8	24.2	17.5	18.0	23.4	36.8	16.3	
60%	Supply	66.1	61.9	53.6	41.0	29.8	18.3	18.0	23.3	49.5	32.0	
	Extract	60.6	55.9	48.4	34.9	23.8	16.3	17.9	23.3	43.8	26.3	
	Breakout	51.1	51.0	52.4	40.9	33.2	26.1	19.7	23.4	44.5	24.0	
80%	Supply	70.0	67.6	68.5	48.1	37.9	25.3	19.4	23.6	60.7	43.2	
	Extract	65.4	59.7	57.2	41.6	31.3	21.8	19.2	23.4	50.4	32.9	
	Breakout	55.6	55.6	57.9	47.9	40.4	34.3	26.1	23.7	51.3	30.8	
100%	Supply	72.1	70.1	66.4	51.6	41.9	29.7	21.7	24.0	60.0	42.5	
	Extract	68.2	62.4	60.6	45.5	36.0	26.6	21.7	23.6	53.8	36.3	
	Breakout	57.6	58.8	63.3	51.0	44.2	38.5	31.0	24.9	56.3	35.8	

Tested according to BS EN 13141-7:2010. Breakout quoted spherical. Supply and Extract quoted hemispherical. For in-duct data, end reflections are added based on the spigot size of the



## Consultant's Specification

### Operation

The supply and extract ventilation unit shall be as Sentinel Kinetic Plus as manufactured by Vent-Axia and shall be sized as indicated on the drawings and shall be in accordance with the particular specification.

Supply air to the room shall be pre-heated by the extract air via the integrated composite plastic counterflow heat recovery cell. The Sentinel Kinetic Plus shall automatically vary the ventilation rate via EC/DC motors, as it receives signals from one of the optional interconnected sensors.

When a signal is received, the fans shall either vary their speed proportionally or on a trickle and boost principle.

The unit shall have the facility to commission the supply and extract fans individually via in-built minimum and maximum speed adjustment, or alternative wired remote control unit. The fans themselves shall have independent, infinitely variable speed control.

### Unit Specification

The unit shall be manufactured with an ABS outer case construction, and incorporate a reversible core to allow for left or right hand mounting.

The unit shall have a high efficiency composite plastic counterflow heat exchanger, supply and extract filters, automatic summer bypass, integral minimum and maximum infinitely variable speed controls with fascia mounted failure indication.

The unit shall have low energy, high efficiency EC/DC fan/motor assemblies with sealed for life bearings. The impellers shall be high efficiency backward curved centrifugal type.

The unit shall have a heat exchanger cell with a thermal efficiency of up to 92% when tested to EN 308. This shall be protected by ISO 45% Coarse (G3) grade synthetic filters on supply and extract. Complete with a condensate drip tray and drain connection.

To reduce breakout noise, the MVHR unit shall be provided with an Acoustic Enclosure of steel construction lined with class '0' acoustic foam. To reduce in-duct noise, the top of the MVHR shall be fitted with an Acoustic Top Box to provide attenuation to the 4 ducts of the unit. This Acoustic Top Box shall be of steel construction lined with acoustic class '0' foam with the MVHR spigots linked to the Top Box via 4 separate attenuated ducts. The acoustic enclosure and top box shall each be independently tested for noise to BS EN 13141-7.

The unit shall be constructed with a removable Core allowing full maintenance access. The removable Core shall provide access to the following:

- ✓ Supply and extract filter
- ✓ Heat exchanger
- ✓ Access to the electrical connections

Access shall be provided for wiring termination and setup/commissioning. The backlit LCD user interface therein may be duplicated for remote mounting if required.

Units shall be as manufactured by Vent-Axia Ltd.

The MVHR unit shall incorporate an Expanded Polystyrene (EPS) inner chassis with custom motor and impeller mounting features. The inner chassis will assist in reducing noise and act as a large anti-vibration mount to avoid transmission through to the back mounting plate or the base of the unit.

The MVHR unit shall be tested to ensure it meets the maximum allowable vibration of no more than 1 mm/s, measured on the unit wall fixing points.


Sound tested to BS EN 13141-7:2010

### Standard Controls


All Sentinel Kinetic units shall incorporate the following functions integrally mounted, pre-wired and factory fitted by the manufacturer:

- ✓ Integral infinitely variable fan speed control on supply and extract
- ✓ Integral min/max ventilation control/set point
- ✓ Integral BMS input/output interfaces - control and status indication
- ✓ Heating interlocks
- ✓ 0-10V proportional speed adjustment
- ✓ Volt free contacts
- ✓ 24V sensor supply
- ✓ Integral on/off or trickle boost function from remote switch, e.g. PIR occupancy detector
- ✓ Fully automatic summer bypass
- ✓ Switched Live input with adjustable 'delay-on' feature
- ✓ Fan failure or component failure indicated via individual fault code display
- ✓ Running time counter
- ✓ Control panel PIN number lock
- ✓ Automatic frost protection effective to -20°C
- ✓ The unit shall incorporate an integral humidity sensor with the following features:
  - Ambient Response; Raises the humidity trigger point as dwelling temperature reduces
  - Rapid Response: Monitors the rate of change in humidity and triggers increased airflow even if the humidity trigger threshold is not reached
  - Proportional Response; Incrementally increases the fan speed to reduce noise and reduce energy consumption
- ✓ The unit shall be controlled by the 'Sentinel' control devices (enablers and sensors) as detailed in the schedule or on the drawings.
- ✓ Tool free filter access

### Mounting Option




## Airflow Direction

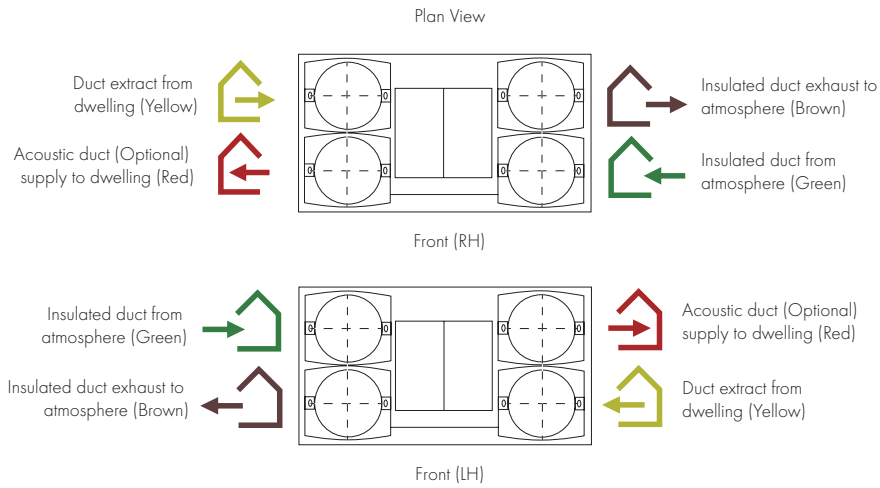


## Electrical Connection

Please note: Electrical connection should be carried out by an appropriately qualified person and in accordance with current wiring regulations.

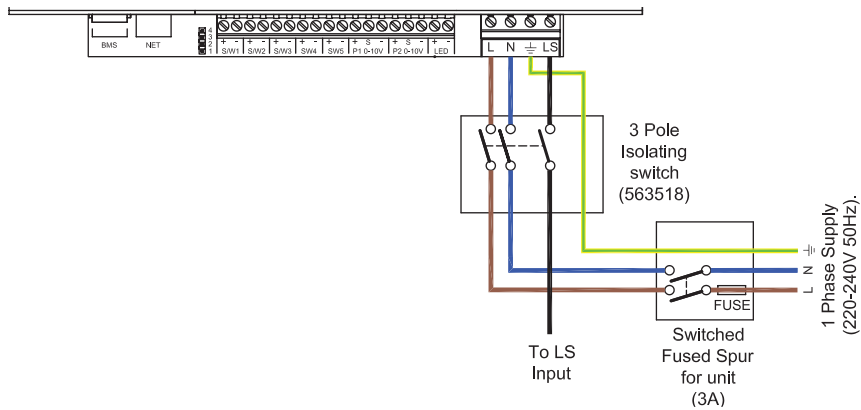

## Trickle to Boost by two lighting circuits or Trickle/Boost Switch

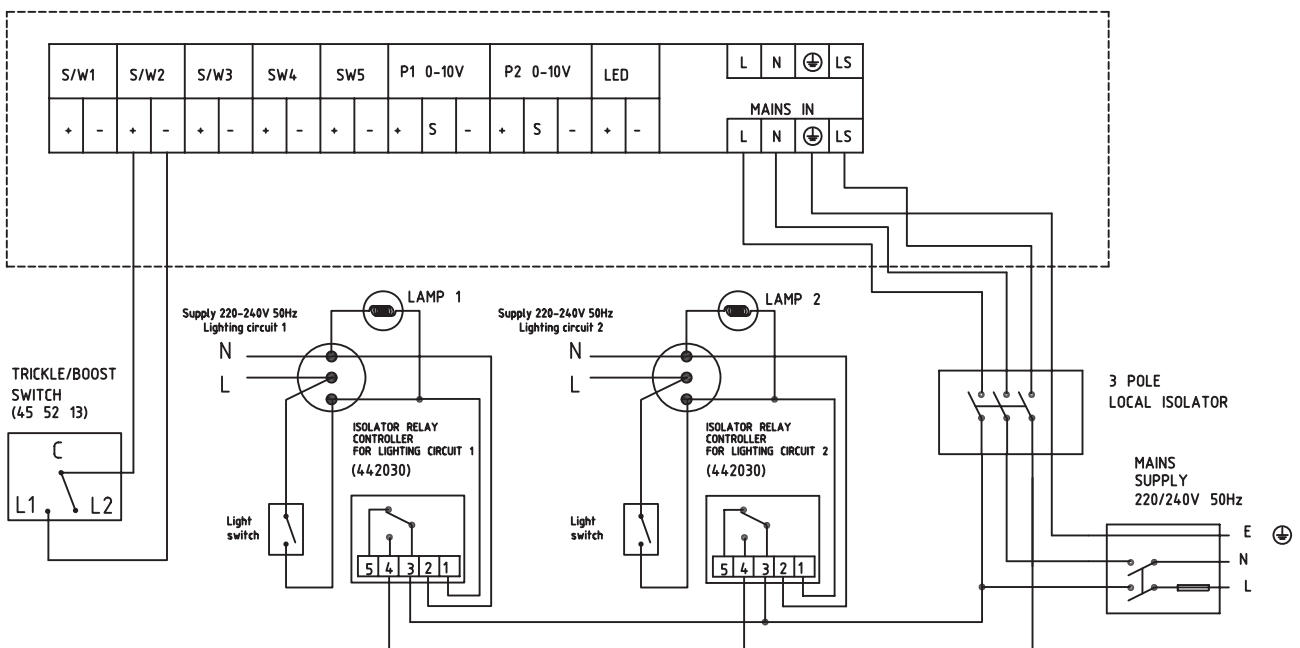

# Lo-Carbon Sentinel Kinetic<sup>®</sup> High Flow

- Acoustic Enclosure option for reduced breakout noise
- Acoustic Top Box option for reduced in-duct noise
- Recognised in SAP PCDB
- 180mm/200mm spigots
- Horizontal duct option for space-saving installations
- High airflow, ideal for student accommodation clusters
- Unique folding filter for removal when access is restricted
- Integrated digital controller for simple and accurate commissioning
- Plug and play controls; Humidistat
- BMS connectivity
- LS inputs (Light Switch)
- Volt-free inputs



## Increased Performance

The Sentinel Kinetic High Flow benefits from the latest high efficiency, backward curved impeller design, ensuring the lowest possible energy consumption, and an exceptional performance range covering small one bed apartments to the largest of houses.

For scenarios where noise is a critical issue, an Acoustic Enclosure is available to reduce breakout noise and the Acoustic Top Box will reduce in-duct noise at key frequencies.

## Care Homes & Student Accommodation

The Sentinel Kinetic High Flow is ideal for larger homes and multiple occupancy units such as care homes and student accommodation. Capable of 175l/s at 150Pa, the unit can extract from up to fourteen bathrooms and a communal kitchen while still achieving almost 90% heat recovery. The fully automatic capability of the Kinetic range means that adequate ventilation is always achieved.

The Kinetic's BMS capability is also ideal for those commercial applications where landlords or property managers want to monitor and optimise building performance and maintenance. The Kinetic BMS can provide status information and its self diagnostics can report if any fault is found.

## Spigot Options

180mm/200mm Spigots may be re-positioned to give horizontal connection or a combination of vertical and horizontal connection.

## Quick Change Filter

As many systems are placed within cupboards the unique filter design folds as you remove it to ensure easy access in restricted spaces.

## Integral Humidity Sensor

The integral humidity sensor increases speed in proportion to relative humidity levels, saving energy and reducing noise. The sensor also reacts to small but rapid increases in humidity, even if the normal trigger threshold is not reached. This unique feature ensures adequate ventilation, even for the smallest wet room. The night time relative humidity setback feature suppresses nuisance tripping as humidity gradually increases with falling temperature.

## Models

Model	Stock Ref
Kinetic High Flow Right	408449
Kinetic High Flow Right with Acoustic Top Box & Enclosure	479544
Kinetic High Flow Right with Acoustic Top Box	479543
Kinetic High Flow Right with Acoustic Enclosure	479542
Kinetic High Flow Left	408451
Kinetic High Flow Left with Acoustic Top Box & Enclosure	479547
Kinetic High Flow Left with Acoustic Top Box	479546
Kinetic High Flow Left with Acoustic Enclosure	479545

For further details, see Sentinel Kinetic Plus.

## Accessories

Model	Stock Ref
Wired Remote Controller	443283
LED Alarm with 15m cable	448356
Opto-coupler for volt-free bms connection	447340
ISO 45% Coarse (G3) 2x Filter	403702
ISO ePM10 50% Pollen (M5) 1x Filter	444201
Anti Vibration Mounts	68MP033G
Acoustic Purge Fan	477988
Acoustic Purge Fan XL	479829

## SAP PCDB Test Results


	SAP 2009		SAP 2012	
	Thermal Efficiency %	SFP (W/l/s)	Thermal Efficiency %	SFP (W/l/s)
K + 1	88	0.65	88	0.58
K + 2	88	0.54	90	0.55
K + 3	90	0.52	91	0.60
K + 4	90	0.55	91	0.69
K + 5	91	0.6	90	0.78
K + 6	91	0.66	90	0.92
K + 7	90	0.74	90	1.09

## SEC Rating

Model	SEC Class
Kinetic High Flow	A

## Dimensions (mm)

Unit

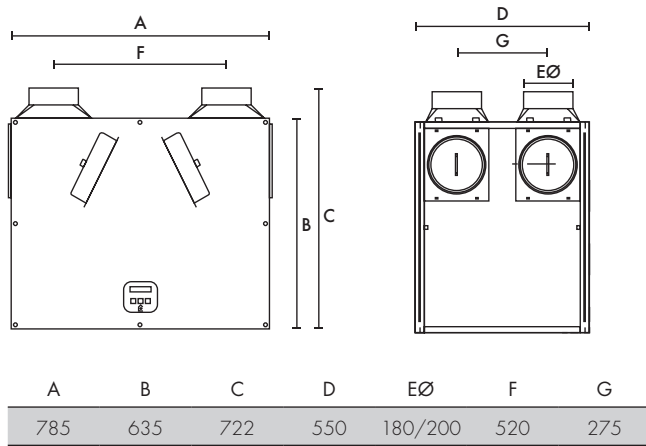


Weight: 31 kg

## Sound Data (Unit only)


Flow %	Test Mode	Octave band, Hz, dB SWL									SPL dB(A) @ 3m
		63	125	250	500	1K	2K	4K	8K	LwA	
20	Supply	55.1	65.9	55.2	53.8	44.4	37.4	25.3	24.9	66.8	34.1
	Extract	58.2	57.4	48.0	45.6	43.8	34.5	20.0	24.5	61.3	27.9
	Breakout	43.3	46.6	44.9	44.7	41.8	30.4	21.6	22.5	51.6	25.1
40	Supply	63.1	69.0	67.1	64.0	55.0	51.6	39.7	32.4	64.2	43.7
	Extract	58.6	58.4	60.0	53.7	41.9	41.5	31.7	25.1	54.9	34.3
	Breakout	55.4	49.6	60.6	53.8	46.5	41.5	33.2	27.4	55.4	34.8
60	Supply	70.3	74.3	81.4	71.5	63.6	59.9	49.6	43.1	74.8	54.3
	Extract	64.4	64.2	72.6	59.1	48.7	45.7	37.8	29.3	64.9	44.4
	Breakout	62.8	54.6	65.7	57.2	55.5	49.2	41.4	36.4	61.0	40.5
80	Supply	75.3	77.9	88.1	78.7	68.4	65.1	56.0	50.1	81.4	60.9
	Extract	71.1	68.2	73.6	61.8	51.9	49.5	42.7	37.6	66.4	45.9
	Breakout	66.2	59.0	73.4	61.8	57.0	54.6	47.3	43.1	66.8	46.2
100	Supply	90.9	80.9	84.4	80.1	71.5	68.0	59.3	54.5	80.7	60.1
	Extract	92.4	71.8	78.1	67.4	54.9	51.5	44.6	41.4	72.2	51.7
	Breakout	69.3	62.9	74.9	67.5	59.2	56.6	49.1	44.7	69.3	48.8

Tested according to BS EN 13141-7:2010. Breakout quoted spherical. Supply and Extract quoted hemispherical.

## Performance

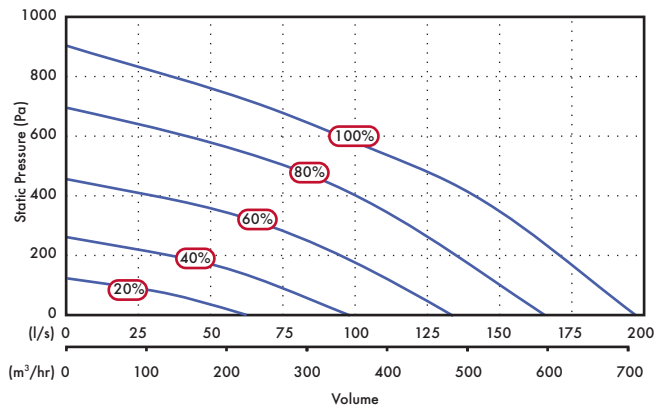

## Acoustic Solution

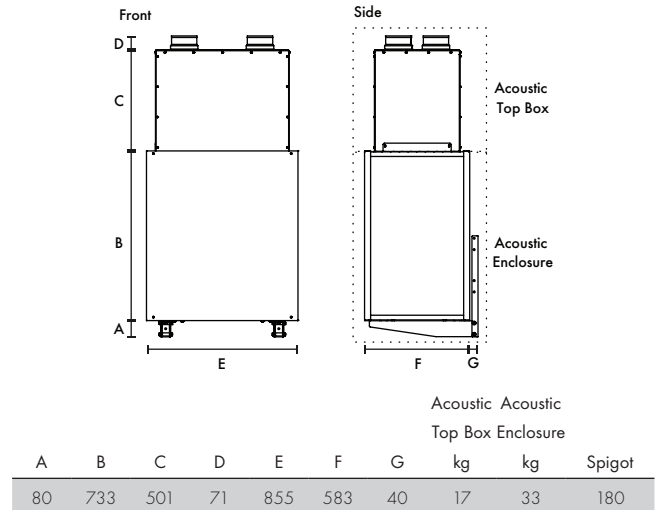

## Sound Data (Unit with Acoustic Enclosure)

Flow %	Test Mode	Octave band, Hz, dB SWL									SPL dB(A) @ 3m
		63	125	250	500	1K	2K	4K	8K	LwA	
20	Supply	55.2	57.0	46.1	38.8	24.0	15.4	18.0	23.2	43.6	26.1
	Extract	50.4	53.6	37.0	32.3	18.2	15.1	18.0	23.2	38.7	21.2
	Breakout	41.3	51.8	39.2	32.3	20.5	15.8	18.1	23.2	37.7	17.2
40	Supply	64.1	59.6	59.7	51.9	35.5	22.8	19.9	23.5	53.3	35.8
	Extract	56.6	50.7	49.0	41.9	24.5	17.7	18.1	23.2	43.3	25.8
	Breakout	46.7	50.5	53.0	44.8	32.2	22.2	18.5	23.3	45.6	25.1
60	Supply	67.3	64.0	67.7	58.6	43.2	30.6	26.5	25.9	61.0	43.5
	Extract	61.6	56.7	55.5	49.0	32.2	25.3	19.7	23.4	50.2	32.7
	Breakout	53.0	54.4	60.2	48.8	40.6	33.2	23.4	23.4	53.0	32.5
80	Supply	70.3	67.7	74.6	61.8	48.5	36.2	33.0	31.4	67.5	50.0
	Extract	66.7	60.0	67.2	50.9	38.1	32.8	24.0	24.1	59.7	42.2
	Breakout	58.0	58.0	64.7	52.4	45.7	39.9	31.2	24.3	58.7	38.2
100	Supply	73.0	70.1	77.1	65.1	51.4	39.5	37.0	36.4	70.1	52.6
	Extract	69.6	62.5	67.3	56.2	41.7	37.0	28.1	25.3	60.5	43.0
	Breakout	61.0	61.2	65.9	57.7	48.5	43.8	36.3	26.3	60.7	40.2

## Consultant's Specification

### Operation

The supply and extract ventilation unit shall be as Sentinel Kinetic High Flow as manufactured by Vent-Axia and shall be sized as indicated on the drawings and shall be in accordance with the particular specification.

Supply air to the room shall be pre-heated by the extract air via the integrated composite plastic counterflow heat recovery cell. The Sentinel Kinetic High Flow shall automatically vary the ventilation rate via EC/DC motors, as it receives signals from one of the optional interconnected sensors.

When a signal is received, the fans shall either vary their speed proportionally or on a trickle and boost principle.

The unit shall have the facility to commission the supply and extract fans individually via in-built minimum and maximum speed adjustment, or alternative wired remote control unit. The fans themselves shall have independent, infinitely variable speed control.

### Unit Specification

The unit shall be manufactured with an ABS outer case construction, and incorporate a reversible core to allow for left or right hand mounting.

The unit shall have a high efficiency composite plastic counterflow heat exchanger, supply and extract filters, automatic summer bypass, integral minimum and maximum infinitely variable speed controls with fascia mounted failure indication.

The unit shall have low energy, high efficiency EC/DC fan/motor assemblies with sealed for life bearings. The impellers shall be high efficiency backward curved centrifugal type.

The unit shall have a heat exchanger cell with a thermal efficiency of up to 92% when tested to EN 308. This shall be protected by ISO 45% Coarse (G3) grade synthetic filters on supply and extract. Complete with a condensate drip tray and drain connection.

To reduce breakout noise, the MVHR unit shall be provided with an Acoustic Enclosure of steel construction lined with class 'O' acoustic foam. To reduce in-duct noise, the top of the MVHR shall be fitted with an Acoustic Top Box to provide attenuation to the 4 ducts of the unit. This Acoustic Top Box shall be of steel construction lined with acoustic class 'O' foam with the MVHR spigots linked to the Top Box via 4 separate attenuated ducts. The acoustic enclosure and top box shall each be independently tested for noise to BS EN 13141-7.

The unit shall be constructed with a removable Core allowing full maintenance access. The removable Core shall provide access to the following:

- ✓ Supply and extract filter
- ✓ Heat exchanger
- ✓ Access to the electrical connections

Access shall be provided for wiring termination and setup/commissioning. The backlit LCD user interface therein may be duplicated for remote mounting if required.

Units shall be as manufactured by Vent-Axia Ltd.

The MVHR unit shall incorporate an Expanded Polystyrene (EPS) inner chassis with custom motor and impeller mounting features. The inner chassis will assist in reducing noise and act as a large anti-vibration mount to avoid transmission through to the back mounting plate or the base of the unit.

The MVHR unit shall be tested to ensure it meets the maximum allowable vibration of no more than 1 mm/s, measured on the unit wall fixing points.


Sound tested to BS EN 13141-7:2010

### Standard Controls


All Sentinel Kinetic units shall incorporate the following functions integrally mounted, pre-wired and factory fitted by the manufacturer:

- ✓ Integral infinitely variable fan speed control on supply and extract
- ✓ Integral min/max ventilation control/set point
- ✓ Integral BMS input/output interfaces - control and status indication
- ✓ Heating interlocks
- ✓ 0-10V proportional speed adjustment
- ✓ Volt free contacts
- ✓ 24V sensor supply
- ✓ Integral on/off or trickle boost function from remote switch, e.g. PIR occupancy detector
- ✓ Fully automatic summer bypass
- ✓ Switched Live input with adjustable 'delay-on' feature
- ✓ Fan failure or component failure indicated via individual fault code display
- ✓ Running time counter
- ✓ Control panel PIN number lock
- ✓ Automatic frost protection effective to -20°C
- ✓ The unit shall incorporate an integral humidity sensor with the following features:
  - Ambient Response; Raises the humidity trigger point as dwelling temperature reduces
  - Rapid Response: Monitors the rate of change in humidity and triggers increased airflow even if the humidity trigger threshold is not reached
  - Proportional Response; Incrementally increases the fan speed to reduce noise and reduce energy consumption
- ✓ The unit shall be controlled by the 'Sentinel' control devices (enablers and sensors) as detailed in the schedule or on the drawings.
- ✓ Tool free filter access

### Mounting Option




## Airflow Direction

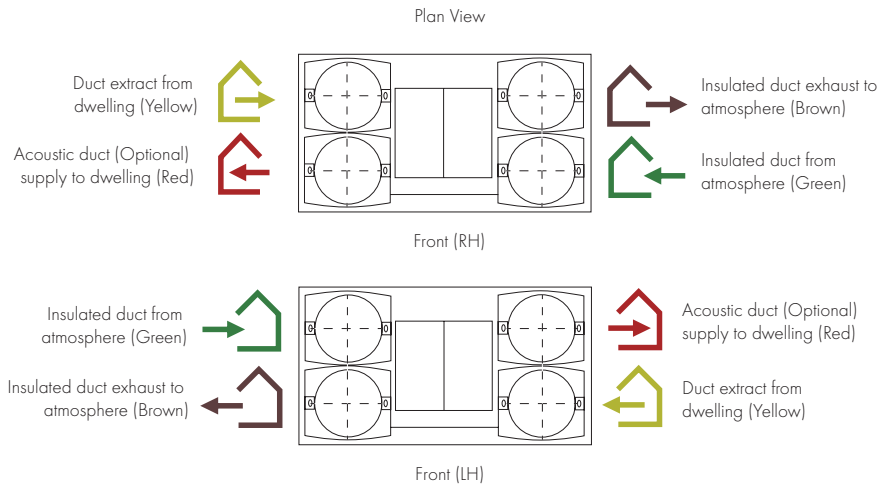


## Electrical Connection

Please note: Electrical connection should be carried out by an appropriately qualified person and in accordance with current wiring regulations.

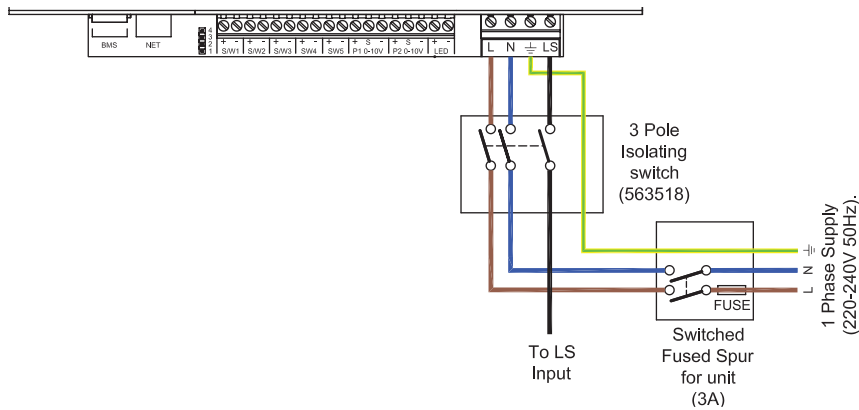

## Trickle to Boost by two lighting circuits or Trickle/Boost Switch

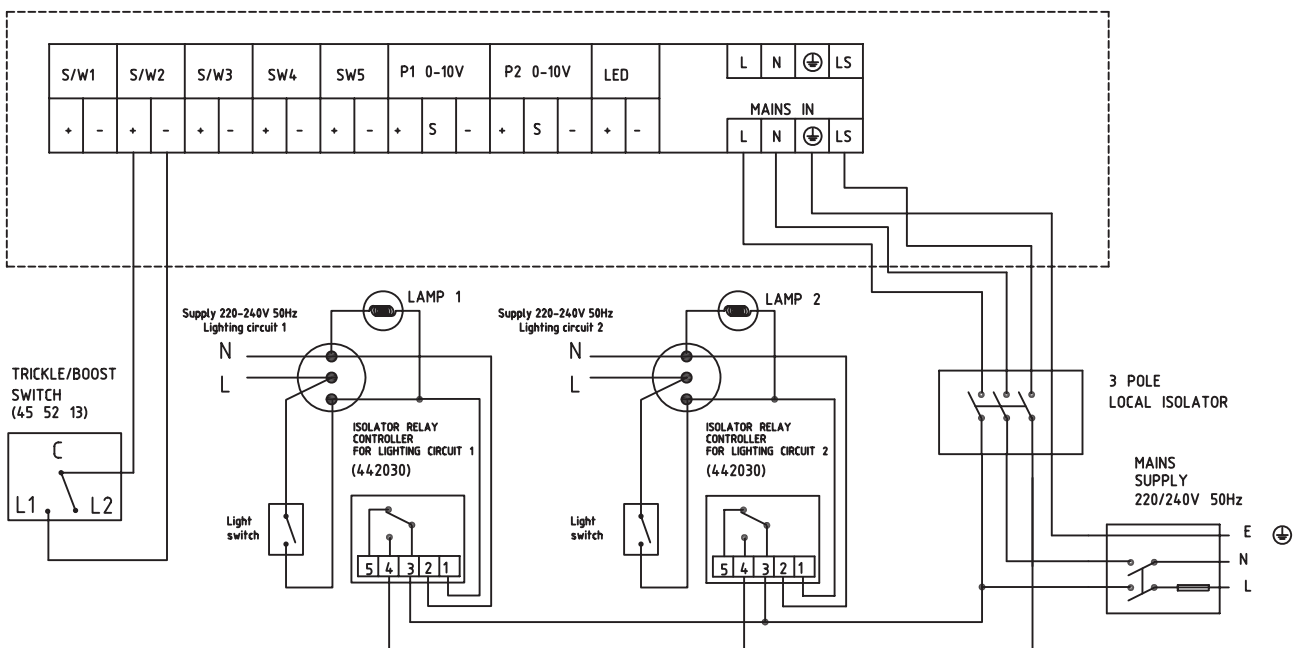



# Lo-Carbon Sentinel Kinetic<sup>®</sup> Cooker Hood SELV

- Acoustic Top Box option for reduced in-duct noise
- Recognised in SAP PCDB
- Includes Cooker Hood Canopy
- Fits within a 600mm wide aperture (300mm deep)
- Integrated digital controller for simple and accurate commissioning
- Plug and play controls; Humidistat
- BMS connectivity
- Volt-free inputs
- Self diagnosis for simplified fault finding
- Adjustable delay On/delay Off timer
- The SELV cooker hood allows the distance between the hood and an electric hob to be reduced from 650mm to 550mm.



## Easy Installation

Ducting can be attached to the unit horizontally, vertically or both. Minimum internal depth of kitchen cupboard: 300mm.

**Horizontal and Vertical Spigots:** The combination of spigot options allows installation in confined locations. If vertical and horizontal connection are required on the same outlet/inlet, additional spigots can be supplied.

The condensate connection can be taken through the rear of the unit or through the side of the unit into an adjacent cupboard prior to connection into pre-installed domestic waste water system.

## Cooker Hood Unit

The Sentinel Kinetic Cooker Hood is designed to fit in a 600mm wide aperture above a hob. The telescopic hood incorporates two flat removable metal grease filters, low energy light bulbs and is available with a White or Brushed Aluminium front trim.

The hood contains an integral fire damper in accordance with BRE Digest 398 and is connected to the heat recovery unit by a galvanised steel duct with access for cleaning. When the hood is opened, the heat recovery unit goes to boost speed and the summer bypass automatically opens to prevent cooking by-products entering the heat recovery cell. As an additional safety feature, the duct also contains a thermal cut-out fuse which turns off the MVHR unit in the event of excessive temperature in the airway. Cooker Hood units cannot be handed on-site and must be purchased as left hand (L) or right hand (R) models.

## SELV Models

SELV cooker hoods allow the distance between the hood and an electric hob to be reduced from 650mm to 550mm.

## Integral Humidity Sensor

The integral humidity (models with H suffix) sensor increases speed in proportion to relative humidity levels, saving energy and reducing noise. The sensor also reacts to small but rapid increases in humidity, even if

the normal trigger threshold is not reached. This unique feature ensures adequate ventilation, even for the smallest wet room. The night time relative humidity setback feature suppresses nuisance tripping as humidity gradually increases with falling temperature.

## Models

Lo-Carbon Sentinel Kinetic with summer bypass and humidity sensor.

Model	Stock Ref
Kinetic CWH L SELV (White Left)	477003
Kinetic CSH L SELV (Brushed Aluminium Left)	477004
Kinetic CWH R SELV (White Right)	477005
Kinetic CSH R SELV (Brushed Aluminium Right)	477006

## Accessories

Model	Stock Ref
Wired Remote Controller	443283
LED Alarm with 15m cable	448356
Opto-coupler for volt-free bms connection	447340
ISO 45% Coarse (G3) 2x Filter	442356
ISO ePM10 50% Pollen (M5) 1x Filter	444199
Grease 2x Filter	372774
Acoustic Purge Fan	477988
Acoustic Purge Fan XL	479829

## SAP PCDB Test Results

	SAP 2009		SAP 2012	
	Thermal Efficiency %	SFP (W/l/s)	Thermal Efficiency %	SFP (W/l/s)
K+1	85	0.72	85	0.78
K+2	85	0.74	85	0.89
K+3	84	0.83	82	1.03
K+4	83	0.92		


# SEC Class

Model	SEC Class
Kinetic CWH/CSH	A


## Performance

Fan speeds are fully adjustable within the performance range.

Horizontal Spigots

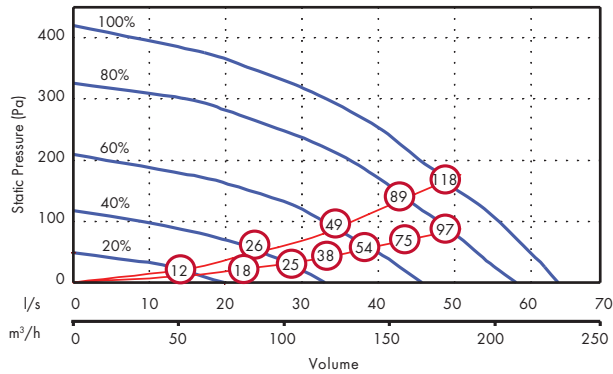


Vertical Spigots

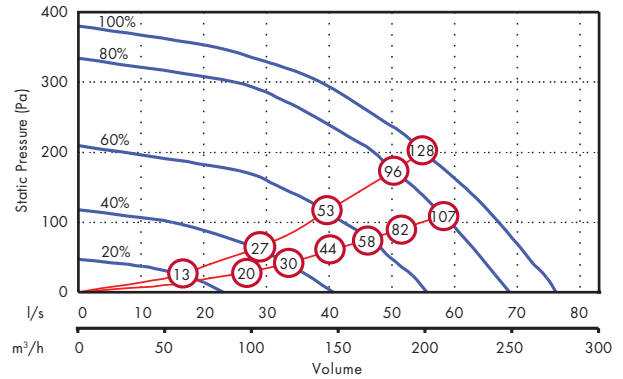


x figure relates to Wattage (both motors)

## Dimensions (mm)

Unit

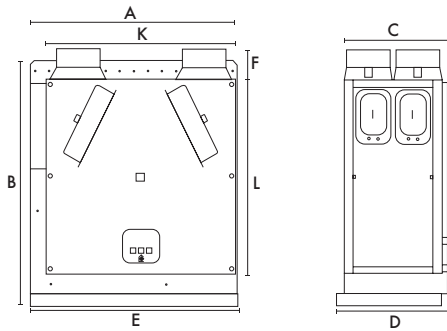

Minimum clearance from the bottom of this unit to the top of the hob must be:  
 Gas: 750mm  
 Electric: 650mm/ 550mm (SELV)



A	B	C	D	E	F	G	H	JØ	K	L	kg
590	710	295	316	598	90	140	360	125	550	550	27

## Sound Data

Flow l/s	Test mode	Octave band, Hz, dB SWL								SPL dB(A) @ 3m
		63	125	250	500	1K	2k	4K	8K	
10	Supply	47.8	40.2	38	31.1	28.2	22.1	23.6	30.9	21.4
	Extract	47	38.7	36	29.9	25	22.4	23.3	30.8	20.6
	Breakout	43.6	36.2	37.4	30.9	27.4	23.3	24.2	31.4	18.6
20	Supply	54	46.6	50.2	44.5	44.4	38.3	28.8	31.9	31.2
	Extract	46.8	40.5	34.6	34.2	34.6	25.9	23.7	30.3	22.9
	Breakout	45.9	39.9	40.6	35.7	33.5	28.4	25.3	31.2	21.3
30	Supply	58.1	54.5	57.6	52.2	51.7	47.6	38.6	35.8	38.5
	Extract	47.6	46.2	38.7	41.3	42.8	33.9	26.4	30.5	28.4
	Breakout	45.2	42.4	48.2	40.8	37.7	35.2	30	31.1	25.2
40	Supply	65.2	58.4	62.3	58	56.5	52.5	44.1	41.4	43.6
	Extract	53.5	53	44	47.7	48.1	39.7	31.5	31.5	33.5
	Breakout	50.9	47.6	47.4	48.1	42.5	40.8	36.3	34.4	29.3
50	Supply	66.4	63.2	66.3	62.5	61.7	57.4	50	47.8	48.3
	Extract	64.2	55.2	48	50.9	52.1	44.5	35.9	35	37.2
	Breakout	55	51	51.3	51.6	46.9	46.0	42	38.3	33.2

Tested according to BS EN 13141-7:2010. Breakout quoted spherical. Supply and Extract quoted hemispherical. For in-duct data, end reflections are added based on the spigot size of the unit.

## Consultant's Specification

### Operation

The supply and extract ventilation unit shall be a Sentinel Kinetic as manufactured by Vent-Axia and shall be sized as indicated on the drawings and shall be in accordance with the particular specification.

Supply air to the room shall be pre-heated by the extract air via the integrated composite plastic counterflow heat recovery cell. The Sentinel Kinetic shall automatically vary the ventilation rate via EC/DC motors, as it receives signals from one of the optional interconnected sensors. When a signal is received, the fans shall either vary their speed proportionally or on a trickle and boost principle.

The unit shall have the facility to commission the supply and extract fans individually via in-built minimum and maximum speed adjustment, or alternative wired remote control unit. The fans themselves shall have independent, infinitely variable speed control.

### Unit Specification

The unit shall be manufactured with an ABS outer case construction, and incorporate a metal duct to the cooker hood, intumescent fire damper and thermal switch, in accordance with BRE Digest 398.

The unit shall have a high efficiency composite plastic counterflow heat exchanger, supply and extract filters, automatic summer bypass, integral minimum and maximum infinitely variable speed controls with fascia mounted failure indication. The unit shall have low energy, high efficiency EC/DC fan/motor assemblies with sealed for life bearings. The impellers shall be high efficiency forward curved centrifugal type.

The unit shall have a heat exchanger cell with a thermal efficiency of up to 92% when tested to EN 308. This shall be protected by ISO 45% Coarse (G3) Filter 2pk grade synthetic filters on supply and extract. Complete with a condensate drip tray and drain connection.

The unit shall be constructed with a removable Core allowing full maintenance access. The removable Core shall provide access to the following:

- ✓ Supply and extract filter
- ✓ Heat exchanger
- ✓ Access to the electrical connections

Access shall be provided for wiring termination and setup/commissioning. The backlit LCD user interface therein shall be removable for remote mounting if required.

Units shall be as manufactured by Vent-Axia Ltd.

Sound tested to BS EN 13141-7:2010

### Standard Controls

All Sentinel Kinetic units shall incorporate the following functions integrally mounted, pre-wired and factory fitted by the manufacturer:

- ✓ Integral infinitely variable fan speed control on supply and extract
- ✓ Integral min/max ventilation control/set point
- ✓ Integral BMS interfaces - control and status indication
- ✓ Heating interlocks
- ✓ 0-10V proportional speed adjustment
- ✓ Volt free contacts
- ✓ 24V sensor supply
- ✓ Integral on/off or trickle boost function from remote switch e.g. PIR occupancy detector
- ✓ The unit shall be controlled by the 'Sentinel' control devices (enablers and sensors) as detailed in the schedule or on the drawings
- ✓ Fully automatic summer bypass
- ✓ Switched Live input with adjustable 'Delay-On' feature

- ✓ Fan failure or component failure indicated via individual fault code display
- ✓ Running time counter
- ✓ Control panel PIN number lock
- ✓ Automatic frost protection effective to -20°C
- ✓ Tool free filter access
- ✓ The unit shall incorporate ('H' models) an integral humidity sensor with the following features:
  - Ambient Response; Raises the humidity trigger point as dwelling temperature reduces
  - Rapid Response; Monitors the rate of change in humidity and triggers increased airflow even if the humidity trigger threshold is not reached
  - Proportional Response; Incrementally increases the fan speed to reduce noise and reduce energy consumption

### Integral Cooker Hood Specification

The Sentinel Kinetic Cooker Hood shall consist of a telescopic Hood and galvanised steel duct connection to the MVHR Unit.

The Hood construction shall be of grey powder coated steel with Brushed Aluminium or White painted fascia.

The Hood shall trigger the MVHR unit to a pre-defined boost speed and open the summer bypass when opened, and shall have two low-energy lamps illuminating the hob top.

Filter shall be a flat metal grease filter, removable for cleaning.

The galvanised steel ductwork shall provide a continuous fire barrier between the Hood and the MVHR unit. It shall contain an Intumescent fire damper, thermal cut-out and volume balancing damper. The thermal cut-out shall switch off the MVHR unit at a pre-defined safety temperature.


The duct shall have an access panel for cleaning by the end-user.

### Mounting Option




Wall

## Airflow Direction

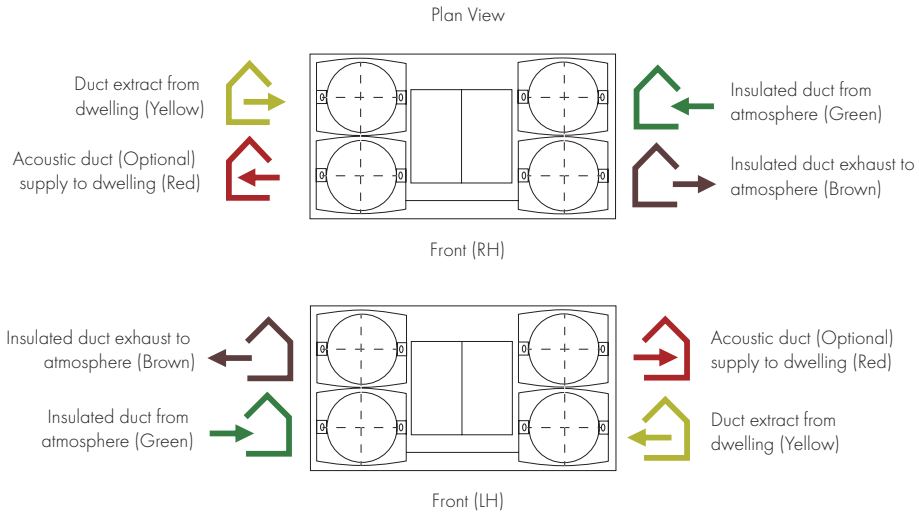


## Electrical Connection

Please note: Electrical connection should be carried out by an appropriately qualified person and in accordance with current wiring regulations.

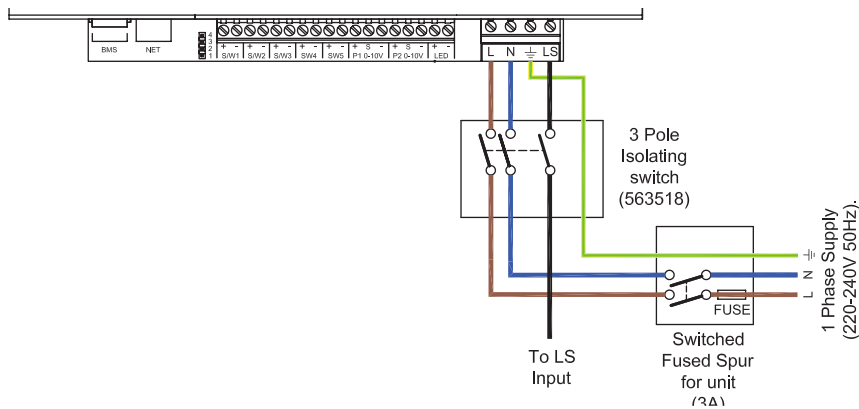


## Trickle to Boost by a Light Circuit

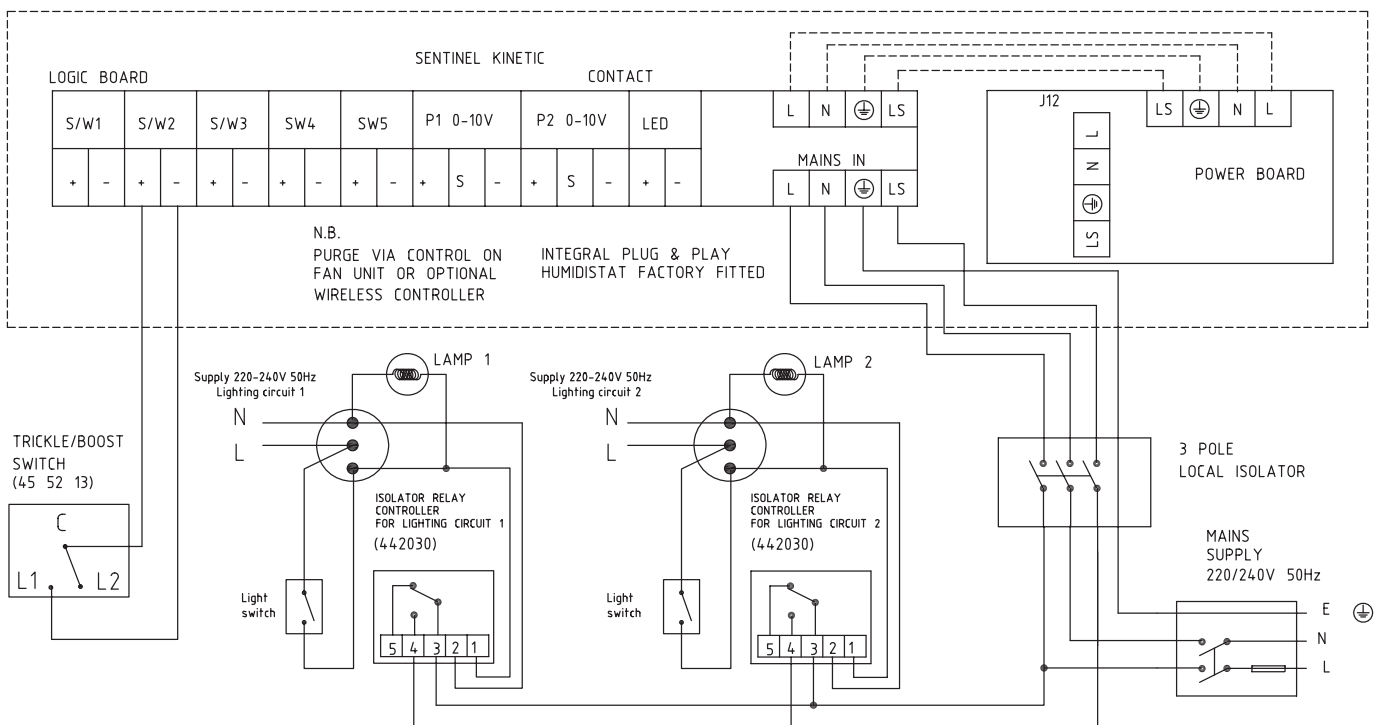

# Lo-Carbon Sentinel Kinetic<sup>®</sup> Horizontal

- Manufactured in the UK
- Building Regulations ADF compliant
- Recognised in SAP PCDB
- Energy Savings Trust best practice compliant
- Up to 81% heat recovery whilst controlling condensation
- Programmable Summer bypass
- Digital controller for simple and accurate commissioning
- External condensate connection
- Plug and play controls; Humidistat
- LS inputs (Light Switch)
- Volt-free inputs
- Self diagnosis for simplified fault finding
- Adjustable delay On/delay Off timer

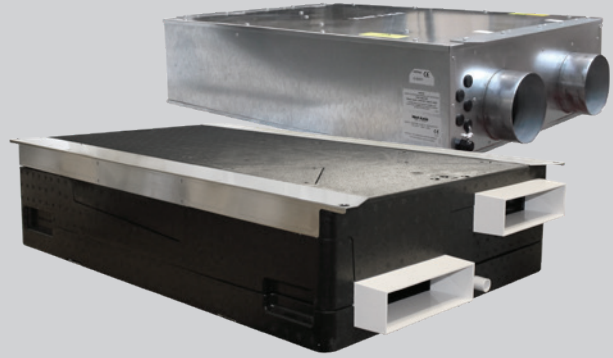

## The Sentinel Kinetic Horizontal Range

A wholehouse heat recovery system with up to 81% heat exchange efficiency. An easily accessible heat recovery cube protected by two removable ISO 45% Coarse (G3) Filter 2pk. Two Lo-Carbon Energy Saving EC/DC fans ensure long life (typically over double the life of AC motors) and lowest possible energy use. Fully insulated construction with built-in condensation drain. Specifically designed for new build constructions with a high level of insulation.

Lo-Carbon Sentinel Kinetic Horizontal meets the latest requirements of the Building Regulations ADF for wholehouse system ventilation: Continuous mechanical supply and extract with heat recovery. Each model has three fully adjustable speeds and a purge setting (maximum flow). Supplied with the unit is a digital controller that can be used to pre-set the speeds to any required airflow within the performance range.

## Integral Humidity Sensor

The integral humidity sensor ('H' models) increases speed in proportion to relative humidity levels, saving energy and reducing noise. The sensor also reacts to small but rapid increases in humidity, even if the normal trigger threshold is not reached. This unique feature ensures adequate ventilation, even for the smallest wet room. The night time relative humidity setback feature suppresses nuisance tripping as humidity gradually increases with falling temperature. Acoustically lined - low noise levels from only 20dB(A) @ 3m.

## Models

Model	Stock Ref
Kinetic 200ZPH	407162
Kinetic 200ZH	449540A
Kinetic 200ZMH	448778A
Kinetic 300ZH	449536A

## Accessories

Model	Stock Ref
200ZPH 45% Coarse (G3) 2x Filter	407584
200ZH/ZMH 45% Coarse (G3) 2x Filter	449524

200ZH/ZMH ePM10 50% Pollen (M5) 1x Filter	404574
300ZH 45% Coarse (G3) 2x Filter	449575
300ZH ePM10 50% Pollen (M5) 1x Filter	404575
Acoustic Purge Fan	477988
Acoustic Purge Fan XL	479829

## Multiple Control Options:

Five Volt-free pairs of switch terminals for sensor inputs allow boosting from a full range of Vent-Axia controllers - humidistats, PIR, timers.

Two terminals with 0-24V outputs allow 0V to 10V proportional control by sophisticated controllers such as CO<sub>2</sub> sensors and proportional humidistats.

Switch-live for boosting via light switches (220-240V AC) or manual Normal/Boost switches. This connection has the advantage of Delay-On and Delay-Off facility. Delay-On enables you to prevent the Boost airflow between 0 and 10 minutes after a light switch has been activated. Delay-Off allows the Boost airflow to continue after a light switch is turned off to ensure effective clearance of humidity. This timer is adjustable between 0 and 25 minutes.

## Summer Bypass

An internal damper operates when the external temperature is below the internal temperature, and the internal temperature is too high.

The bypass opens and allows the cooler outside air to help cool the dwelling.

Normal mode: Fans run on Normal speed with bypass open until the internal dwelling temperature falls below the set 'Indoor' (maximum desired) temperature.

Evening Purge mode: The fans run on Boost speed until the internal temperature falls below the set 'Indoor' temperature. If, after five hours the internal temperature is still above the set 'Indoor' temperature, the unit will switch down to normal speed for the remainder of the 'bypass open' period.

Nighttime Purge mode: As Evening Purge, except that the unit will continue on Boost speed until the internal air temperature reaches the 'Outdoor' temperature set point (Default 14°C). This mode gives pre-cooling of the dwelling for the following day.

In Evening and Night Time Purge modes, the user can turn off the boost function by pressing the Boost button.

### Frost Protection

In cold climates there is a possibility of frost building up on the intake side of the heat exchanger. In order to prevent damage, the Kinetic reduces supply flow while maintaining extract flow at temperatures down to -20°C.

### SEC Class

Model	SEC Class
Kinetic 200ZH/ZPH/ZMH	A
Kinetic 300ZH	A


### SAP PCDB Test Results

200ZPH	SAP 2009		SAP 2012	
	Thermal Efficiency %	SFP (W/l/s)	Thermal Efficiency %	SFP (W/l/s)
K+1	86	0.62	84	0.67
K+2	84	0.65	82	0.82
K+3	83	0.76	80	1.07

200ZH/ZMH	SAP 2009		SAP 2012	
	Thermal Efficiency %	SFP (W/l/s)	Thermal Efficiency %	SFP (W/l/s)
K+1	80	0.69	81	0.73
K+2	81	0.70	81	0.89
K+3	80	0.80	79	1.12
K+4	80	0.97	78	1.39
K+5	79	1.14		


300ZH	SAP 2009		SAP 2012	
	Thermal Efficiency %	SFP (W/l/s)	Thermal Efficiency %	SFP (W/l/s)
K+1	77	0.59	78	0.54
K+2	78	0.51	78	0.61
K+3	78	0.57	78	0.75
K+4	78	0.66	78	0.93
K+5	78	0.76	77	1.13
K+6	78	0.88	76	1.35
K+7	77	1.05		

### Dimensions (mm)

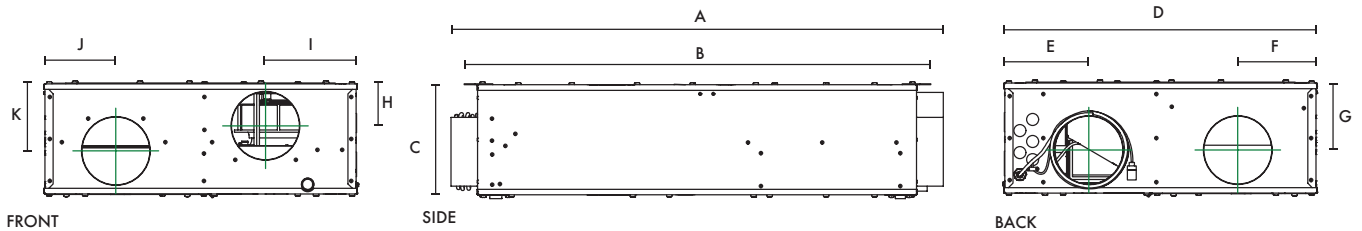

Model	A	B	C	D	E	F	G	H	I	J	K	Spigots Ø
200ZH	895	849	200	570	155	144	122	76	167	131	122	125
300ZH	985	940	301	720	184	179	187	102	279	174	187	150

Weight: 200ZH - 26kg, 300ZH - 38kg

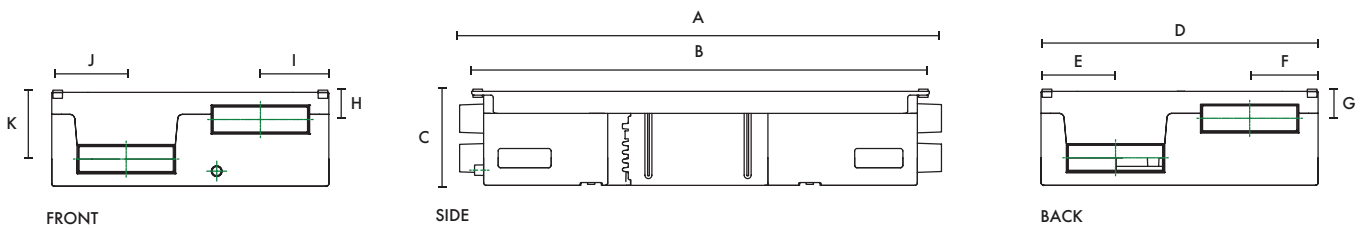

Model	A	B	C	D	E	F	G	H	I	J	K	Spigots
200ZPH	1000	950	200	575	155	142	60	61	142	154	143	204x60
200ZMH*	895	849	200	570	195	140	54	66	168	138	143	204x60


Weight: 200ZPH - 14kg, 200ZMH - 26kg

\*Galvanized steel outer case construction



## Performance - 200ZH/ZMH/ZPH Model

Fan speeds are fully adjustable within the performance range.

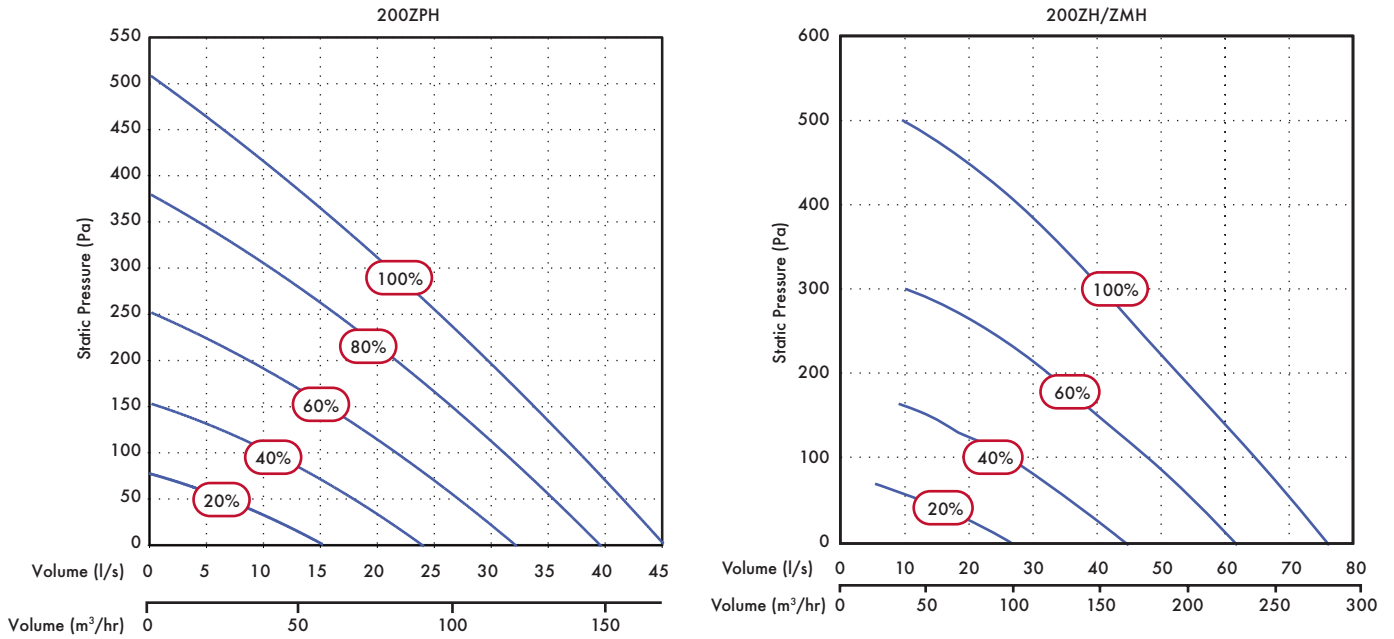

### Sound Data - 200ZPH Model

Speed	Test mode	63	125	250	500	1k	2k	4k	8k	dB(A) at 3m
20%	Breakout	48.3	41.3	37.7	35.8	34.5	28.2	26	31.2	21.5
	Supply	39.6	37.1	36	32.9	30.6	22.9	24.9	29.4	23.1
	Extract	49.4	40.7	35	30.4	26.3	22.5	23.6	30.1	20.8
40%	Breakout	47.8	42.2	46.7	40.6	40.2	34.2	28.1	31.2	25.3
	Supply	45.7	38.3	40.7	39	38.1	28.7	24.9	28.5	28.1
60%	Extract	50	45.5	39.9	37	34.3	28.6	25.1	30.6	24.3
	Breakout	54.4	51.2	53.8	46.2	43	38.9	33.8	32	29.7
	Supply	46.1	49.2	45.3	44.4	42.4	35.2	27	29.3	32.7
80%	Extract	49.5	41.9	45.4	41.7	39.4	35.2	27.6	30.3	27.7
	Breakout	50.4	51.2	56.7	53.9	48.5	43.2	39.9	34.9	34.5
	Supply	52.9	48.9	47.5	51.3	47.2	40.8	31.2	30	36.8
100%	Extract	48.9	43.3	46.8	50	42.4	38.6	31.3	30.1	32.2
	Breakout	49.3	49.8	52.9	54	51	46.3	41.2	35.7	35.1
	Supply	43.8	45.8	50.7	56.3	50	44.3	35.7	29.7	38.2
	Extract	53.2	46.9	48	52.8	45.4	42.1	35.1	30.5	34.9


### Sound Data - 200ZH/ZMH Model

Flow %	Test mode	63	125	250	500	1k	2k	4k	8k	dB(A) at 3m
20	Supply	50.3	54	50.1	45.5	37	36	27.5	31.1	30.0
	Extract	47.2	47.7	46.6	41.8	30.7	27.9	24.6	30.5	26.3
	Breakout	48.8	55.8	51.2	43.8	32.4	29.0	25.4	30.8	26.8
40	Supply	52.7	61.7	60.1	61.8	47.4	45.1	38.1	40.1	42.7
	Extract	50.7	55.4	55.0	51.5	37.5	34.6	25.9	30.7	33.9
	Breakout	53.7	60.1	61.1	50.7	40.2	35.8	27.1	30.3	34.0
60	Supply	52.8	64.5	66.7	59.4	51.1	51.1	42.9	39.3	44.0
	Extract	50.6	59.0	62.1	57.1	43.7	40.0	29.0	31.6	39.7
	Breakout	55.1	64.4	66.8	57.5	47.0	41.4	32.0	32.0	39.7
100	Supply	58.3	69.2	68.6	64.6	56.9	56.1	47.9	45.6	48.1
	Extract	51.8	63.1	64.9	63.9	52.4	45.9	34.8	34.8	45.2
	Breakout	59.4	68.1	69.7	68.3	53.1	47.1	36.5	34.3	46.5

Tested according to BS 848. Breakout quoted spherical. Supply and extract quoted hemispherical.

## Performance - 300ZH Model

Fan speeds are fully adjustable within the performance range.

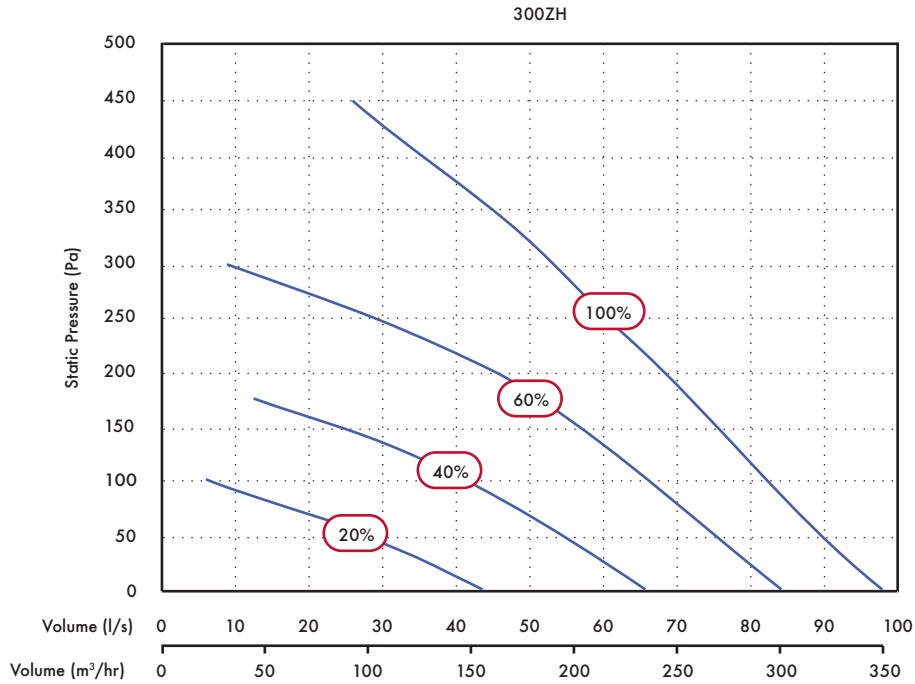

## Sound Data - 300ZH Model

Flow l/s	Flow %	Test mode	63	125	250	500	1k	2k	4k	8k	dB(A) at 3m
26	10	Supply	42.5	42.8	38.3	32.9	28	24.6	25.5	30.3	26.3
		Extract	46.9	45	40.3	34.4	27.4	23	24.3	30.1	22.5
		Breakout	48.7	52.1	47.7	40.5	32.9	27.3	25.1	31.6	24.4
44	20	Supply	45.6	47	41.7	35.7	31.7	26.7	24.8	30	29.9
		Extract	46.9	48.6	47	38.2	29.5	25.3	23.8	29.9	25.3
		Breakout	50.2	56.4	53.9	46.3	37.5	32.5	25.2	31.4	28.8
55	30	Supply	44.4	46	52.9	39.4	35.1	31.9	25.5	30.5	33.9
		Extract	47	48	55.5	42.5	32.2	29.9	25.7	30.6	30.6
		Breakout	52.2	59.6	62	51.4	41.9	37.4	28.1	31.4	34.7
66	40	Supply	43.1	44.4	54.3	43.5	39.2	35.7	27.7	29.9	35.0
		Extract	48.9	49	58.4	45.9	35.7	33.4	25.3	29.9	33.4
		Breakout	54.6	58.3	66.1	52.6	39.3	36.5	31.1	35.3	37.7
85	60	Supply	44.7	49.8	58	50.4	45	41.9	30.6	30.3	39.1
		Extract	51	53.6	61.2	50.1	41.6	40.1	30.7	31.1	36.7
		Breakout	57.5	62.6	68.7	57.5	45.9	41	36.3	34	40.7
96	80	Supply	46	52.2	57.1	56.5	47.2	44.2	32.3	30.5	40.5
		Extract	55.5	55	63.1	53.4	44.3	41	33.5	31.4	38.8
		Breakout	62.2	65.7	68.8	63	50.8	43.8	38.8	35.4	42.9
98	100	Supply	46.6	52.3	57	55.4	47.1	43.7	32.1	30.3	40.1
		Extract	53.7	55.2	63.3	53.3	44.1	41.2	33.2	31.5	38.9
		Breakout	62.2	73.8	77.4	74.1	67.4	61	53.6	45.4	53.9

Tested according to BS848. Breakout quoted spherical. Supply and Extract quoted hemispherical.

## Consultant's Specification

### Operation

The supply and extract ventilation unit shall be as Sentinel Kinetic Z as manufactured by Vent-Axia and shall be sized as indicated on the drawings and shall be in accordance with the particular specification; 200Z - 200mm deep, 300Z - 300mm deep.

The Sentinel Kinetic Z shall automatically vary the ventilation rate via EC/DC motors, as it receives signals from one of the optional interconnected sensors. When a signal is received, the fans shall either vary their speed proportionally or on a trickle and boost principle.

The unit shall have the facility to commission the supply and extract fans individually via the wired remote control unit. The fans themselves shall have independent, infinitely variable speed control.

### Unit Specification (200Z/ZM, 300ZH)

The unit shall be manufactured with a galvanized steel outer case construction and shall have a high efficiency aluminium heat exchanger.

### Unit Specification (200ZP)

The unit shall be manufactured with high density EPP case and shall have a high efficiency polymer heat exchanger.

The unit shall have supply and extract filters, automatic summer bypass, integral minimum and maximum infinitely variable speed controls with failure indication via the wired remote controller.

The unit shall have low energy, high efficiency EC/DC fan/motor assemblies with sealed for life bearings. The impellers shall be high efficiency backward curved centrifugal type.

The unit shall have a heat exchanger cell with a thermal efficiency of up to 81% when tested to EN 308. This shall be protected by ISO 45% Coarse (G3) Filter 2pk grade synthetic filters on supply and extract. Complete with a condensate drip tray and drain connection.

The unit shall be constructed with a removable access panel allowing full maintenance access from below. The removable panel shall provide access to the following:

- ✓ Supply or extract fan
- ✓ Supply and extract filter
- ✓ Heat exchanger
- ✓ Access to the electrical connections

Access shall be provided for wiring termination and setup/commissioning.

Sound tested to BS EN 13141-7:2010

### Standard Controls

All Sentinel Kinetic Z units shall incorporate the following functions integrally mounted, pre-wired and factory fitted by the manufacturer:

- ✓ Infinitely variable fan speed control on supply and extract
- ✓ Min/max ventilation control/set point
- ✓ Heating interlocks
- ✓ 0-10V proportional speed adjustment
- ✓ Volt free contacts
- ✓ 24V sensor supply
- ✓ On/off or trickle boost function from remote switch, e.g. PIR occupancy detector
- ✓ The unit shall be controlled by the 'Sentinel' control devices (enablers and sensors) as detailed in the schedule or on the drawings

- ✓ Fully automatic summer bypass
- ✓ Switched Live input with adjustable 'delay-on' feature
- ✓ Fan failure or component failure indicated via individual fault code display
- ✓ Running time counter
- ✓ Control panel PIN number lock
- ✓ Automatic frost protection effective to -20°C
- ✓ The unit shall incorporate ('H' models) an integral humidity sensor with the following features:
  - Ambient Response: Raises the humidity trigger point as dwelling temperature reduces
  - Rapid Response: Monitors the rate of change in humidity and triggers increased airflow even if the humidity trigger threshold is not reached
  - Proportional Response: Incrementally increases the fan speed to reduce noise and reduce energy consumption

The unit shall be controlled by the 'Sentinel' control devices (enablers and sensors) as detailed in the schedule or on the drawings.


## Mounting Option



Slab


## Airflow Direction

View from beneath (drawing for airflow demonstration only - not intended to be an accurate representation of the product)

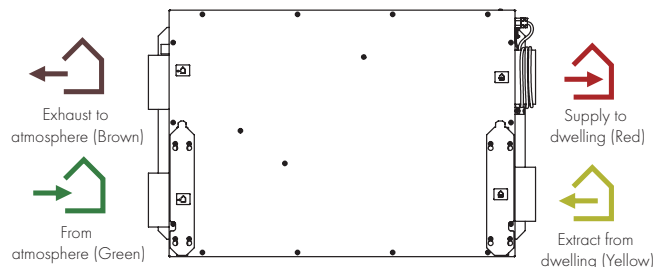


## Electrical Connection

Please note: Electrical connection should be carried out by an appropriately qualified person and in accordance with current wiring regulations.

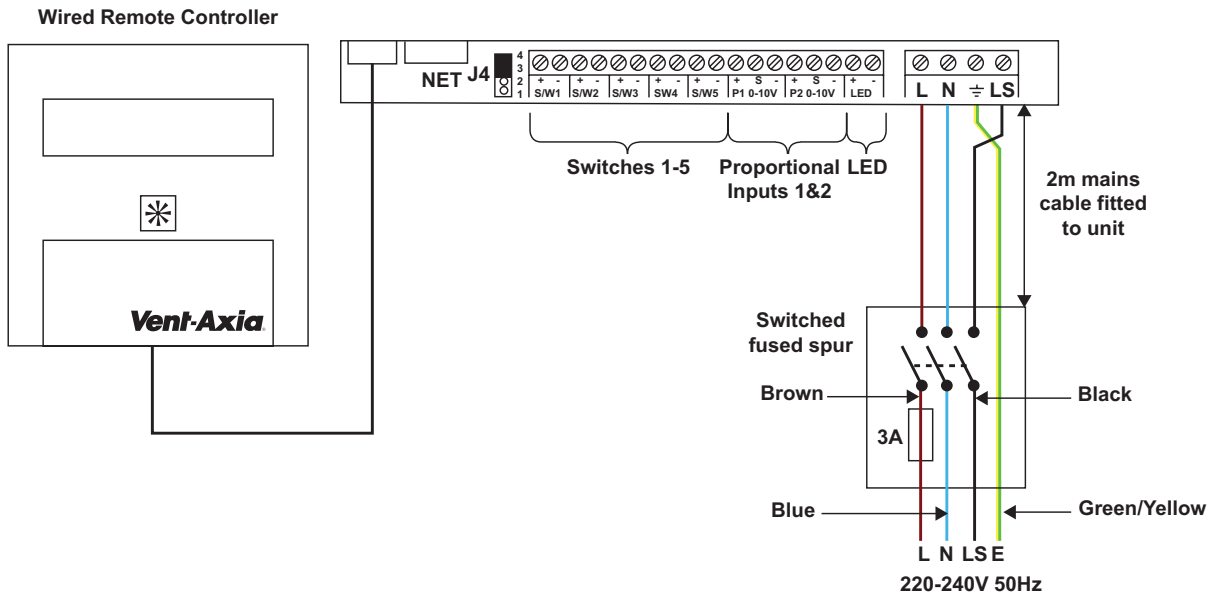

## Trickle to Boost by two lighting circuits or Trickle/Boost Switch

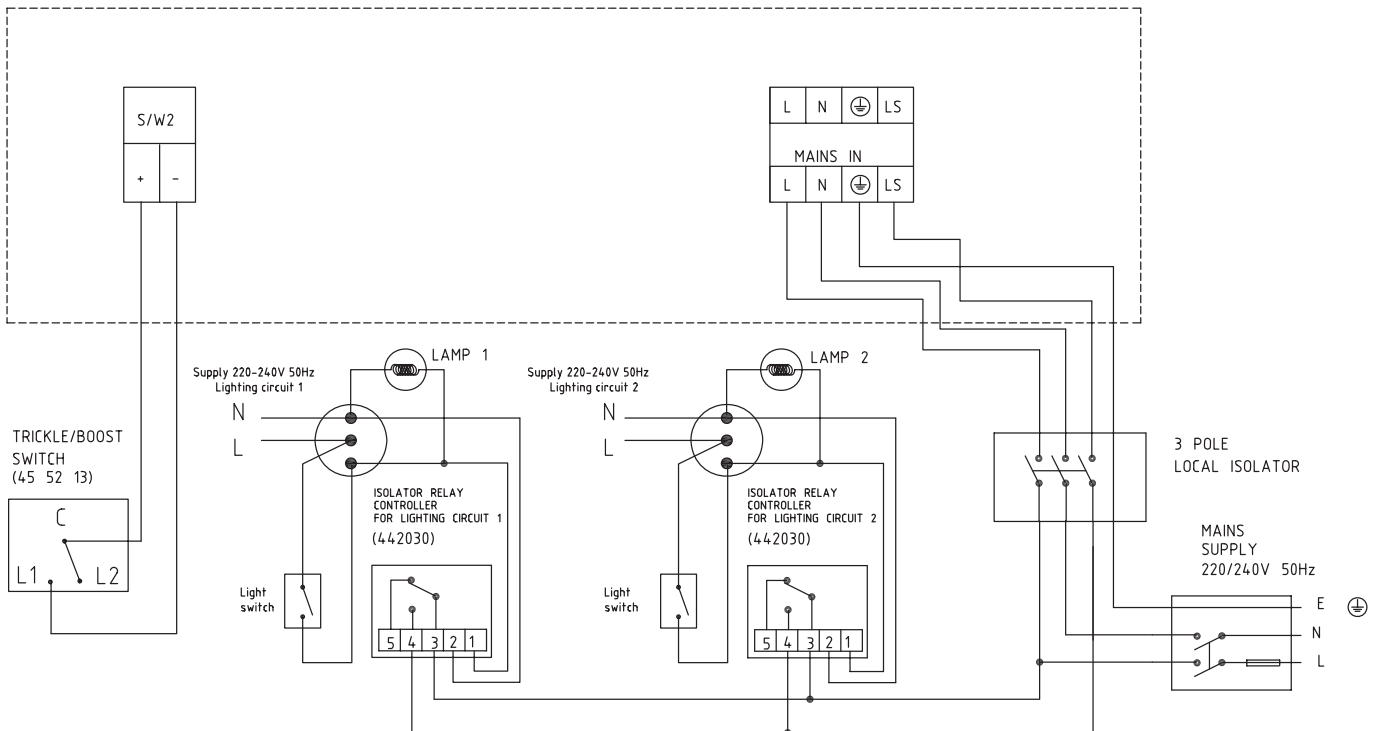

# Pull-out System Hood SELV

- Models available with either a White or Brushed Aluminium trim
- Fits within a 600mm wide aperture (300mm deep)
- Complete with two low energy 9W lamps
- All models are fitted with a metal washable grease filter as standard
- 125mm galvanised duct connection piece
- Integral fire damper in accordance with BRE 398
- Weight: 3.7kg
- SELV hoods allow the distance between the hood and an electric hob to be reduced from 650mm to 550mm



## Product

The Pull-out System Hood is designed to fit in a 600mm aperture above a hob. The telescopic hood incorporates two flat removable metal grease filters, two low energy light bulbs and is available with a White or Brushed Aluminium front trim.

The hood contains an integral fire damper in accordance with BRE Digest 398 and is connected to the mechanical ventilation unit by a galvanised steel duct connection piece. When the hood is opened the mechanical ventilation unit goes to boost speed.

## Why install a cooker hood?

Steam created during the cooking process can cause moisture to form on walls and furniture. In extreme cases this can lead to mould growth. Strong smells can also be created during cooking and these can spread throughout the dwelling. Cooking oils may be vaporised when frying and this oil can be deposited in areas around the cooker.

## The solution

When connected to an MEV or MVHR system, the Pull-out System Hood can be wired in such a way that when the hood part of the unit is pulled out the MEV or MVHR system will automatically switch to boost.

The Pull-out Hood System Hood comes with an integrated 125mm galvanised spigot to allow for connection to the MEV or MVHR system.


SELV hoods allow the distance between the hood and an electric hob to be reduced from 650mm to 550mm.

## Models


Model	Stock ref
White SELV	474790
Aluminium SELV	474791

## Dimensions (mm)


TOP

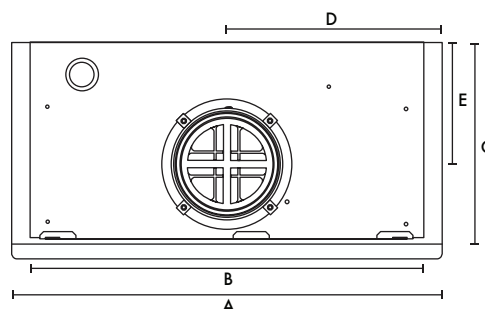

SIDE



FRONT

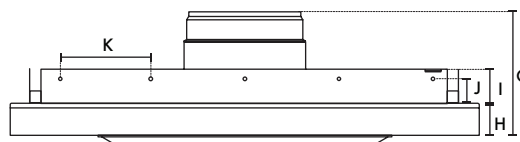

A	B	C	D	E	F	G	H	I	J	K	L
598	570	280	299	126	300	158	41	50	40	120	110

# HR100R/RS

- Controls condensation and odours
- Eliminates mould growth
- Up to 70% heat recovery - saves energy
- Extremely quiet operation
- Two speed settings
- ERP exempt (<30W)



The HR100R and HR100RS are ideal for single bedrooms/bathroom applications situated in hotel rooms, nursing homes and residential care homes.

The HR100R features top access making it ideal for loft installations.

The HR100RS features bottom access for installation on the slab above a suspended ceiling.

The HR100R/RS is a self-contained heat recovery unit for mounting in lofts and suspended ceilings. The unit is supplied without controls to allow for the unit to be tailored to suit the individual requirements.

Compatible with standard 100mm ducting for connection to internal grilles and external cowl.

The unit comes fitted with a single 2-speed motor, and provides continuous low volume ventilation with a boost option. A variety of control devices are available for manual or automatic speed control.

An integral heat exchanger transfers heat from the outgoing stale air to the fresh air supply, raising the supply air temperature whilst at the same time reducing its relative humidity.

Up to 18l/s FID capacity. The unit provides superior control of condensation and odours, ideal for bathrooms or small internal rooms.

## Models

### HR100R

Top access - ideal in loft installations.

<b>Model</b>	<b>Stock Ref</b>
HR100R	370377

### HR100RS

Bottom access - ideal for suspended ceilings.

<b>Model</b>	<b>Stock Ref</b>
HR100RS	435004

## Controllers


### Normal Boost Switch

A single gang switch to boost from high to low speeds on all heat recovery systems.

85 x 85 x 10mm (H x W x D)


<b>Model</b>	<b>Stock Ref</b>
Normal Boost Switch	455213

## HR100RS Version

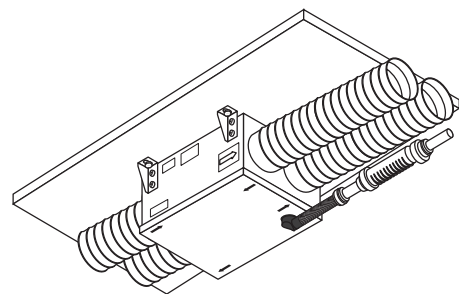




## Dimensions (mm)

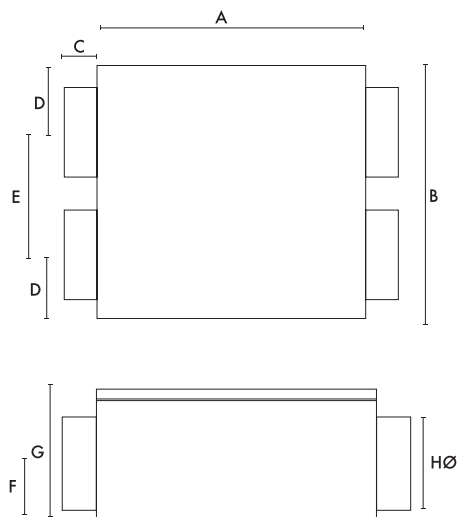

A	B	C	D	E	F	G	HØ
305	240	50	60	120	70	160	98

## Performance

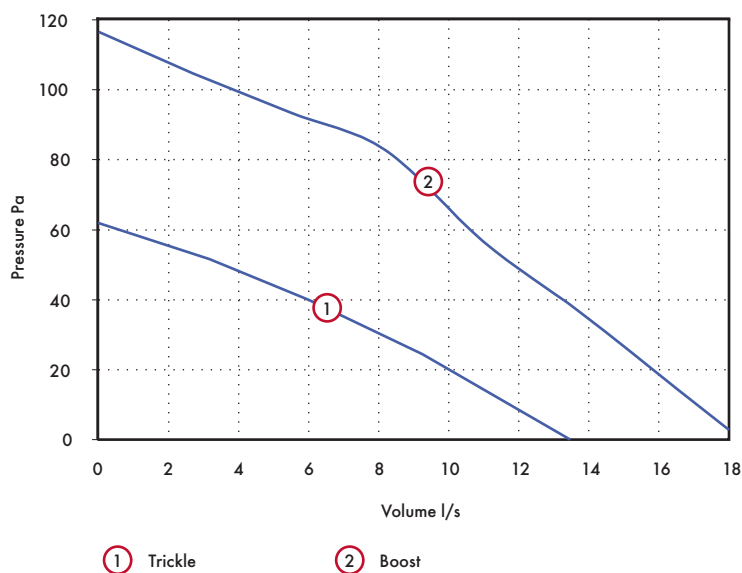

Model	Weight kg	Extract Perf. l/s		Watts		dB(A) @ 3m*	
		Boost	Trickle	Boost	Trickle	Boost	Trickle
HR100R	5.6	18.3	13.6	29	19	30	20
HR100RS	5.6	18.3	13.6	29	19	30	20

Mains electrical supply: 230V/50Hz

# Integra

- Up to 70% heat recovery
- Low power consumption
- Effective condensation control
- Summer mode



The Integra heat recovery unit has been specially designed to provide ventilation for flats or rooms in residential, commercial, educational or leisure applications. Balanced ventilation is achieved by using nominal 100mm diameter rigid ducting.

Using a high performance, polymeric heat exchange cube, together with two powerful fans, the Vent-Axia Integra achieves efficiencies of up to 70%.

The compact cube interleaves outgoing moist air with incoming fresh air, allowing the heat from one to warm the other without the two air streams mixing. Energy is saved on room heating, with no power being used by the cube itself.

Performance of Integra: Up to 49l/s FID. Ideal for installation in ceilings voids or cupboards.

The 150VA Transformer enables the selection of trickle settings to match dwelling volume.


## Models

Model	Stock Ref
Integra	456864

## Controller

Model	Stock Ref
Controller 150VA	563538


## Airflow Direction

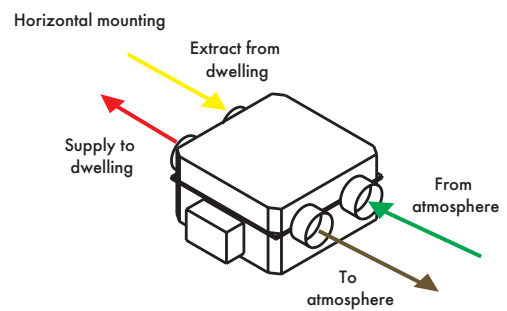

## SEC Class

Model	SEC Class	SEC Class (inc. LDC)
Integra	F	C


## Dimensions (mm)

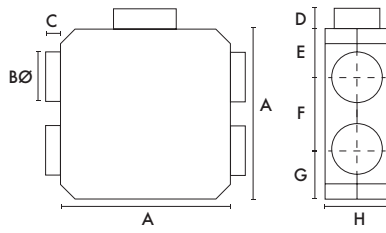

A	BØ	C	D	E	F	G	H
400	98	50	65	85	230	85	210

Weight: 6.5kg

## Performance

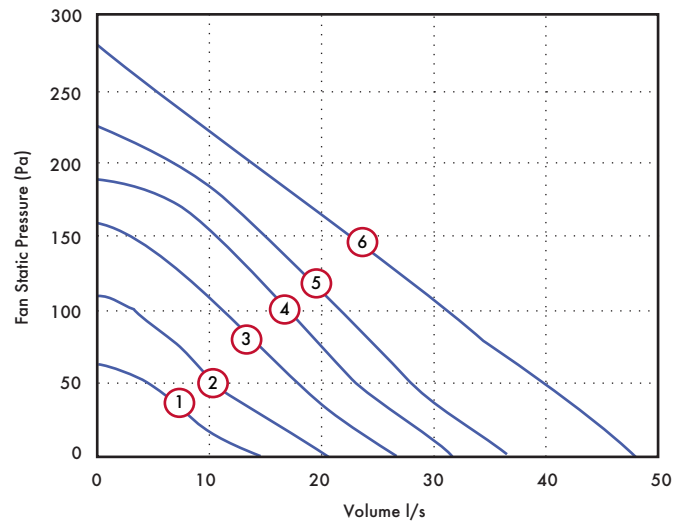

Motor Speed/Curve	Volume (l/s) (FID)	Voltage (V)	Wattage (W)
1	15	80	32
2	21	100	47
3	27	120	64
4	32	140	81
5	37	160	99
6	49	240	182

Integra to be used with a 150VA Transformer for maximum controllability.

# Integra Plus EC

- Up to 70% heat recovery
- Low power consumption
- Effective condensation control
- 3 speed control
- Summer mode
- EC motors



## Easy Installation

The Vent-Axia Integra Plus EC is designed for mounting in ceiling voids, lofts and above a suspended ceiling. Four 150mm spigots are provided for simple connection to insulated flexible or rigid ventilation ducting. The unit comes complete with a 22mm condensate outlet.

The Integra Plus EC incorporates two adjustable speeds and a Purge setting (full Speed).

Switching on the controller allows activation of the Summer Mode.


## Model

Model	Stock Ref
Integra Plus EC	437666EC

## SEC Class

Model	SEC Class	SEC Class (inc. LDC)
Integra Plus EC	B	A


## Airflow Direction

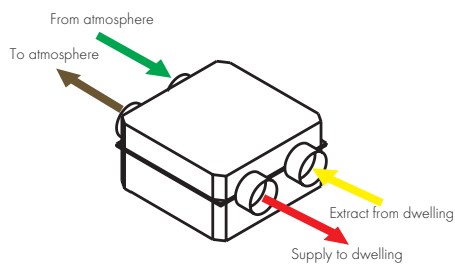

## Controllers & Sensors

Model	Stock Ref
Ambient Response Humidistat	563550
Visionex PIR	459623


## Dimensions (mm)

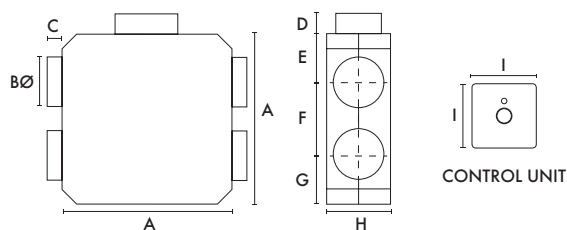

A	ØB	C	D	E	F	G	H	I
580	150	100	64	125	350	125	305	85

Weight: 17kg fan box

## Performance

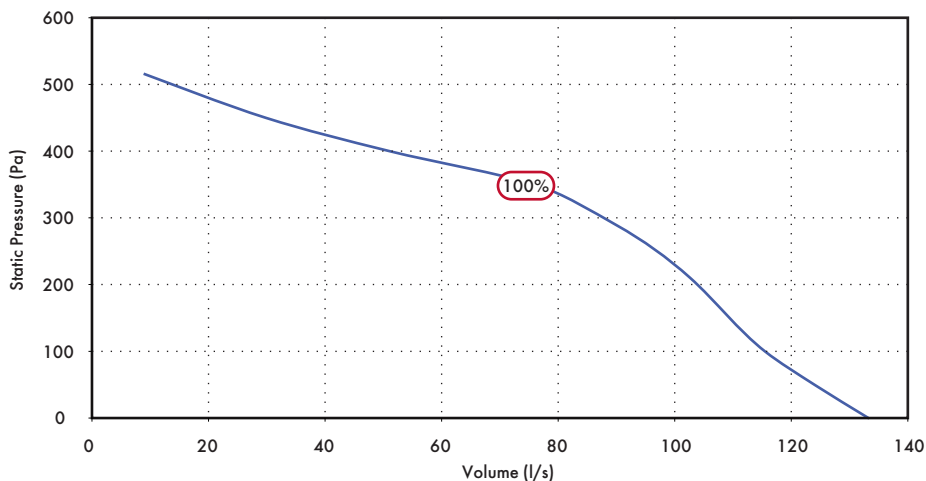

## Sound Data

Flow, l/s	Unit setting V	Test mode	Octave band, Hz, dB SWL								SPL dB(A) at 3m
			63	125	250	500	1k	2k	4k	8k	
55	4	Supply	39.2	43.1	44.5	47.1	42.6	36.0	29.3	30.7	30.7
		Extract	47.0	42.4	38.6	40.4	35.5	28.0	27.9	32.6	25.3
		Breakout	43.2	42.7	38.2	37.6	33.4	28.4	27.6	31.5	21.7
69	5	Supply	42.0	47.6	46.1	49.9	48.8	41.2	33.7	32.5	34.4
		Extract	47.8	42.2	41.4	43.2	40.4	29.6	27.7	32.5	27.7
		Breakout	45.2	45.7	41.9	40.7	37.3	30.5	27.5	32.4	23.8
79	6	Supply	46.0	49.7	50.6	54.0	54.4	45.9	39.6	36.9	38.7
		Extract	44.5	43.2	44.8	46.4	46.2	32.2	28.4	32.3	31.4
		Breakout	46.2	47.2	44.3	43.4	43.1	32.8	28.5	32.2	26.6
81	6.6	Supply	47.0	52.5	53.8	56.4	58.3	48.8	42.8	40.8	41.8
		Extract	50.3	45.3	47.7	48.5	47.4	35.0	30.7	32.9	33.0
		Breakout	45.5	47.9	45.5	45.5	45.5	34.0	29.2	31.5	28.3
95	7	Supply	48.9	54.1	56.3	58.0	59.2	51.0	45.9	43.8	43.3
		Extract	47.6	46.5	49.4	49.7	48.3	37.0	31.1	32.3	34.0
		Breakout	49.0	49.5	48.2	47.5	47.3	36.7	31.1	32.3	30.1
109	8	Supply	51.0	58.2	57.4	60.1	61.2	54.4	48.9	48.0	45.6
		Extract	56.2	52.4	51.7	53.1	49.6	39.5	33.8	33.2	36.3
		Breakout	51.8	53.9	51.3	50.7	48.7	40.3	34.0	32.5	32.2
113	9	Supply	49.1	56.1	59.4	62.8	63.3	57.2	52.1	50.8	47.4
		Extract	54.5	50.9	52.4	54.5	51.4	42.3	35.3	33.8	37.8
		Breakout	53.6	54.3	52.8	52.3	50.8	43.4	36.2	33.5	34.1

Tested according to BS848. Breakout quoted spherical. Supply and Extract quoted hemispherical.



# Overheating Solutions



Vent-Axia has designed a range of ventilation solutions which help satisfy overheating requirements in dwellings and meet the latest Approved Document Part O requirements. Overheating in homes has been the subject of many a headline in recent years, with the UK experiencing hotter, drier summers and heatwaves.

Part O ventilation rates, should not mean nuisance noise levels. The Vent-Axia Lo-Carbon NBR Cool Unitary Fan provides heat extraction from habitable rooms whilst minimising noise. A brand new control platform provides fully adjustable airflow, meaning Part O rates can be achieved easily, with sound levels as low as 8.5dB(A) at 3 metres. The solution comes complete with a backdraught shutter to prevent nuisance draughts in habitable spaces.

Vent-Axia has also designed a complete all-in-one boxed solution to help satisfy overheating requirements in dwellings, offering 20l/s, 30l/s, and 50 l/s solutions along with passive supply replacement air options for higher flow rates. The NBR Coolbox Kit range achieves low sound levels by utilising energy efficient Mixed Flow In-Line fans that are now quieter, two and half times the pressure of conventional axial fans and more compact than traditional inline fans making them ideal for overheating extraction.

**Vent-Axia**<sup>®</sup>







Lo-Carbon NBR Cool Unitary Fan

104 - 105

---



NBR CoolBox Kits

106 - 109

---



Acoustic Residential Purge Ventilator

110 - 111

---



Lo-Carbon Sentinel Econiq Cool-Flow

112 - 119

---




Lo-Carbon Sentinel Econiq Cool (KERS)

120 - 127

---

# Lo-Carbon NBR Cool Unitary Fan

- Designed and manufactured in the UK
- Unitary solution to help combat overheating in dwellings
- On-demand overheating extraction
- Sound levels complying with Part F building regulations
- Easy to commission with variable speed
- Local room control or automatic temperature sensor
- Passive Supply replacement air kit available when extract totals > 60l/s

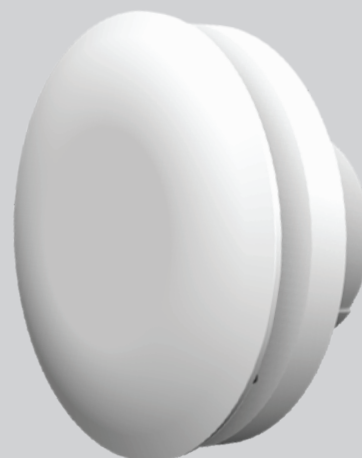

## Lo-Carbon NBR Cool Unitary Fan

Part O ventilation rates, should not mean nuisance noise levels. The Vent-Axia Lo-Carbon NBR Cool Unitary Fan, in 125mm, provides adequate ventilation whilst minimising noise.

The fan is designed in line with the Approved Document F and O 2021 Building Regulations.

The Lo-Carbon NBR Cool Unitary Fan has been designed to extract heat as and when the occupant needs heat extraction. As standard the Lo-Carbon NBR Cool Unitary Fan is set to run at 20 l/s which is adjustable.


The Lo-Carbon NBR Cool Unitary Fan also comes with the additional option of automatic temperature control, this would be triggered when the sensor reads 24 degrees or above.

A brand new control platform also provides fully adjustable airflow, meaning Part O rates can be achieved easily.

The solution comes complete with backdraught shutter to prevent nuisance draughts in habitable rooms.

## Near Silent Operation

The fan has been designed to be as discreet as possible for homeowners, with independently tested sound levels as low as 8.5dB(A).

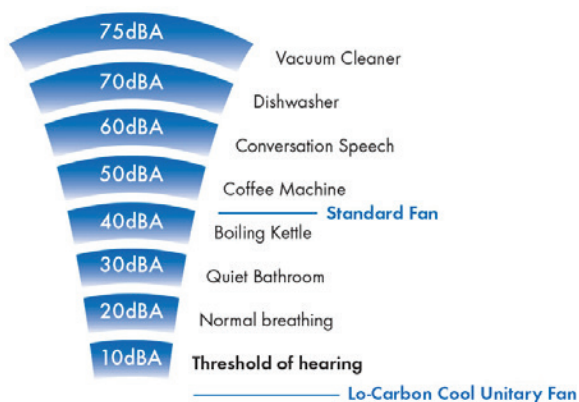

## Model

### Lo-Carbon NBR Cool Unitary Fan

For habitable rooms such as bedrooms and living rooms, our new 125mm heat extraction fan is the solution for developers with overheating issues. With a built-in temperature sensor as standard, automation or manual control are both an option.

Variable speed setting.

Model	Stock Ref
Lo-Carbon NBR Cool Unitary Fan	412262

## Accessories

Model	Stock Ref
Wall Kit White 125mm	455226
Wall Kit Brown 125mm	497434
Wall Kit Terracotta 125mm	497432
NBR Passive Duct Kit	412261

## Consultant Specification

The unitary overheating extract ventilation unit shall be the Lo-Carbon NBR Cool Unitary Fan as manufactured by Vent-Axia, exact unit sizing and specification shall be in accordance with the particular specification.

The Lo-Carbon NBR Cool Unitary Fan has been sized to meet the Part O extraction rates of up to 26 l/s, by default this is set to 20 l/s with manual control but this can be set to trigger at 24deg automatically through the built-in temperature sensor. Supplied with a 5 - year warranty.

The Lo-Carbon NBR Cool Unitary Fan should have variable speed settings of 5-26 l/s achieving a minimum noise level of 8.5dB(A) at 3 metres. All sound pressure levels are quoted at hemispherical measurements. All units shall be and independently third-party tested at the Sound Research Laboratory (SRL), tested to BS EN 13141-6.


The unit shall comprise a single high efficiency EC/DC motor to deliver specific fan powers as low as 0.09 W/l/s, as measured in accordance with the SAP PCDB test method and listed on the PCDB database.

The controls for the Lo-Carbon NBR Cool Unitary Fan unit shall provide fully adjustable, intermittent heat extraction rates. The Boost speed shall be activated via an integral temperature sensor or via LS Input.


The fan shall be compatible with low ceiling voids and have a spigot length of 66mm.

The unit should be commissioned as an Intermittent Heat Extraction fan based on the design duty required. By default this is 20 l/s.

## Dimensions (mm)

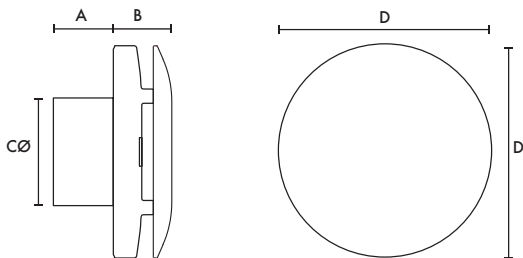


A	B	C	D
66	57	120	228



- 1 Rear cable entry
- 2 Side cable entry (cut plastic side wall to access)
- 3 100% variable speed adjustment
- 4 Installation mode (SW1)  
Back pressure detection system (SW2)


## Performance Guide

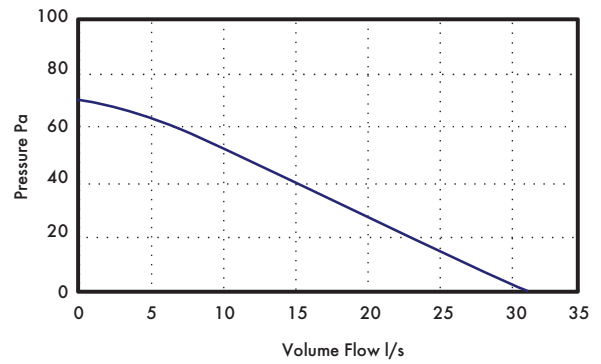

## Sound

Speed	dB(A)
Min	8.5
Max	37.9

## Installation Settings

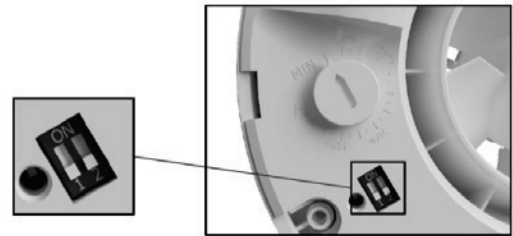


Dip Switch (SW1) (default OFF):

- OFF = Automatic Temperature Function Off (default)
- ON = Automatic Temperature Function On

# NBR CoolBox Kits

- Designed and manufactured in the UK
- Fully boxed solution to help combat overheating in dwellings
- On-demand overheating extraction.
- Sound levels complying with Part F Building Regulations
- 20l/s, 30l/s, and 50 l/s solutions
- Roof terminations not included but must not exceed 5pa of resistance at the relevant duties
- Passive supply replacement air option
- Local room control via remote switches or in room temperature sensors (by others)
- Easy to commission with predetermined speeds

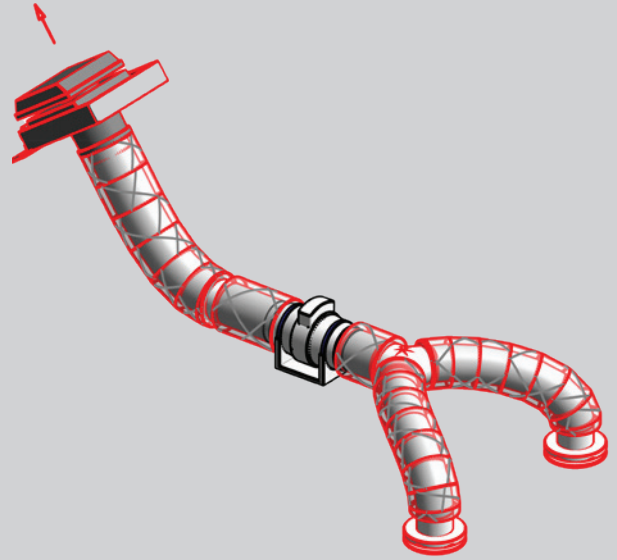

## Ducted Ventilation

Vent-Axia has designed a complete all in one boxed solution to help satisfy overheating requirements in dwellings, whilst achieving low sound levels with a range of kits that include energy efficient Mixed Flow In-Line fans that are now quieter, offer two and half times the pressure of conventional axial fans and are dimensionally more compact making them ideal for overheating extraction.

## Motors

The motor speed is selected on installation as per the Installation Guidance Sheet, motors are fitted with Standard Thermal Overload Protection (S.T.O.P.). All sizes with capacitor run motors. All sizes are Class II appliances. Supply voltage 220-240V/1/50Hz.

## Installation

These units have a separate footplate for simple mounting and detachable spigots for simple connection to ducting. The motor body chassis rotates to provide connection in acute spaces. Cleaning the product is simple as all parts can be removed without removing the ducting.

## Models

### Coolbox kits

Coolbox Inline Fan with Acoustic Mat, Insulated Ducting, Acoustic Flexible Duct, Worm Drive Clips, Backdraught Shutter, Y-Piece (30 and 50 Kits only), Extract Diffuser and Roof Termination by others.

Model	Stock Ref	Airflow
NBR CoolBox 20	412258	20l/s
NBR CoolBox 30	412259	30l/s
NBR CoolBox 50	412260	50l/s

### Passive kit

Insulated Flexible Duct 3m, Backdraught Shutter, Reducer, Supply Diffuser, Worm Drive Clips and Roof Termination by others.


Model	Stock Ref	Airflow
NBR Passive Duct Kit	412261	>60l/s

## Sound Data and Performance Guide

The sound data is based on the kits provided and an external roof vent supplied by others that conforms to at least 90% effective free area of the size of duct being used.


This equates to  $\geq 15,537\text{mm}^2$  for the NBR CoolBox 50/Passive Duct kit and for the NBR CoolBox 20/30  $\geq 11,039\text{mm}^2$ . The pressure of the roof vent must not exceed more than 5pa for the NBR CoolBox 50/Passive Duct kit and must not exceed more than 5pa for the NBR Coolbox 20/30 to provide the below sound levels and assurances of flow rate at the valve.

## Dimensions (mm)

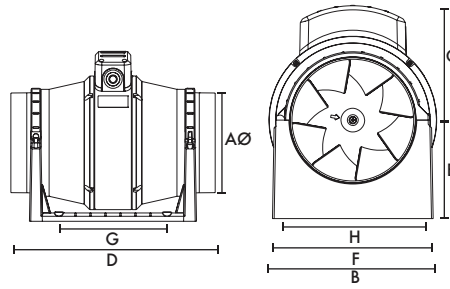

Model	NBR CoolBox 20/30	NBR CoolBox 50
AØ	122	147
B	178	200
C	124	138
D	259	350
E	96	118
F	168	192
G (fixing hole)	120	162
H (fixing hole)	153.5	178


## Sound Data and Performance Guide

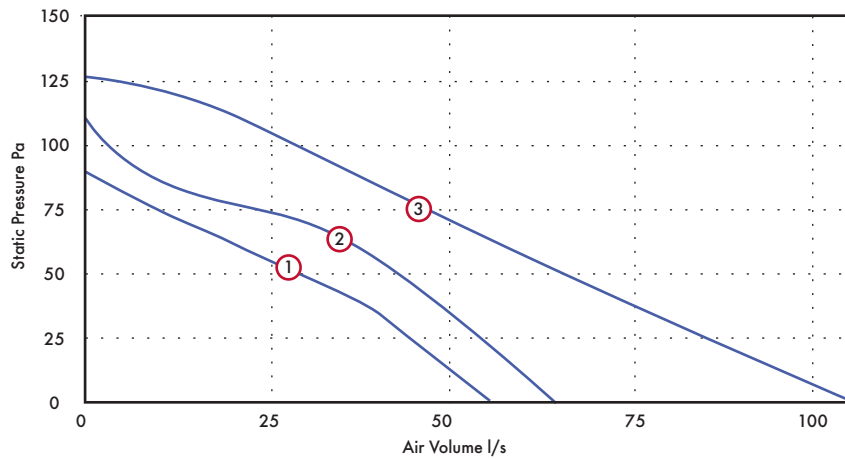


Model	Stock Ref	Flow Rate l/s	Dia mm	Speed	IP Rating	Curve Ref	Motor kW	F.L.C Amps	Estimated noise at 3m valve/s dB(A)
NBR CoolBox 20	412258	20	125	Low	IP44	1	0.03	0.12	25
NBR CoolBox 30	412259	30	125	Medium	IP44	2	0.03	0.12	22
NBR CoolBox 50	412260	50	150	Low	IP44	3	0.05	0.21	30
NBR Passive Duct Kit	412261	>60	150	n/a	n/a	n/a	n/a	n/a	n/a

## Installation Examples

### NBR CoolBox 20

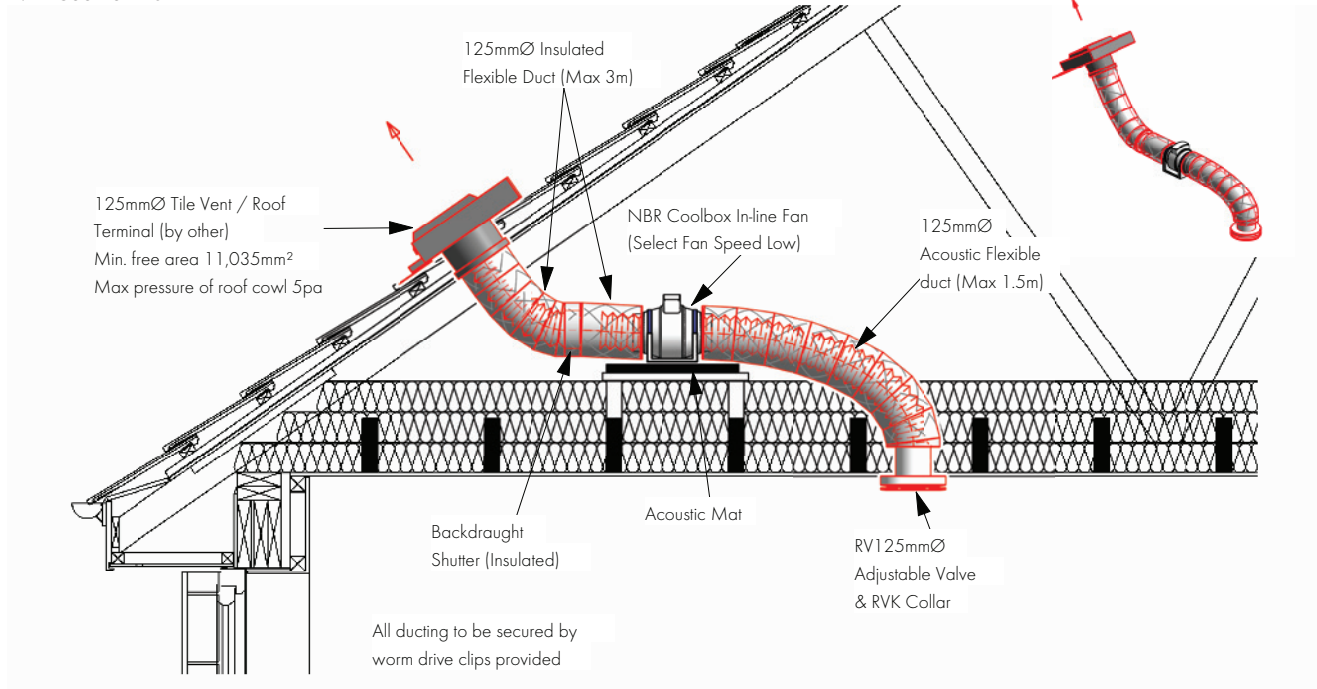


### NBR CoolBox 30

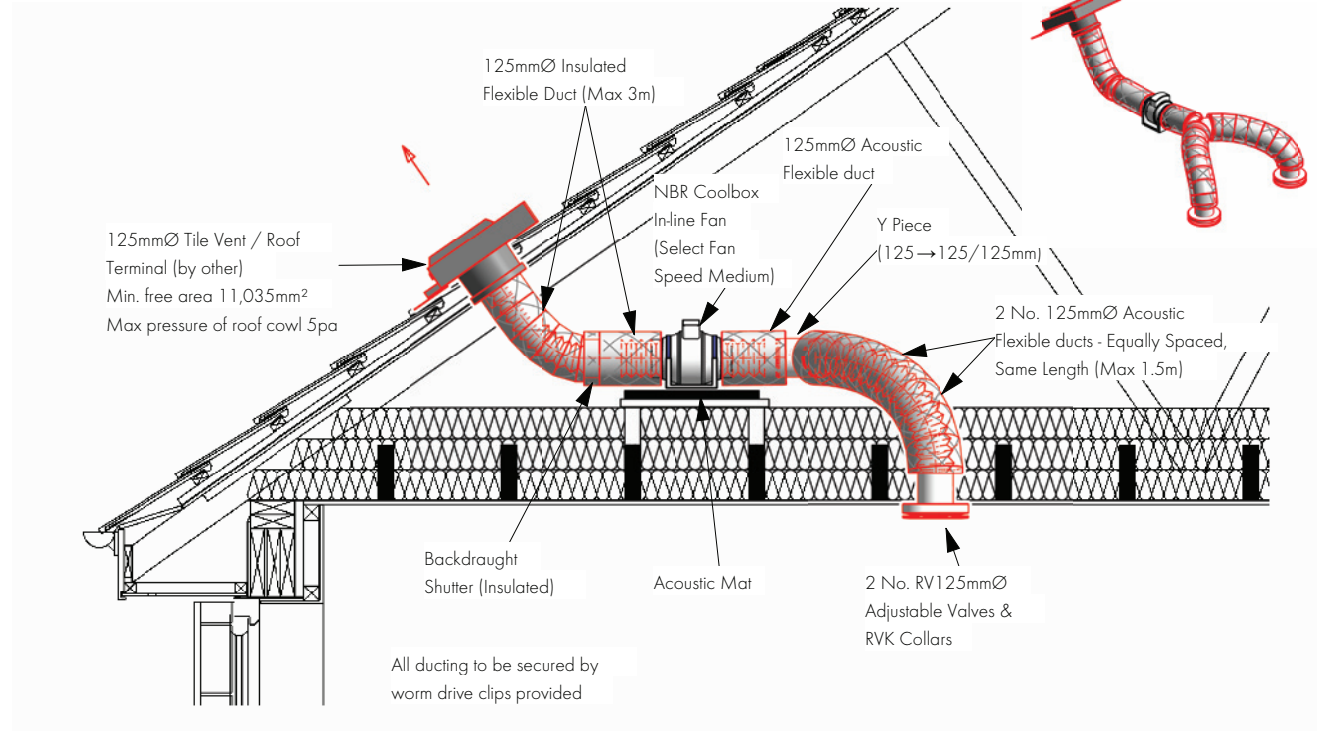


# Installation Examples

## NBR CoolBox 50

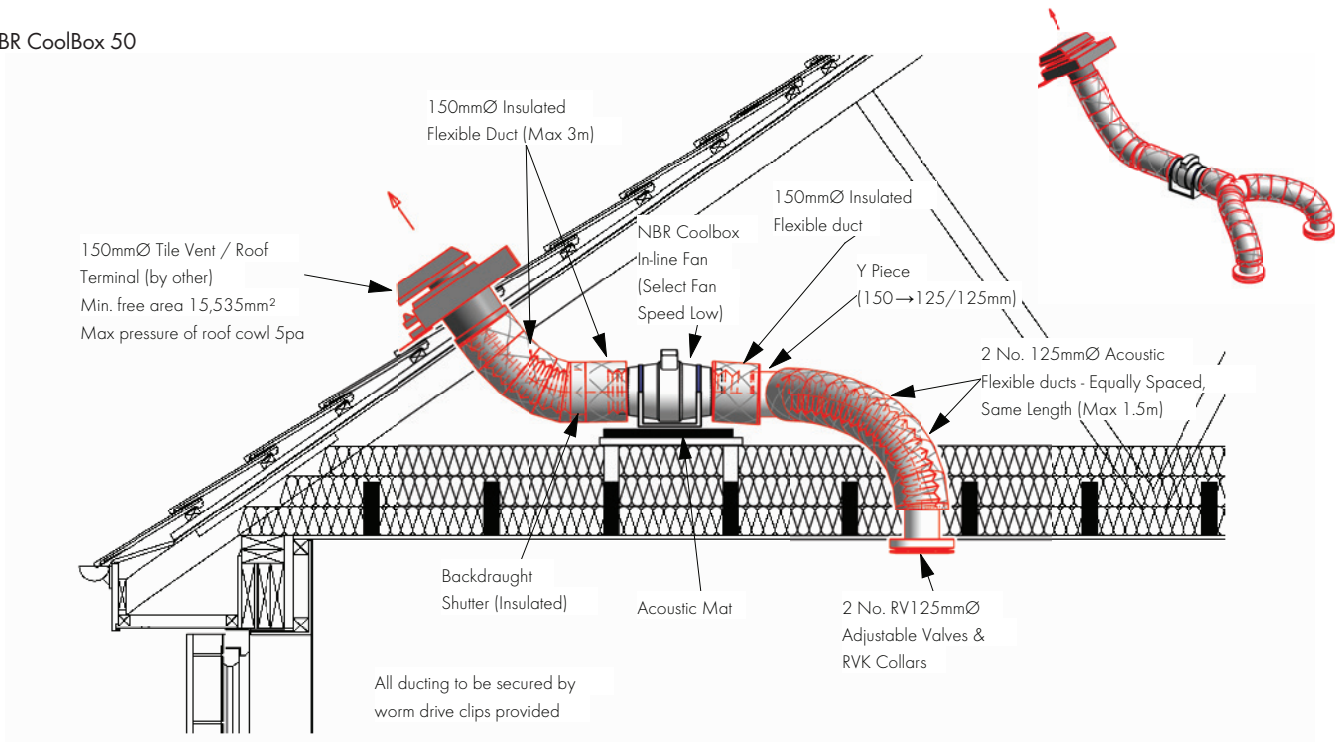

## NBR Passive Duct Kit

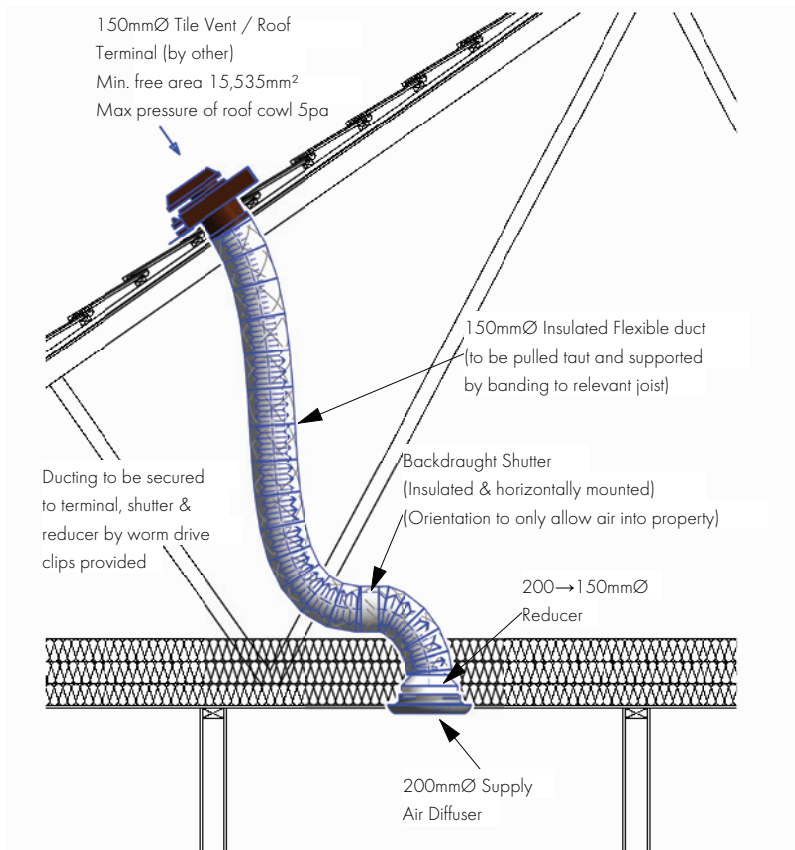



# Acoustic Residential Purge Ventilator

- Rapid local extract
- Satisfies Part F purge requirements
- Acoustically treated for low noise
- Helps to reduce overheating
- Can be used in conjunction with MVHR and MEV units or as standalone system
- 220x90 or 250 diameter spigots
- Low profile design
- Easy setup
- Energy efficient EC fan
- Variable speed control
- Low maintenance requirement



The Vent-Axia Acoustic Purge Fan is used to rapidly remove indoor pollutants as well as reducing the impact of overheating in residential dwellings, providing a more comfortable and healthy internal environment for home-owners.

The Acoustic Purge Fan can be used in conjunction with a Sentinel Kinetic MVHR unit or independently via a separate switched live connection or 0-10V external sensor input. The Acoustic Purge Fan can be installed in habitable rooms to satisfy Approved Document F Purge requirements (4 air changes per hour). The unit can be installed in conjunction with controllable duct dampers and/ or background ventilators to manage the supply air into the dwelling under purge operation.

The Acoustic Purge Fan is specially treated with acoustic foam to reduce breakout and induct noise, ensuring end-user comfort during operation. As well as boasting a low-profile design, the unit utilises 220x90 spigots to allow easy use of flat ducting in tight void spaces in apartments.


## Model

Model	Stock Ref
Acoustic Purge Fan	477988
Acoustic Purge Fan XL	479829

## Accessories


Model	Stock Ref
Remote Speed Control	10520602
Trickle/Boost Controller	475775

## Dimensions (mm)

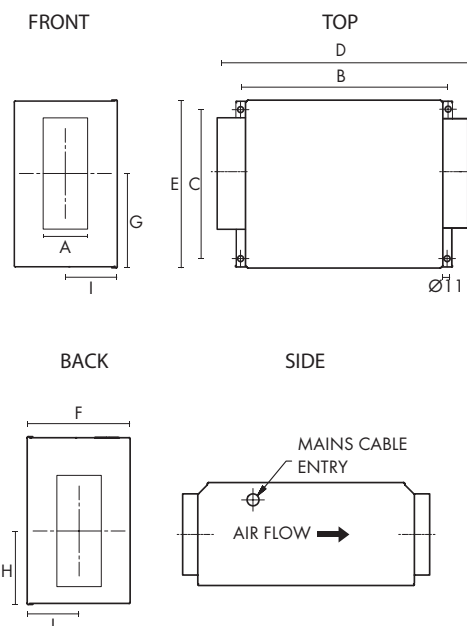

Stock Ref	Spigot	A	B	C	D	E	F	G	H	I	kg
477988	220x90	85	380	275	456	310	191	165	145	103.5	7.5
479829	250Ø	250	435	330	511	364	287	182	122	143	13

# Performance

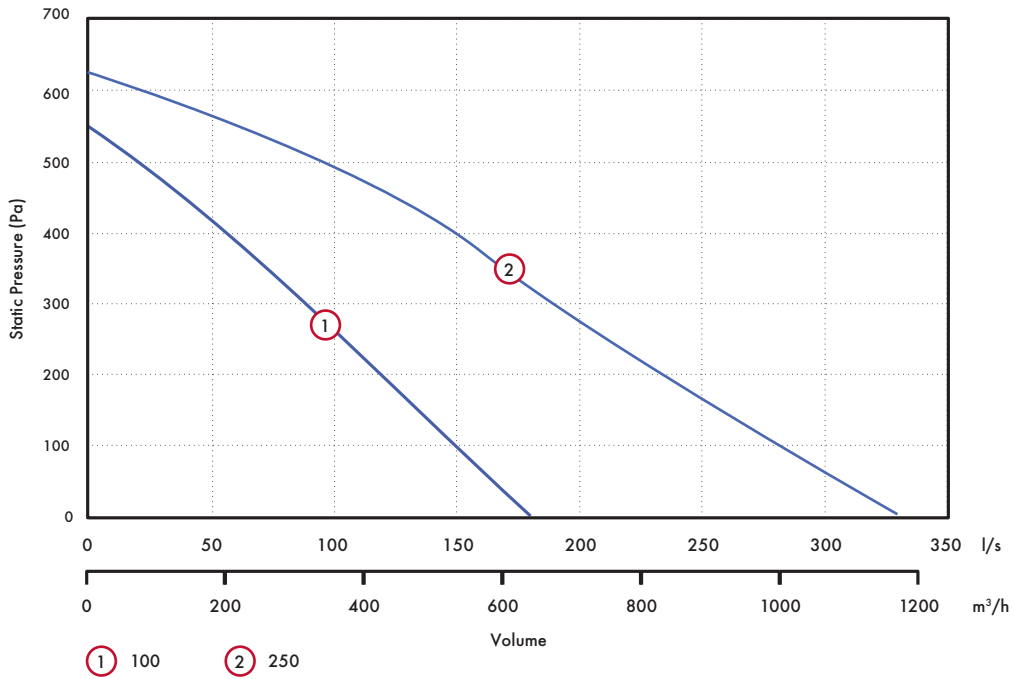

# Sound Data


## Acoustic Purge Fan

Speed	Test mode	Octave Band (Hz) Sound Power Levels, dB								dB(A) @	
		63	125	250	500	1k	2k	4k	8k	LwA	3m
25%	Inlet	35	30	34	32	26	20	18	24	32	15
	Outlet	36	32	36	34	33	28	20	23	37	19
	Breakout	37	34	31	28	24	18	18	23	30	10
50%	Inlet	40	38	51	47	41	38	31	26	48	31
	Outlet	40	44	57	51	50	49	43	31	56	38
	Breakout	43	46	50	46	43	39	32	27	48	27
80%	Inlet	45	45	60	60	52	49	44	40	59	42
	Outlet	50	50	68	65	61	61	56	49	68	50
	Breakout	64	53	57	58	54	50	47	45	59	39
100%	Inlet	55	46	60	61	53	50	45	41	60	43
	Outlet	53	51	65	66	62	63	57	51	68	51
	Breakout	56	54	57	60	56	52	49	47	61	41

## Acoustic Purge Fan XL

Speed	Test mode	Octave Band (Hz) Sound Power Levels, dB								dB(A) @	
		63	125	250	500	1k	2k	4k	8k	LwA	3m
25%	Inlet	48	49	42	38	35	24	24	29	40	22
	Outlet	47	46	41	37	41	29	24	29	42	24
	Breakout	42	42	37	31	29	26	25	31	40	19
50%	Inlet	55	57	65	58	49	43	45	38	57	39
	Outlet	53	57	62	58	54	55	51	36	59	41
	Breakout	52	48	53	43	37	36	34	30	48	27
80%	Inlet	63	65	69	76	62	54	53	49	71	54
	Outlet	63	66	69	72	69	68	62	55	72	54
	Breakout	54	56	57	57	48	46	45	36	57	36
100%	Inlet	68	71	72	80	68	62	59	56	76	58
	Outlet	68	71	70	78	75	75	68	63	78	60
	Breakout	61	63	62	62	55	54	52	45	63	42

# Wiring Diagram

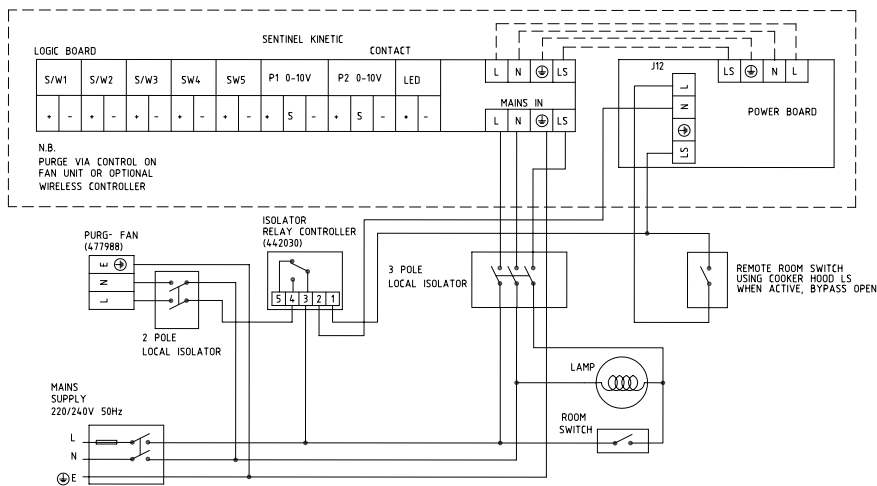

# Lo-Carbon Sentinel Econiq Cool-Flow

- Up to 4.73kW of total cooling provided
- Activated automatically at 25°C to prevent overheating to meet Part O and TM59
- Lowers fresh air supply temperature from ambient temperatures by up to 18°C
- R32 refrigerant with a GWP of 675, 50% lower than R134a
- EER up to 3.77
- App allowing full commissioning and control of activation
- Sentinel-X Wireless Temperature Sensors available
- Best in class SFP's and thermal efficiencies up to 93%
- Sound data independently tested and verified by SRL
- Wall mounted and Floor Standing options available
- Designed with 200mm spigots to provide maximum cooling and minimal noise levels all at low system pressures



Designed to mitigate overheating conditions in the warmer months meeting the requirements of Residential Part O and TM59 standards. Lo-Carbon Sentinel Econiq Cool-Flow is Vent-Axia's latest flagship mechanical ventilation with heat recovery system combined with our Intelligent Econiq Cool-Flow Module. Designed in the UK, it offers the highest level of comfort and functionality all year round.

Vent-Axia's Lo-Carbon Sentinel Econiq Cool-Flow is a self-contained solution designed to fit within a POD or standard utility cupboard. Connection to the unit will be made utilising the 200mm spigots and Vent-Axia's Thermflow ducting which will have a thermal conductivity of no less than 0.038 W/(m·K).

In the cooler months the Lo-Carbon Sentinel Econiq Cool-Flow provides up to 93% Heat Recovery ensuring heating bills are kept to an absolute minimum, in the warmer months our Intelligent 100% summer bypass will ensure free cooling is used wherever possible to ensure the internal comfort temperature is not exceeded.

If the 100% automatic intelligent summer bypass is not able to utilise internal/external free cooling conditions to reduce overheating, Vent-Axia's Lo-Carbon Sentinel Econiq Cool-Flow will automatically detect excessive increase in temperature within the dwelling. This will operate until the internal dwelling comfort temperature is met to ensure the dwelling does not overheat beyond Part O and TM59 parameters or the comfort temperatures set by the user.

Manual boost is also possible for the end user if they wish to override the automatic cooling mode as is the ability to turn then cooling on/off.

## Air Quality and Health

The MVHR filter options offer numerous benefits, including improved indoor air quality by removing allergens and particulate matter. They maintain the system's energy efficiency, reduce heating and cooling costs, and enhance the overall longevity of the system. Additionally, they capture bacteria, viruses and VOCs, promoting a healthier living environment. Regular filter maintenance extends the system's life span and ensures uninterrupted operation.

Whatever the outside environment, the system can help improve the indoor air quality by filtering out impurities, with ISO 60% Coarse (G4) supplied as standard, which can filter out sand, fine hair and particles larger than 10µm. Additional filtration can be achieved with a selection of optional filters, such as ISO ePM10 (M5), which can filter pollen, stone dust and particles smaller or equal to 10µm and ISO ePM2.5 (F7), which can filter out mould spores, bacteria and particles smaller or equal to 2.5µm.

The various sensor options allow for flexible installation in individual rooms, supporting effective management of the air in the home. For example, a wireless temperature sensor located within a habitable room helps ensure a healthy and safe environment. A humidity sensor located in the bathroom detects high levels of moisture can support good indoor air quality. CO<sub>2</sub> sensors can ensure the ppm levels are managed to help promote cognitive function.

## Low Noise Levels

The Lo-Carbon Sentinel Econiq Cool-Flow is one of the quietest combined MVHR and cooling systems on the market. The range is designed with an integral acoustic enclosure, made of steel, foam and expanded polypropylene (EPP), minimising breakout noise. The highly efficient motors are mounted on anti-vibration mounts to mitigate vibration transmission.

## MVHR Demand Control Ventilation

The Vent-Axia Connect smartphone application allows a multitude of functions to be adjusted from the comfort of the sofa, available on iOS and Android. With smartphone-compatible controls, the homeowner is in full control of their ventilation all year round. They have the flexibility to increase the ventilation rate during hot periods in the summer or reducing the speed to minimise running costs while away. The Sentinel control logic built within the MVHR ensures the system operates optimally with automated functions such as frost protection, summer bypass and cooling providing comfort in the home.



The Lo-Carbon Sentinel Econiq is Vent-Axia's latest flagship mechanical ventilation with heat recovery system. Designed and developed in the UK, it offers the highest level of comfort and functionality all year round.

Introducing a full range of products, with air performance suitable for all types of homes, the new Sentinel-X wireless controls platform delivers complete control over the home environment, provided through a full range of wired/wireless sensors and a smartphone app.



### Cooling Unit Control Strategy

The MVHR controller shall automatically switch between heat recovery, summer bypass and active cooling via the Econiq Cool-Flow Module, continuously measuring internal & external temperatures to maintain comfort thresholds efficiently. The Econiq Cool-Flow Module can only be activated if both MVHR fans are running. In addition to the standard automatic cooling, provision shall also be made to allow active cooling to be disabled and enabled:

- Cooling permanently switched off - the user may choose to isolate the Econiq Cool-Flow Module from the mains. As such the power supply should be monitored so as to not flag a fault under these (intentional) conditions
- Cooling disabled off by schedule - the user may choose either a weekly or databased schedule (e.g. Holiday mode) to prevent Econiq Cool-Flow Module to be active for the duration.
- Cooling enabled user override - Such as using a switch input on the MVHR overriding demand for cooling regardless of settings/schedules. The cooling unit will have additional temperature sensors built-in and flow rates may be increased automatically to ensure internal component temperatures are not exceeded, Econiq Cool-Flow Module may be temporarily disabled for a period to allow the compressor to cool down in extreme cases.

### A Whole New Experience

The highly sculpted interior surfaces, designed using the latest CFD techniques, ensure airflows are maximised through the unit, minimising noise and energy use. This feature alone provides an experience, that will delight homeowners, providing the most discrete and highly efficient ventilation available.

### Integral Humidity Sensor

The integral humidity sensor increases speed in proportion to relative humidity levels, saving energy and reducing noise. The sensor also reacts to small but rapid increases in humidity, even if the normal trigger threshold is not reached. This unique feature ensures adequate ventilation, even for the smallest wet room. The nighttime relative humidity setback feature suppresses nuisance tripping as humidity gradually increases with falling temperatures.

### Model

Description	Stock Ref
Sentinel Econiq Cool-Flow with Wall Mounted Kit	413887
Sentinel Econiq Cool-Flow with Floor Mounted Kit	413888

### Accessories

Description	Stock Ref
Wall Mounting Kit for Controller	411628

### Control/Sensor Overview

Power	Colour	CO <sub>2</sub>	PIR	Temp.	Humidity	Wireless	4 Speed Switch	Stock Ref
Battery	White			✓	✓	✓		496431
Battery	White			✓	✓	✓	✓	496437
Battery	Black			✓	✓	✓	✓	497689
0-10V	White	✓		✓	✓			496432
240V	White			✓	✓	✓		496429
240V	White	✓		✓	✓	✓		496433
240V	White		✓			✓		496438
240V	White			✓	✓	✓	✓	496620
240V	Black			✓	✓	✓	✓	497693
240V	White			✓	✓		✓	496621
240V	Black			✓	✓		✓	497697

### Spare Filters

Description	Stock Ref
ISO 60% Coarse (G4) Filter 2 per Pack	411690
ISO ePM10 50% (M5) Filter 1 per Pack	411691
ISO ePM2.5 70% (F7) Filter 1 per Pack	411692


### SEC Class

Model	SEC Class
Econiq L	A+


### SAP PCDB Test Results (Econiq L)

	Thermal Efficiency %	SFP (W/l/s)
K+1	93	0.56
K+2	93	0.53
K+3	93	0.56
K+4	92	0.62
K+5	91	0.72
K+6	91	0.84
K+7	90	1.01

### Spigot Configuration

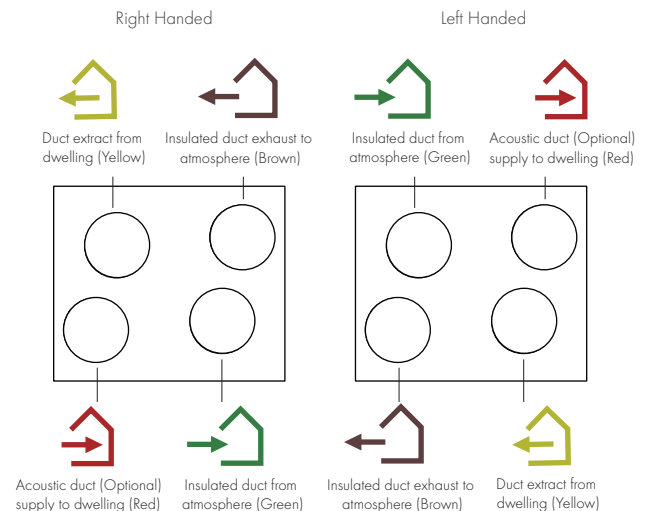

# Performance

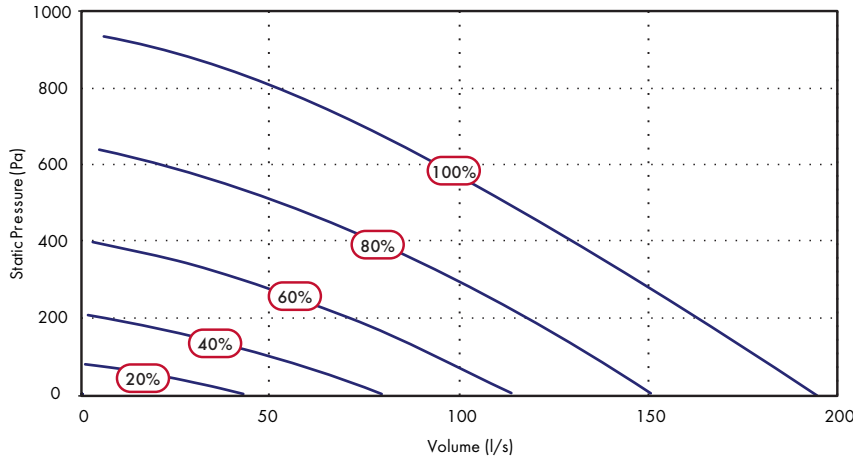

Please note: The Econiq Cool-Flow Module must have a minimum of 80 l/s from the MVHR to ensure components do not overheat. 20% and 40% fan curves are only to be used for the MVHR running without cooling.

Outside Temp (°C)	RH	Inside Temp (°C)	RH	Airflow (l/s)	80	90	100	110	120	130	140	150	160
34	50	26	45	Supply Temp (°C)	17.7	17.7	17.8	18.0	18.2	18.4	18.6	18.7	18.8
				Sensible Cooling (kW)	1.60	1.80	1.99	2.17	2.34	2.50	2.66	2.82	3.00
				Total Cooling (kW)	2.66	2.99	3.28	3.53	3.73	3.89	4.04	4.20	4.44
		25	45	Supply Temp (°C)	17.2	17.2	17.4	17.6	17.9	18.0	18.1	18.3	18.6
				Sensible Cooling (kW)	1.65	1.86	2.04	2.21	2.38	2.55	2.73	2.89	3.02
				Total Cooling (kW)	2.72	3.08	3.35	3.55	3.72	3.87	4.02	4.20	4.42
	24	50	Supply Temp (°C)	16.8	17.1	17.3	17.4	17.6	17.8	18.0	18.1	18.3	
			Sensible Cooling (kW)	1.69	1.86	2.05	2.24	2.42	2.59	2.76	2.92	3.08	
			Total Cooling (kW)	2.81	3.09	3.33	3.55	3.78	4.01	4.24	4.44	4.57	
	23	50	Supply Temp (°C)	16.5	16.4	16.5	16.7	17.0	17.2	17.4	17.6	17.9	
			Sensible Cooling (kW)	1.71	1.96	2.16	2.34	2.51	2.68	2.85	3.01	3.16	
			Total Cooling (kW)	2.87	3.26	3.57	3.85	4.12	4.37	4.59	4.73	4.73	

Outside Temp (°C)	RH	Inside Temp (°C)	RH	Airflow (l/s)	80	90	100	110	120	130	140	150	160
32	50	26	45	Supply Temp (°C)	16.2	16.4	16.6	16.8	16.9	17.0	17.1	17.3	17.7
				Sensible Cooling (kW)	1.56	1.74	1.90	2.06	2.22	2.39	2.55	2.70	2.83
				Total Cooling (kW)	2.32	2.60	2.88	3.13	3.35	3.54	3.69	3.81	3.90
		25	45	Supply Temp (°C)	16.0	16.1	16.3	16.4	16.6	16.8	16.9	17.0	17.1
				Sensible Cooling (kW)	1.57	1.76	1.93	2.10	2.27	2.44	2.61	2.77	2.91
				Total Cooling (kW)	2.41	2.69	2.92	3.12	3.33	3.53	3.73	3.90	4.01
	24	50	Supply Temp (°C)	15.7	15.7	15.8	16.0	16.1	16.3	16.5	16.7	16.9	
			Sensible Cooling (kW)	1.60	1.80	1.98	2.15	2.33	2.50	2.68	2.84	2.98	
			Total Cooling (kW)	2.49	2.82	3.08	3.31	3.51	3.71	3.90	4.07	4.19	
	23	50	Supply Temp (°C)	15.5	15.7	15.8	15.9	16.1	16.2	16.3	16.5	16.7	
			Sensible Cooling (kW)	1.62	1.81	2.00	2.19	2.38	2.56	2.73	2.88	3.02	
			Total Cooling (kW)	2.65	2.95	3.20	3.44	3.68	3.92	4.14	4.28	4.28	

Outside Temp (°C)	RH	Inside Temp (°C)	RH	Airflow (l/s)	80	90	100	110	120	130	140	150	160
29	50	26	45	Supply Temp (°C)	14.9	14.9	15.0	15.1	15.3	15.5	15.7	15.8	16.0
				Sensible Cooling (kW)	1.39	1.55	1.71	1.87	2.02	2.16	2.29	2.43	2.56
				Total Cooling (kW)	1.93	2.11	2.35	2.60	2.81	2.97	3.09	3.19	3.33
		25	45	Supply Temp (°C)	14.3	14.3	14.4	14.6	14.8	14.9	15.1	15.3	15.6
				Sensible Cooling (kW)	1.44	1.64	1.82	1.99	2.13	2.27	2.39	2.51	2.65
				Total Cooling (kW)	2.09	2.36	2.61	2.82	3.00	3.14	3.26	3.35	3.44
	24	50	Supply Temp (°C)	14.0	14.0	14.1	14.3	14.5	14.7	14.9	15.0	15.1	
			Sensible Cooling (kW)	1.47	1.66	1.83	1.98	2.13	2.28	2.42	2.57	2.73	
			Total Cooling (kW)	2.19	2.44	2.68	2.90	3.09	3.26	3.41	3.56	3.71	
	23	50	Supply Temp (°C)	13.5	13.4	13.5	13.7	14.0	14.2	14.3	14.5	14.7	
			Sensible Cooling (kW)	1.53	1.73	1.90	2.06	2.22	2.37	2.53	2.68	2.82	
			Total Cooling (kW)	2.28	2.61	2.84	3.03	3.20	3.37	3.54	3.70	3.81	

## Sound Data (Sentinel Econiq Cool-Flow)


Conditions (Summer Bypass Closed)			Sound Pressure dB(A)										
Airflow (l/s)	Supply Speed (%)	Extract Speed (%)	Test Mode	Octave Band (Hz)								Lw(A)	Lp(A) @ 3m
				63	125	250	500	1k	2k	4k	8k		
83	53	51	Supply	66.6	62.5	61.3	56.1	53.7	47.3	37.5	28.1	58.8	41.3
			Extract	67.4	53	52.8	41.5	40.9	32.7	25.7	23.7	47.9	30.4
			Breakout	62	56.4	57.6	46.9	46.5	38.9	30.5	26.2	52.4	31.9
102	64	61	Supply	66.5	64.5	67.3	62	57.1	51.8	41.5	30.7	63.7	46.2
			Extract	70.9	56	54.2	43.8	42.5	35.5	28.5	24.5	50	32.5
			Breakout	61.3	59.7	56.7	51.3	49.3	43	35.3	29.3	54.3	33.8
111	74	71	Supply	67.7	66.4	62.4	66.6	59	54.3	44.9	33.8	65.4	47.9
			Extract	71.1	56.8	53.6	46.6	43.1	37.1	29	26.4	50.5	33
			Breakout	61.7	62.3	56.3	58	51	45.6	36.5	29.4	57.2	36.7
132	77	77	Supply	68.2	67.5	63	68.3	59.9	55.8	47.1	35.7	66.9	49.4
			Extract	71.4	57.5	55	48.5	44.8	38.9	30.5	25.8	51.8	34.3
			Breakout	62.3	61.8	56.6	59.6	52.2	47	37.7	29	58.2	37.7
139	88	84	Supply	70.1	68.9	65	69.7	62.1	58.2	51.1	40	68.7	51.2
			Extract	70.9	59.5	55.4	51	46.6	40.8	33.7	26.3	53.2	35.7
			Breakout	64.1	63.7	57.5	57.9	53.6	49	41.1	31.9	58.7	38.2
167	100	100	Supply	79.7	72.7	67.2	71.5	64.6	60.8	55.5	44.8	71.2	53.7
			Extract	76	63.1	57.8	52.5	49.2	43.8	38.2	27.2	56.1	38.6
			Breakout	68.7	66.4	58.8	62.4	57.2	52.3	45.9	34.7	62.8	42.3

## Sound Data (Sentinel Econiq L MVHR only)

Speed	Test mode	Octave Band (Hz) Sound Power Levels, dB								SPL dB(A) @ 3m	
		63	125	250	500	1k	2k	4k	8k		LwA
20%	Supply	52.9	50.9	46.8	43.0	34.6	27.1	19.2	25.4	43.9	26.4
	Extract	50.3	49.0	36.0	31.5	23.6	16.1	18.9	25.3	36.4	18.9
	Breakout	34.6	34.8	35.7	34.9	29.6	25.1	21.0	25.3	36.0	15.5
40%	Supply	59.5	56.5	59.4	55.0	48.2	42.6	31.8	26.1	55.9	38.4
	Extract	51.9	51.3	50.4	41.2	35.0	25.3	19.8	25.4	44.8	27.3
	Breakout	40.2	42.6	46.5	45.4	41.0	36.2	25.5	25.3	46.5	26.0
60%	Supply	66.9	62.4	63.3	62.0	57.9	53.5	43.4	34.2	63.2	45.7
	Extract	60.6	60.3	54.2	49.5	44.4	36.2	27.9	26.3	51.7	34.2
	Breakout	45.5	49.8	52.5	53.1	49.7	46.7	36.2	26.9	54.5	34.0
80%	Supply	82.4	67.6	65.2	67.6	64.2	60.8	50.8	43.2	69.2	51.7
	Extract	75.5	68.6	59.3	56.0	48.3	44.2	36.9	31.3	58.6	41.1
	Breakout	59.2	55.0	56.8	60.0	55.4	53.9	44.1	33.4	61.0	40.5
100%	Supply	79.4	69.6	66.6	75.1	64.9	63.6	53.4	45.7	73.7	56.2
	Extract	72.4	70.5	60.5	56.4	49.8	46.3	39.0	33.4	59.5	42.0
	Breakout	63.0	57.1	58.5	63.7	56.8	55.9	46.4	36.2	63.5	43.0

## Unit Dimensions (mm)


Econiq Cool-Flow Module Weight: 50kg. Total Solution Weight: 96kg (including MVHR unit).

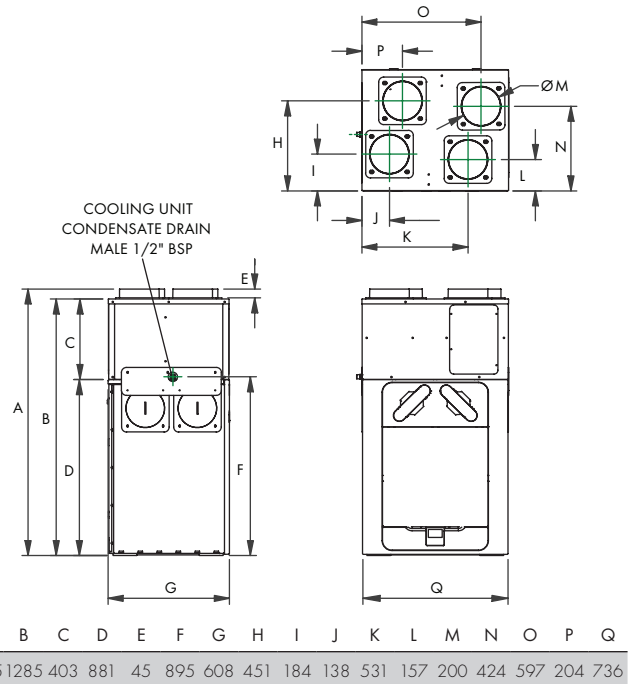


Wiring connections front and back, allowing LH & RH fitting by rotating unit 180deg

## Mounting Dimensions (mm)

Wall

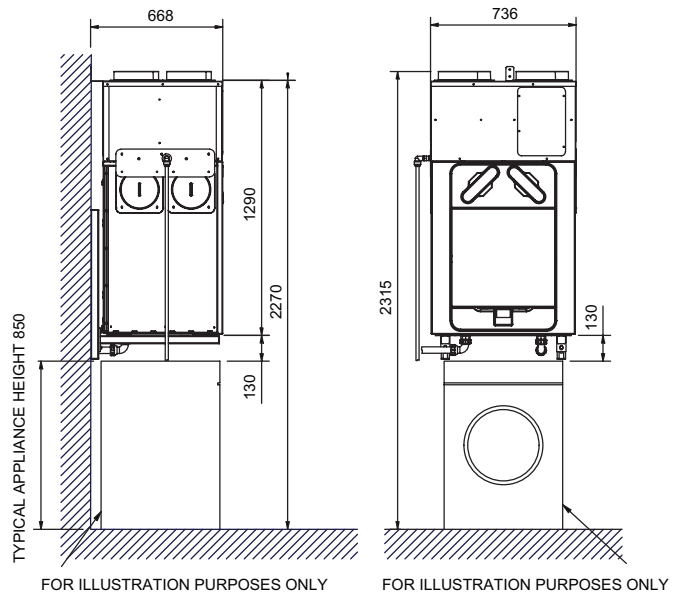

Floor

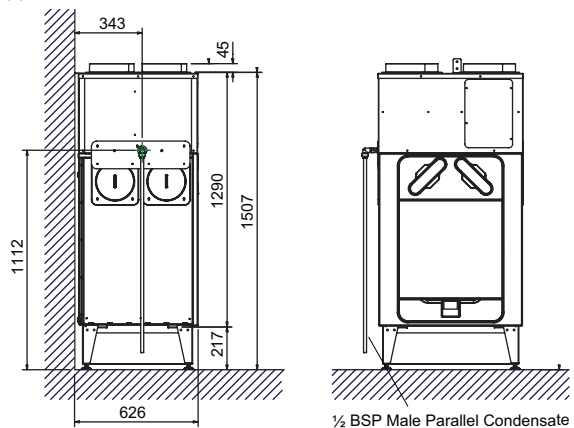

## MVHR Overview

	Sentinel Econiq L
Recommended max system flow	167 l/s @ 150 Pa
Part F Compliant App Commissioning Certificate	✓
RF858 connectivity, 802.11b/g/n WiFi and Bluetooth low energy 4.2	✓
Spigot Options	Vertical Only
Spigot size	200mm
Left/Right Hand Orientation Through Control	✓
Fully automatic 100% summer bypass	✓
Active Frost Protection to -20°C	✓
Fault Code Indicator	✓
Easy Access Filters: ISO Coarse 65% (G4)	✓
Easy Access Filters: ISO ePM10 50% (M5)	○
Easy Access Filters: ISO ePM2.5 70% (F7)	○
Clean Filter Indicator (Time frame)	✓
PIN Number Lock	✓
Running Time Indicator	✓
Enthalpy Heat Exchanger	○
Soft-Start Boost	✓
Delay-On	✓
Number of controllable speeds	4
Installer function to copy/load unit setup	✓
Inputs 2 x 0-10V; 2 x LS; 5 x Volt-Free	✓
Integral Humidistat	✓
Relay outputs - For example control heaters or geothermal heat exchanger	○
BMS - modbus supported over RS485	✓
Operating ambient temperature (°C)	-20 to +40
Operating Humidity (%RH)	0 to 95
Mounting	Wall or Floor
Maintenance access	From Front

○ - Denote Optional

## Econiq Cool-Flow Module Overview

Up to 4.73kW of total cooling provided	✓
Activated automatically at 25°C to prevent overheating to meet Part O and TM59	✓
Utilising R32 refrigerant providing a GWP of 675	✓
EER up to 3.77	✓
Lowers incoming air by up to 18°C	✓



## Consultant's Specification

### Specification - Econiq Cool-Flow Module

The Econiq Cool-Flow Module shall be manufactured with a RAL 9003 powder coated mild steel outer case construction and be fully insulated for thermal and acoustic performance.

The unit shall have easy access to the front of the unit via the access panel for access to Controls (including Control PCBA, Run Capacitor, Relay and connections board).

The Econiq Cool-Flow Module shall include a factory fitted gasket creating an airtight seal with the MVHR. The Econiq Cool-Flow Module shall also be supplied with mounting brackets to mechanically fix the Econiq Cool-Flow Module to the MVHR along with an upper bracket to be fitted between the Econiq Cool-Flow Module and the wall, ensuring unit stability.

The maximum weight of the combined solution shall not exceed 100kg for the Econiq Cool-Flow Module and MVHR combined, the Lo-Carbon Sentinel Econiq Cool-Flow.

The MVHR and Cooling module assembly shall be supported on the specific floor-mounting stand or specific prefabricated steel brackets.

The Vent-Axia Econiq Cool-Flow Module shall operate in unison with the MVHR unit and never independently.

The Econiq Cool-Flow Module shall provide up to 4.73kW of total cooling, and utilise R32 refrigerant providing a GWP of 675 whilst providing an EER of up to 3.77.

The Lo-Carbon Sentinel Econiq Cool-Flow shall be capable of lowering fresh air supply temperature by up to 18°C.

The Econiq Cool-Flow Module shall be supplied with a two year (parts only) warranty.

Connection to the unit will be made at the 200mm spigots utilising Vent-Axia Thermflow ducting which will have a thermal conductivity of no less than 0.038 W/(m·K).

Condensate Connection will be via the single side which is a LH condensate as standard utilising ½ BSP Parallel, Male threaded connection.

All ducting throughout the system to be fully insulated

### Specification - MVHR Unit

The Mechanical Ventilation Heat Recovery Unit shall be the Lo-Carbon Sentinel Econiq L as manufactured by Vent-Axia. It should be sized as indicated on the drawings and shall be in accordance with the particular specification.

The unit shall be fully insulated for thermal and acoustic performance and shall incorporate a high-efficiency composite plastic counter-flow heat exchanger with an independently verified thermal efficiency of up to 93% when tested to EN 308.

The heat exchanger shall be protected by ISO 60% Coarse (G4) grade filters on both exhaust and supply with the facility to accommodate ISO ePM10 (M5), ePM2.5 (F7) or an inline filter such as the Vent-Axia Pure Air Carbon Filter. The built-in filters shall be accessible via tool-free access doors. The heat exchanger, motors, summer bypass and all other serviceable parts shall be accessible through the front of the unit.

The Lo-Carbon Sentinel Econiq L shall automatically vary the ventilation rate via EC/DC motors, as it receives signals from optional or in-built sensor inputs. When a signal is received, the fans shall either vary their speed proportionally or on a normal/boost principle. The unit shall have the facility to commission the supply and extract fans individually via in-built minimum and maximum speed adjustment, alternative wired remote-control unit or via a compatible smartphone using the Vent-Axia Connect application. The fans themselves shall have independent, infinitely variable speed control.

The MVHR unit shall be manufactured with an ABS Outer case construction and an Expanded Polystyrene (EPS) inner chassis with custom motor and impeller mounting features. The inner chassis will assist in reducing noise and act as a large anti-vibration mount avoiding transmission through to the back mounting plate or the base of the unit. The MVHR unit shall be tested to ensure it meets the maximum allowable vibration of no more than 1 mm/s, measured on the unit wall fixing points.

The unit shall have a fully automatic 100% summer bypass, integral minimum and maximum infinitely variable speed controls with fascia mounted failure indication. The unit shall have low-energy, high efficiency EC/DC fan/motor assemblies with sealed for life bearings. The impellers shall be high-efficiency backward curved centrifugal type, achieving an SFP as low as 0.38W/l/s [EN 308].

The unit shall have two condensate drain outlets for handing to be defined onsite and during commissioning. The unit shall have wireless control capability options, using RF868 connectivity, 802.11b/g/n Wi-Fi and Bluetooth low energy 4.2. The unit shall use RF868 to connect to a wide ecosystem of wireless sensors including but not limited to CO<sub>2</sub>, temperature, and relative humidity. The unit shall be able to engage Wi-Fi to

connect to local devices and create a local area network to allow for a larger network to be created for commissioning. The unit shall have Bluetooth low energy 4.2 to allow connectivity onto compatible smartphone devices. The unit shall be constructed with a removable tool free front panel which gives access to the removable on-board controller and other accessories. The EPS panel can then be removed with 4 screws allowing full maintenance access. This shall provide access to the following:

- ✓ Supply or extract fan
- ✓ Heat exchanger
- ✓ Access to the electrical connections

Access shall be provided for wiring termination and setup/commissioning. The unit can be supplied with either a backlit user interface or a blank plate, both of which shall be removable for remote mounting if required. Filters shall be accessed via the two filter drawers found near the top of the unit, the S shall have filter drawers and the M and L shall have filter caps.

Units shall be manufactured by Vent-Axia Ltd.

### Standard MVHR Controls

The Lo-Carbon Sentinel Econiq L shall incorporate the following functions through a user interface fitted by the manufacturer or a paired smartphone with the Vent-Axia Connect application:

- ✓ Integral infinitely variable fan speed control on supply and extract.
- ✓ 6 speeds; 4 adjustable
- ✓ Left or Right hand spigot configuration, programmable during commissioning
- ✓ Tool free filter access
- ✓ Integral BMS interfaces - control and status indication
- ✓ Heating interlocks
- ✓ 24V external sensor supply, e.g. PIR sensor
- ✓ 0-10V proportional speed adjustment
- ✓ Volt free contacts
- ✓ Fully automatic summer bypass
- ✓ Filter check facility
- ✓ Control panel PIN number lock

The unit shall incorporate:

- ✓ An integral humidity sensor with the following features: Ambient Response; Raises the humidity trigger point as dwelling temperature reduces.
- ✓ Rapid Response: Monitors the rate of change in humidity and triggers increased airflow even if the humidity trigger threshold is not reached.
- ✓ Proportional Response; incrementally increases the fan speed to reduce noise and reduce energy consumption.
- ✓ RS485 connectivity - Long distance cabling to support multiple sensor connections.
- ✓ RF868 connectivity - Radio reference 868 MHz for multiple wireless sensors pairing Bluetooth low energy 4.2 - Enable pairing within compatible smartphone device
- ✓ 802.11b/g/n Wi-Fi - Enable localised access point or connect to the local area network using the Vent-Axia Connect application, via a compatible smartphone device
- ✓ The unit shall incorporate an automatic 100% summer bypass damper which monitors internal and external temperatures to maintain the user comfort temperature (default 25°C): -
- ✓ 'Evening Fresh' turns the unit to maximum speed with the bypass operational for 2 hours or until the user comfort temperature is reached (default 25°C).
- ✓ 'Night Time Fresh' will run the unit at maximum speed with the bypass operational throughout the night or until the dwelling reaches minimum temperature (default 14°C).

Independently acoustically tested to BS EN 13141-7:2010

### Econiq Cool-Flow Module Controls

The MVHR controller shall automatically switch between heat recovery, summer bypass and active cooling via the Econiq Cool-Flow Module, continuously measuring internal & external temperatures to maintain comfort thresholds efficiently. The Econiq Cool-Flow Module can only be activated if both MVHR fans are running.

In addition to the standard automatic cooling, provision shall also be made to allow active cooling to be disabled and enabled:

- ✓ Cooling permanently switched off - the user may choose to isolate the Econiq Cool-Flow Module from the mains. As such the power supply should be monitored so as to not flag a fault under these (intentional) conditions
- ✓ Cooling disabled off by schedule - the user may choose either a weekly or date-based schedule (e.g. holiday mode) to prevent Econiq Cool-Flow Module to be active for the duration.
- ✓ Cooling enabled user override - Such as using a switch input on the MVHR overriding demand for cooling regardless of settings/schedules.

The Econiq Cool-Flow Module will have additional temperature sensors built-in and flow rates may be increased automatically to ensure internal component temperatures are not exceeded, Econiq Cool-Flow Module may be temporarily disabled for a period to allow the compressor to cool down in extreme cases.

# Sentinel-X Controllers

## Battery Controllers & Sensors



### Battery - Internal Temperature and Humidity - Wireless

Room mounted humidity and temperature sensor for wired or wireless communication with a compatible system. Using an in-built RF 868 MHz (Wireless radio frequency), or RS485 (Wired connection) communication method whilst being powered by batteries.

- Dimensions (HxWxD) (mm) 60 x 60 x 22
- 2 x AAA Batteries included
- Temperature range 0~60°C
- Relative humidity range 0-90% RH
- Wireless range 20m closed/100m open
- RF 868MHz Wireless or RS485 Wired communication
- Status LED indicator for pairing, health check and fault conditions
- Mounted using provided back plate

Stock Ref

496431



### Battery - 4 Speed Switch with Temperature and Humidity - Wireless

Room mounted Speed Switch for wireless communication with a compatible system. Using an in-built RF 868 MHz (Wireless radio frequency) communication whilst being powered by batteries.

- Dimensions (HxWxD) (mm) 90 x 90 x 17
- 2 x AAA Batteries included
- Temperature range 0~60°C
- Relative humidity range 0-90% RH
- Wireless range 20m closed/100m open
- RF 868MHz Wireless
- Mounted using provided back plate or compatible with a standard single gang or surface mounted pattress box
- Status LED indicator for pairing, health check and fault conditions

Model

Stock Ref

White

496437

Black

497689

## HMI Kit



### Wall-mounted HMI Kit to suit Econiq models with full HMI

Includes HMI Blank controller, HMI backplate and cable.

- Dimensions (HxWxD) (mm) 90 x 90 x 17
- Power supply 240V
- Wireless range 20m closed/100m open
- RF 868MHz Wireless or RS485 Wired communication
- Compatible with standard single gang or surface mounted pattress box

Stock Ref

411628

## 24V Sensor



### 0-10V CO<sub>2</sub>, Temperature and Humidity - Wired

Room mounted CO<sub>2</sub> sensor with 0-10V signal output powered by an external 24V supply.

- Dimensions (HxWxD) (mm) 90 x 90 x 17
- 24V Power supply required
- Temperature range 0~60°C
- Relative humidity range 0-90% RH
- CO<sub>2</sub> range 0-2000PPM
- Compatible with standard single gang or surface mounted pattress box
- Status LED indicator for pairing, health check, faults & air quality traffic light index
- 0-10V Wired Communication

Stock Ref

496432

# Sentinel-X Controllers

## 240V Controllers & Sensors



### 240V - Internal Temperature and Humidity - Wireless

Room mounted humidity and temperature sensor for wired or wireless communication with a compatible system. Using an in-built RF 868 MHz (Wireless radio frequency), or RS485 (Wired connection) communication method whilst being powered by a local 240V supply.

- Dimensions (HxWxD) (mm) 90 x 90 x 17
- Power supply 240V
- Temperature range 0~60°C
- Relative humidity range 0-90% RH
- Wireless range 20m closed/100m open
- RF 868MHz Wireless or RS485 Wired communication
- Compatible with standard single gang or surface mounted pattress box
- Status LED indicator for pairing, health check, faults & air quality traffic light index

Stock Ref  
**496429**



### 240V - CO<sub>2</sub>, Temperature and Humidity - Wireless

Room mounted CO<sub>2</sub> sensor for wired or wireless communication with a compatible system. Using an in-built RF 868 MHz (Wireless radio frequency), or RS485 (Wired connection) communication method whilst being powered by a local 240V supply.

- Dimensions (HxWxD) (mm) 90 x 90 x 17
- Power supply 240V
- Temperature range 0~60°C
- Relative humidity range 0-90% RH
- CO<sub>2</sub> Range 0-2000 PPM
- Wireless range 20m closed/100m open
- RF 868MHz Wireless or RS485 Wired communication
- Compatible with standard single gang or surface mounted pattress box
- Status LED indicator for pairing, health check, faults & air quality traffic light index

Stock Ref  
**496433**



### 240V - 4 Speed Switch with Temperature and Humidity - Wired

Room mounted Speed Switch for wired communication with a compatible system. Using an in-built RS485 communication method powered by a local 240V supply.

- Dimensions (HxWxD) (mm) 90 x 90 x 17
- Power Supply 240V
- Temperature range 0~60°C
- Relative humidity range 0-90% RH
- Mounted using provided back plate or compatible with standard single gang or surface mounted pattress box
- Status LED indicator for pairing, health check and fault conditions
- RS485 Wired Connection

Model  
White  
Black

Stock Ref  
**496621**  
**497697**



### 240V - 4 Speed Switch with Temperature and Humidity - Wireless

Room mounted Speed Switch for wireless communication with a compatible system. Using an in-built RF 868 MHz (Wireless radio frequency) communication whilst being powered by a local 240V supply.

- Dimensions (HxWxD) (mm) 90 x 90 x 17
- Power Supply 240V
- Temperature range 0~60°C
- Relative humidity range 0-90% RH
- Wireless range 20m closed/100m open
- RF 868MHz Wireless
- Mounted using provided back plate or compatible with standard single gang or surface mounted pattress box
- Status LED indicator for pairing, health check and fault conditions

Model  
White  
Black

Stock Ref  
**496620**  
**497693**



### 240V - PIR Sensor - Wireless

Room mounted PIR sensor for wired or wireless communication with a compatible system. Using an in-built RF 868 MHz (Wireless radio frequency), or RS485 (Wired connection) communication method whilst being powered by a local 240V supply. Room mounted presence detector for min/max or on/off control. Wall or ceiling mounting.

- Dimensions (HxWxD) (mm) 90 x 90 x 17
- Power supply 240V
- 5-25min run on timer
- PIR Range 3m
- Compatible with standard single gang or surface mounted pattress box
- Wireless range 20m closed/100m open
- RF 868MHz Wireless or RS485 Wired communication

Stock Ref  
**496438**

# Lo-Carbon Sentinel Econiq-Cool (KERS)

- Additional controls for communication with KERS Coolboost Heat Pump
- Best in class SFP's and thermal efficiencies up to 93%
- Approved Document F aligned commissioning wizard
- New Sentinel-X wireless control platform
- Intelligent smart app control as standard
- Horizontal duct option for space-saving installations (L only)
- ISO ePM10 (M5) and ePM2.5 (F7) filtration options
- Sound levels as low as 15.5 dB(A) breakout - independently tested and verified by SRL
- Left/right handing via controls
- Developed and manufactured in the UK



The Lo-Carbon Sentinel Econiq-Cool is Vent-Axia's latest flagship mechanical ventilation with heat recovery system with all new controls allowing communication with the KERS Coolboost Heat Pump.

The unit incorporates a fully automatic 100% summer bypass damper which monitors internal and external temperatures to maintain the user comfort temperature (default 25°C)

If the MVHR can't provide a lower temperature air from outside to negate the comfort temperature being above the set temperature, it will send a signal to the KERS Coolboost to request cooling.

This will then combine the air flow from the MVHR and KERS Coolboost Heat Pump via built in dampers from the KERS system.

All cooling is managed by the KERS Coolboost Heat Pump.

Designed and developed in the UK, it offers the highest level of comfort and functionality all year round.

Introducing a full range of products, with air performance suitable for all types of homes, the new Sentinel-X wireless controls platform delivers complete control over the home environment, provided through a full range of wired/wireless sensors and a smartphone app.

---

## A Whole New Experience

The highly sculpted interior surfaces, designed using the latest CFD techniques, ensure airflows are maximised through the unit, minimising noise and energy use. This feature alone provides an experience, that will delight homeowners, providing the most discrete and highly efficient ventilation available.

---

## Air Quality and Health

The MVHR filter options offer numerous benefits, including improved indoor air quality by removing allergens and particulate matter. They maintain the system's energy efficiency, reduce heating and cooling costs, and enhance the overall longevity of the system. Additionally, they capture bacteria,

viruses and VOCs, promoting a healthier living environment. Regular filter maintenance extends the system's lifespan and ensures uninterrupted operation.

Whatever the outside environment, the system can help improve the indoor air quality by filtering out impurities, with ISO 60% Coarse (G4) supplied as standard, which can filter out sand, fine hair and particles larger than 10µm. Additional filtration can be achieved with a selection of optional filters, such as ISO ePM10 (M5), which can filter pollen, stone dust and particles smaller or equal to 10µm and ISO ePM2.5 (F7), which can filter out mould spores, bacteria and particles smaller or equal to 2.5µm.

The various sensor options allow for flexible installation in individual rooms, supporting effective management of the air in the home. For example, a CO<sub>2</sub> sensor located within a habitable room helps ensure a healthy and safe working environment. CO<sub>2</sub> levels managed at less than 1000ppm help promote cognitive function. A humidity sensor located in the bathroom detects high levels of moisture can support good indoor air quality.

---

## Low Noise Levels

The Lo-Carbon Sentinel Econiq-Cool is one of the quietest systems on the market, with a noise level as low as 15.5 dB(A). The range is designed with an integral acoustic enclosure, made of steel, foam and expanded polypropylene (EPP), minimising breakout noise. The highly efficient motors are mounted on anti-vibration mounts to ensure minimal vibration

---

## Integral Humidity Sensor


The integral humidity sensor increases speed in proportion to relative humidity levels, saving energy and reducing noise. The sensor also reacts to small but rapid increases in humidity, even if the normal trigger threshold is not reached. This unique feature ensures adequate ventilation, even for the smallest wet room. The nighttime relative humidity setback feature suppresses nuisance tripping as humidity gradually increases with falling temperatures.

---

## Demand Control Ventilation

The Vent-Axia Connect smartphone application allows a multitude of functions to be adjusted from the comfort of the sofa, available on iOS and Android.

With smartphone-compatible controls, the homeowner is in full control of their ventilation all year round. They have the flexibility to increase the ventilation rate during hot periods in the summer or reducing the speed to minimise running costs while away.



The Sentinel control logic built within the MVHR ensures the system operates optimally with automated functions such as frost protection and summer bypass, providing comfort in the home.



## Airtight Buildings

Low-energy buildings typically have very low leakage rates (below 3m<sup>3</sup>/(h.m<sup>2</sup>) at 50Pa). This reduces the effectiveness of the standard frost protection strategy which imbalances the airflows.

## Spigot Options (L only)

The inclusion of horizontal spigots allows for flexible installation in tight spaces. It is possible to use both vertical and horizontal connections.

### Model

Description	Stock Ref
Sentinel Econiq-Cool S (KERS)	412380
Sentinel Econiq-Cool L (KERS)	413775

### Accessories

Description	Stock Ref
Acoustic Purge Fan	477988
Acoustic Purge Fan XL	479829
Wall Mounting Kit for Controller	411628
Econiq S Acoustic Solution Enclosure Kit	414012
Econiq S Acoustic Solution Top Box Kit	414013
Econiq S Acoustic Solution Top Box & Enclosure Kit	414014
Econiq M & L Floor Stand	414122

## Spare Filters

Sentinel Econiq-Cool S	
Description	Stock Ref
ISO 60% Coarse (G4) Filter 2 per Pack	411689
ISO ePM10 50% (M5) Filter 1 per Pack	472669
ISO ePM2.5 70% (F7) Filter 1 per Pack	472671

Sentinel Econiq-Cool L	
Description	Stock Ref
ISO 60% Coarse (G4) Filter 2 per Pack	411690
ISO ePM10 50% (M5) Filter 1 per Pack	411691
ISO ePM2.5 70% (F7) Filter 1 per Pack	411692

## Sensor Overview

Power	Colour	CO <sub>2</sub>	PIR	Temp.	Humidity	Wireless	4 Speed Switch	Stock Ref
Battery	White			✓	✓	✓		496431
Battery	White			✓	✓	✓	✓	496437
Battery	Black			✓	✓	✓	✓	497689
0-10V	White	✓		✓	✓			496432
240V	White			✓	✓	✓		496429
240V	White	✓		✓	✓	✓		496433
240V	White		✓			✓		496438
240V	White			✓	✓	✓	✓	496620
240V	Black			✓	✓	✓	✓	497693
240V	White			✓	✓		✓	496621
240V	Black			✓	✓		✓	497697

## SEC Class

Model	SEC Class
Sentinel Econiq-Cool S	A+
Sentinel Econiq-Cool L	A+

## SAP PCDB Test Results

### Econiq-Cool S

	Thermal Efficiency %	SFP (W/l/s)
K+1	93	0.39
K+2	92	0.46
K+3	91	0.55
K+4	91	0.70
K+5	90	0.85
K+6	89	1.07
K+7	89	1.31

### Econiq-Cool L

	Thermal Efficiency %	SFP (W/l/s)
K+1	93	0.56
K+2	93	0.53
K+3	93	0.56
K+4	92	0.62
K+5	91	0.72
K+6	91	0.84
K+7	90	1.01

## Model Range Overview



Sentinel Econiq-Cool

Sentinel Econiq-Cool L

	Sentinel Econiq-Cool	Sentinel Econiq-Cool L
Recommended max system flow (l/s) @ Pressure (Pa)	97 @ 150	167 @ 150
Acoustic Enclosure	○	X
Acoustic Top Box	○	X
Part F Compliant App Commissioning Certificate	✓	✓
RF858 connectivity, 802.11b/g/n Wi-Fi and Bluetooth low energy 4.2	✓	✓
Spigot Options Vertical - Horizontal	Vertical	Vertical & Horizontal
Spigot size 125mm or 200mm	125	200
Left/Right Hand Orientation Through Control	✓	✓
Fully automatic 100% summer bypass	✓	✓
Active Frost Protection to -20°C	✓	✓
Fault Code Indicator	✓	✓
Easy Access Filters: ISO Coarse 65% (G4)	✓	✓
Easy Access Filters: ISO ePM10 50% (M5)	○	○
Easy Access Filters: ISO ePM2.5 70% (F7)	○	○
Clean Filter Indicator (Time frame)	✓	✓
PIN Number Lock	✓	✓
Running Time Indicator	✓	✓
Enthalpy Heat Exchanger	○	○
Soft-Start Boost	✓	✓
Delay-On	✓	✓
Number of controllable speeds	4	4
Installer function to copy/load unit setup	✓	✓
Inputs 2 x 0-10V; 2 x LS; 5 x Volt-Free	✓	✓
Integral Humidistat	✓	✓
Relay outputs - For example control heaters or geothermal heat exchanger	○	○
BMS - modbus supported over RS485	✓	✓
Operating ambient temperature (°C)	-20 to +40	-20 to +40
Operating Humidity (%RH)	0 to 95	0 to 95
Mounting	Wall or Floor	Wall or Floor
Maintenance access	From Front	From Front

○ - Denote Optional

## Consultant's Specification

### Specification

The Mechanical Ventilation Heat Recovery Unit shall be the Lo-Carbon Sentinel Econiq-Cool as manufactured by Vent-Axia. It should be sized as indicated on the drawings and shall be in accordance with the particular specification.

The unit shall be fully insulated for thermal and acoustic performance and shall incorporate a high-efficiency composite plastic counter-flow heat exchanger with an independently verified thermal efficiency of up to 93% when tested to EN 308.

The heat exchanger shall be protected by ISO 60% Coarse (G4) grade filters on extract and supply with the facility to accommodate ePM2.5 (F7) and ISO ePM10 (M5), or an inline filter such as the Vent-Axia Pure Air Carbon Filter. The built-in filters shall be accessible via tool-free access doors. The heat exchanger, motors, summer bypass and all other serviceable parts shall be accessible through the front of the unit.

The Lo-Carbon Sentinel Econiq-Cool shall automatically vary the ventilation rate via EC/DC motors, as it receives signals from optional or in-built sensor inputs. When a signal is received, the fans shall either vary their speed proportionally or on a normal/boost principle. The unit shall have the facility to commission the supply and extract fans individually via in-built minimum and maximum speed adjustment, alternative wired remote-control unit or via a compatible smartphone using the Vent-Axia Connect application. The fans themselves shall have independent, infinitely variable speed control.

The MVHR unit shall be manufactured with an ABS Outer case construction and an Expanded Polystyrene (EPS) inner chassis with custom motor and impeller mounting features. The inner chassis will assist in reducing noise and act as a large anti-vibration mount avoiding transmission through to the back mounting plate or the base of the unit. The MVHR unit shall be tested to ensure it meets the maximum allowable vibration of no more than 1mm/s, measured on the unit wall fixing points. The unit shall have a fully automatic 100% summer bypass, integral minimum and maximum infinitely variable speed controls with fascia mounted failure indication. The unit shall have low-energy, high efficiency EC/DC fan/motor assemblies with sealed for life bearings. The impellers shall be high-efficiency backward curved centrifugal type, achieving an SFP as low as 0.38W/l/s (EN 308).

The unit shall have two condensate drain outlets for handing to be defined onsite and during commissioning. The unit shall have wireless control capability options, using RF868 connectivity, 802.11b/g/n Wi-Fi and Bluetooth low energy 4.2. The unit shall use RF868 to connect to a wide ecosystem of wireless sensors including but not limited to CO<sub>2</sub> temperature, and relative humidity. The unit shall be able to engage Wi-Fi to connect to local devices and create a local area network to allow for a larger network to be created for commissioning. The unit shall have Bluetooth low energy 4.2 to allow connectivity onto compatible smartphone devices. The unit shall be constructed with a removable tool free front panel which gives access to the removable on-board controller and other accessories. The EPS panel can then be removed with 4 screws allowing full maintenance access. This shall provide access to the following:

- ✓ Supply or extract fan
- ✓ Heat exchanger
- ✓ Access to the electrical connections

Access shall be provided for wiring termination and setup/commissioning. The unit can be supplied with either a backlit user interface or a blank plate, both of which shall be removable for remote mounting if required. Filters shall be accessed via the two filter drawers found near the top of the unit, the S shall have filter drawers and the M and L shall have filter caps.

Units shall be manufactured by Vent-Axia Ltd.

---

### Standard Controls

The Lo-Carbon Sentinel Econiq-Cool shall incorporate the following functions through a user interface fitted by the manufacturer or a paired smartphone with the Vent-Axia Connect application:

- ✓ Integral infinitely variable fan speed control on supply and extract.
- ✓ 6 speeds; 4 adjustable
- ✓ Left or Right hand spigot configuration, programmable during commissioning
- ✓ Tool free filter access
- ✓ Integral BMS interfaces - control and status indication
- ✓ Heating interlocks
- ✓ 24V external sensor supply, eg PIR sensor
- ✓ 0-10V proportional speed adjustment
- ✓ Volt free contacts
- ✓ Fully automatic summer bypass
- ✓ Filter check facility
- ✓ Control panel PIN number lock

The unit shall incorporate:

- ✓ An integral humidity sensor with the following features: Ambient Response; Raises the humidity trigger point as dwelling temperature reduces.
- ✓ Rapid Response: Monitors the rate of change in humidity and triggers increased airflow even if the humidity trigger threshold is not reached.
- ✓ Proportional Response; incrementally increases the fan speed to reduce noise and reduce energy consumption.
- ✓ RS485 connectivity - Long distance cabling to support multiple sensor connections.
- ✓ RF868 connectivity - Radio reference 868 MHZ for multiple wireless sensors pairing Bluetooth low energy 4.2 - Enable pairing within compatible smartphone device
- ✓ 802.11b/g/n Wi-Fi - Enable localised access point or connect to the local area network using the Vent-Axia Connect application, via a compatible smartphone device
- ✓ The unit shall incorporate an automatic 100% summer bypass damper which monitors internal and external temperatures to maintain the user comfort temperature (default 25°C): -
  - 'Evening Fresh' turns the unit to maximum speed with the bypass operational for 2 hours or until the user comfort temperature is reached (default 25°C).
  - 'Night Time Fresh' will run the unit at maximum speed with the bypass operational throughout the night or until the dwelling reaches minimum temperature (default 14°C).

The Lo-Carbon Sentinel Econiq-Cool will send a signal to the Kers Coolboost Heat Pump when a temperature reduction is not possible through the MVHR alone to signal the request for Cooling.

All cooling will be managed by the Kers Coolboost Module.

Independently acoustically tested to BS EN 13141-7:2010.


---



# Sentinel Econiq S

## Dimensions (mm)

Unit

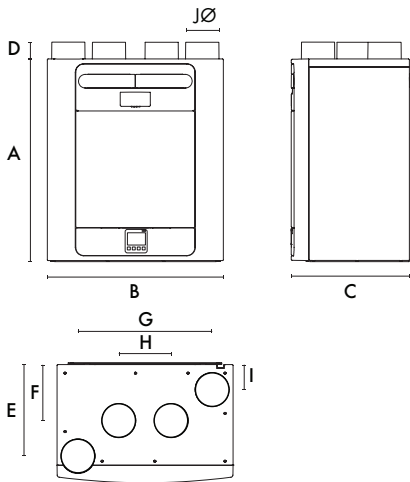

A	B	C	D	E	F	G	H	I	JØ	kg
760	660	443	63	343	210	503	197	93	125	27


Packed weight: 32kg

## Sound Spectrum (Unit only)


Speed	Test mode	Octave Band (Hz) Sound Power Levels, dB								LwA	SPL dB(A) @ 3m
		63	125	250	500	1k	2k	4k	8k		
20%	Supply	52.9	50.9	46.8	43.0	34.6	27.1	19.2	25.4	43.9	26.4
	Extract	50.3	49.0	36.0	31.5	23.6	16.1	18.9	25.3	36.4	18.9
	Breakout	34.6	34.8	35.7	34.9	29.6	25.1	21.0	25.3	36.0	15.5
40%	Supply	59.5	56.5	59.4	55.0	48.2	42.6	31.8	26.1	55.9	38.4
	Extract	51.9	51.3	50.4	41.2	35.0	25.3	19.8	25.4	44.8	27.3
	Breakout	40.2	42.6	46.5	45.4	41.0	36.2	25.5	25.3	46.5	26.0
60%	Supply	66.9	62.4	63.3	62.0	57.9	53.5	43.4	34.2	63.2	45.7
	Extract	60.6	60.3	54.2	49.5	44.4	36.2	27.9	26.3	51.7	34.2
	Breakout	45.5	49.8	52.5	53.1	49.7	46.7	36.2	26.9	54.5	34.0
80%	Supply	82.4	67.6	65.2	67.6	64.2	60.8	50.8	43.2	69.2	51.7
	Extract	75.5	68.6	59.3	56.0	48.3	44.2	36.9	31.3	58.6	41.1
	Breakout	59.2	55.0	56.8	60.0	55.4	53.9	44.1	33.4	61.0	40.5
100%	Supply	79.4	69.6	66.6	75.1	64.9	63.6	53.4	45.7	73.7	56.2
	Extract	72.4	70.5	60.5	56.4	49.8	46.3	39.0	33.4	59.5	42.0
	Breakout	63.0	57.1	58.5	63.7	56.8	55.9	46.4	36.2	63.5	43.0

Tested according to BS EN 13141-7:2010. Breakout quoted spherical. Supply and Extract quoted hemispherical. For in-duct data, end reflections are added based on the spigot size of the unit.

## Performance (Sentinel Econiq S)

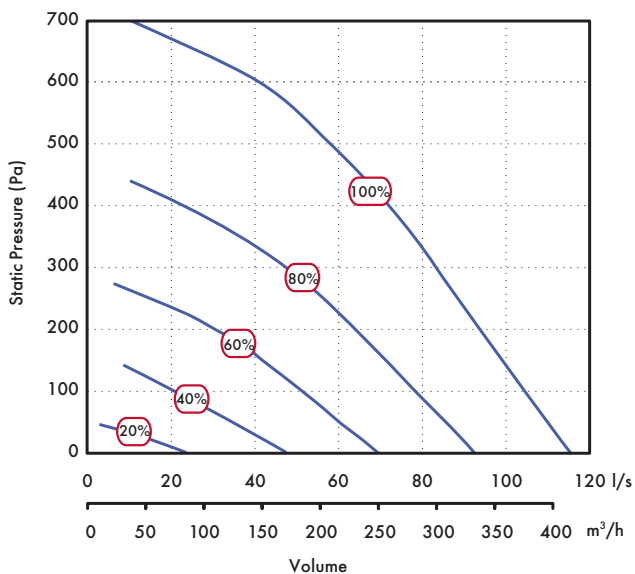

## Acoustic Solution

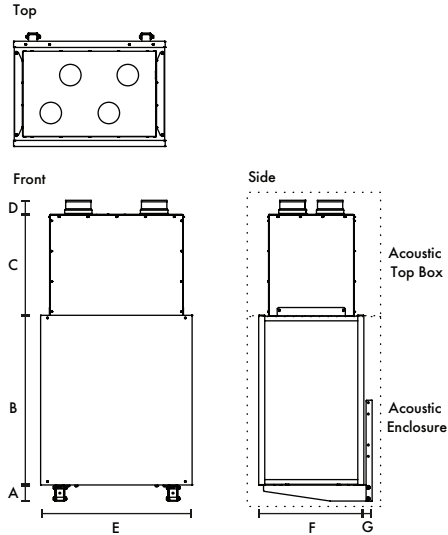


Acoustic Top Box		Acoustic Enclosure		kg	kg	Spigot
A	B	C	D			
80	840	501	68	14	27	125

## Sound Spectrum (Solution Top Box & Enclosure Kit)

Speed	Test mode	Octave Band (Hz) Sound Power Levels, dB								LwA	SPL dB(A) @ 3m
		63	125	250	500	1k	2k	4k	8k		
20%	Supply	54.7	50.5	41.5	30.8	18.6	14.7	18.2	24.0	38.0	20.5
	Extract	54.8	41.7	31.4	20.2	15.2	13.8	18.3	24.3	31.9	14.4
	Breakout	36.6	47.3	38.0	24.7	19.3	16.6	19.1	23.6	34.0	13.5
40%	Supply	61.0	57.7	56.0	39.0	27.5	16.6	18.4	24.1	48.9	31.4
	Extract	55.7	50.8	44.6	26.8	19.1	15.0	18.2	24.0	39.2	21.7
	Breakout	55.9	55.2	48.2	35.5	29.9	20.9	20.4	25.3	42.6	22.1
60%	Supply	64.5	64.3	56.2	48.6	36.0	22.8	19.0	24.2	52.3	34.8
	Extract	59.4	57.3	46.6	36.0	25.6	17.4	18.6	24.5	43.9	26.4
	Breakout	43.5	60.5	49.5	43.5	39.0	32.0	23.8	23.7	47.6	27.1
80%	Supply	68.9	65.9	59.9	53.9	41.4	29.3	21.6	24.7	55.9	38.4
	Extract	63.1	69.3	52.6	43.0	33.4	23.7	20.2	24.6	54.5	37.0
	Breakout	48.3	69.8	52.7	48.3	44.7	39.8	33.2	25.9	57.1	36.6
100%	Supply	72.5	70.5	63.1	56.1	43.9	33.0	23.7	25.2	59.3	41.8
	Extract	70.3	61.9	56.2	45.4	36.6	28.0	22.9	24.6	51.5	34.0
	Breakout	54.3	67.1	63.3	51.3	47.9	43.9	38.5	28.7	57.7	37.2


## Spigot Configuration (Sentinel Econiq S)

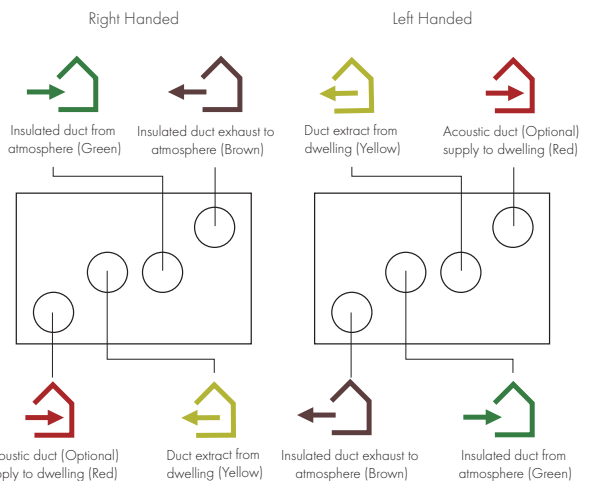

Hand-able through controller (except if pre-heater fitted)

# Sentinel Econiq-Cool L

## Dimensions (mm)

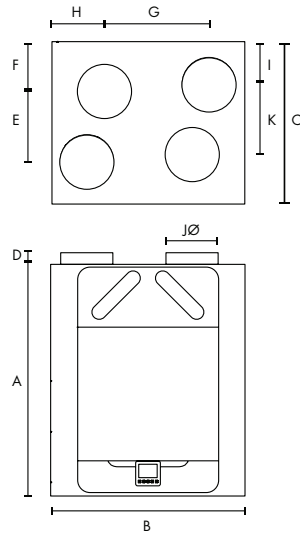


A	B	C	D	E	F	G	H	I	Ø	K	kg
881	728	608	50	261	187	394	200	160	200	261	50

Packed weight: 55kg


## Sound Spectrum

Speed	Test mode	Octave Band (Hz) Sound Power Levels, dB								SPL dB(A) @ 3m
		63	125	250	500	1k	2k	4k	8k	
20%	Breakout	41	41	51	47	40	18	19	23	26
	Inlet	50	43	42	38	31	16	18	23	21
	Outlet	57	56	53	47	40	29	19	24	31
40%	Breakout	41	44	53	52	43	32	20	23	31
	Inlet	60	48	50	38	37	26	19	23	27
	Outlet	68	62	62	56	55	49	33	24	42
60%	Breakout	44	50	55	56	48	42	27	23	34
	Inlet	63	54	59	44	43	37	24	23	35
	Outlet	71	67	67	62	62	59	46	34	49
80%	Breakout	55	54	54	60	52	47	36	24	38
	Inlet	69	60	55	50	48	43	33	24	36
	Outlet	78	72	66	70	67	65	56	44	54
100%	Breakout	67	67	58	72	58	50	42	27	50
	Inlet	81	64	58	57	51	47	39	27	42
	Outlet	91	76	69	74	70	69	62	50	58

## Spigot Configuration

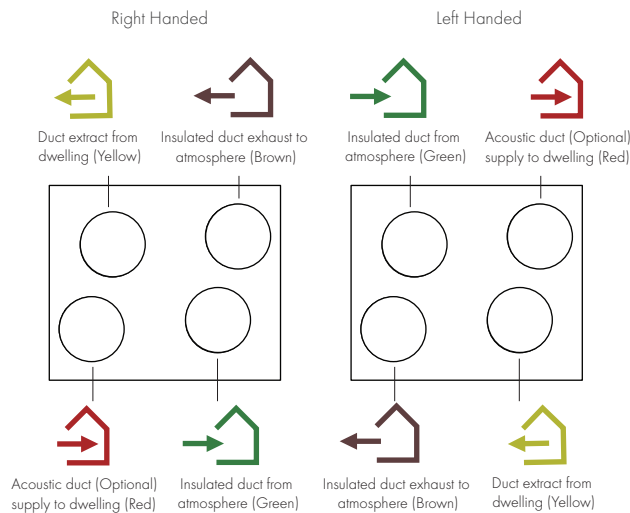

## Performance

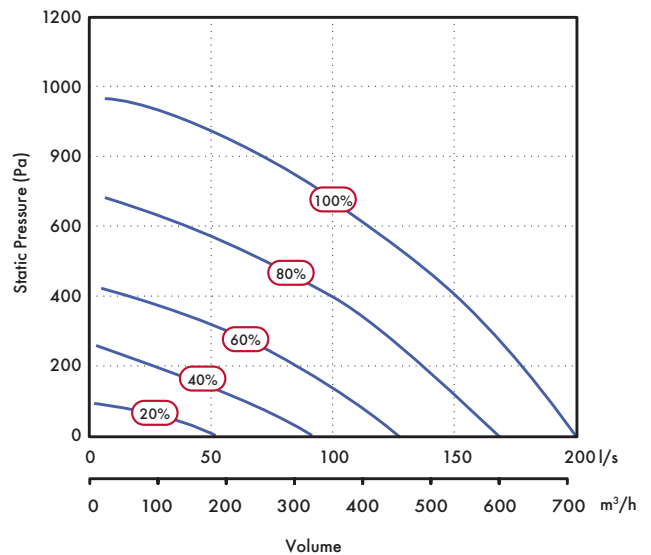

# Sentinel-X Controllers

## Battery Controllers & Sensors



### Battery - Internal Temperature and Humidity - Wireless

Room mounted humidity and temperature sensor for wired or wireless communication with a compatible system. Using an in-built RF 868 MHz (Wireless radio frequency), or RS485 (Wired connection) communication method whilst being powered by batteries.

- Dimensions (HxWxD) (mm) 60 x 60 x 22
- 2 x AAA Batteries included
- Temperature range 0~60°C
- Relative humidity range 0-90% RH
- Wireless range 20m closed/100m open
- RF 868MHz Wireless or RS485 Wired communication
- Status LED indicator for pairing, health check and fault conditions
- Mounted using provided back plate

Stock Ref

496431



### Battery - 4 Speed Switch with Temperature and Humidity - Wireless

Room mounted Speed Switch for wireless communication with a compatible system. Using an in-built RF 868 MHz (Wireless radio frequency) communication whilst being powered by batteries.

- Dimensions (HxWxD) (mm) 90 x 90 x 17
- 2 x AAA Batteries included
- Temperature range 0~60°C
- Relative humidity range 0-90% RH
- Wireless range 20m closed/100m open
- RF 868MHz Wireless
- Mounted using provided back plate or compatible with a standard single gang or surface mounted pattress box
- Status LED indicator for pairing, health check and fault conditions

Model

Stock Ref

White

496437

Black

497689

## HMI Kit



### Wall-mounted HMI Kit to suit Econiq models with full HMI

Includes HMI Blank controller, HMI backplate and cable.

- Dimensions (HxWxD) (mm) 90 x 90 x 17
- Power supply 240V
- Wireless range 20m closed/100m open
- RF 868MHz Wireless or RS485 Wired communication
- Compatible with standard single gang or surface mounted pattress box

Stock Ref

411628

## 24V Sensor



### 0-10V CO<sub>2</sub>, Temperature and Humidity - Wired

Room mounted CO<sub>2</sub> sensor with 0-10V signal output powered by an external 24V supply.

- Dimensions (HxWxD) (mm) 90 x 90 x 17
- 24V Power supply required
- Temperature range 0~60°C
- Relative humidity range 0-90% RH
- CO<sub>2</sub> range 0-2000PPM
- Compatible with standard single gang or surface mounted pattress box
- Status LED indicator for pairing, health check, faults & air quality traffic light index
- 0-10V Wired Communication

Stock Ref

496432

# Sentinel-X Controllers

## 240V Controllers & Sensors



### 240V - Internal Temperature and Humidity - Wireless

Room mounted humidity and temperature sensor for wired or wireless communication with a compatible system. Using an in-built RF 868 MHz (Wireless radio frequency), or RS485 (Wired connection) communication method whilst being powered by a local 240V supply.

- Dimensions (HxWxD) (mm) 90 x 90 x 17
- Power supply 240V
- Temperature range 0~60°C
- Relative humidity range 0-90% RH
- Wireless range 20m closed/100m open
- RF 868MHz Wireless or RS485 Wired communication
- Compatible with standard single gang or surface mounted pattress box
- Status LED indicator for pairing, health check, faults & air quality traffic light index

Stock Ref  
**496429**



### 240V - CO<sub>2</sub>, Temperature and Humidity - Wireless

Room mounted CO<sub>2</sub> sensor for wired or wireless communication with a compatible system. Using an in-built RF 868 MHz (Wireless radio frequency), or RS485 (Wired connection) communication method whilst being powered by a local 240V supply.

- Dimensions (HxWxD) (mm) 90 x 90 x 17
- Power supply 240V
- Temperature range 0~60°C
- Relative humidity range 0-90% RH
- CO<sub>2</sub> Range 0-2000 PPM
- Wireless range 20m closed/100m open
- RF 868MHz Wireless or RS485 Wired communication
- Compatible with standard single gang or surface mounted pattress box
- Status LED indicator for pairing, health check, faults & air quality traffic light index

Stock Ref  
**496433**



### 240V - 4 Speed Switch with Temperature and Humidity - Wired

Room mounted Speed Switch for wired communication with a compatible system. Using an in-built RS485 communication method powered by a local 240V supply.

- Dimensions (HxWxD) (mm) 90 x 90 x 17
- Power Supply 240V
- Temperature range 0~60°C
- Relative humidity range 0-90% RH
- Mounted using provided back plate or compatible with standard single gang or surface mounted pattress box
- Status LED indicator for pairing, health check and fault conditions
- RS485 Wired Connection

Model  
White  
Black

Stock Ref  
**496621**  
**497697**



### 240V - 4 Speed Switch with Temperature and Humidity - Wireless

Room mounted Speed Switch for wireless communication with a compatible system. Using an in-built RF 868 MHz (Wireless radio frequency) communication whilst being powered by a local 240V supply.

- Dimensions (HxWxD) (mm) 90 x 90 x 17
- Power Supply 240V
- Temperature range 0~60°C
- Relative humidity range 0-90% RH
- Wireless range 20m closed/100m open
- RF 868MHz Wireless
- Mounted using provided back plate or compatible with standard single gang or surface mounted pattress box
- Status LED indicator for pairing, health check and fault conditions

Model  
White  
Black

Stock Ref  
**496620**  
**497693**



### 240V - PIR Sensor - Wireless

Room mounted PIR sensor for wired or wireless communication with a compatible system. Using an in-built RF 868 MHz (Wireless radio frequency), or RS485 (Wired connection) communication method whilst being powered by a local 240V supply. Room mounted presence detector for min/max or on/off control. Wall or ceiling mounting.

- Dimensions (HxWxD) (mm) 90 x 90 x 17
- Power supply 240V
- 5-25min run on timer
- PIR Range 3m
- Compatible with standard single gang or surface mounted pattress box
- Wireless range 20m closed/100m open
- RF 868MHz Wireless or RS485 Wired communication

Stock Ref  
**496438**



# Lo-Carbon PIV Systems



For controlling condensation, the Vent-Axia Lo-Carbon PoziDry and PoziDry Pro offer a quick and simple solution. A loft mounted positive input fan, the PoziDry Pro, draws fresh air from atmosphere, filters it and pushes it into the dwelling via a ceiling mounted diffuser. Stale air in the property is forced out through the natural forms of ventilation, such as window mounted trickle vents.

For those properties that do not have a loft, Lo-Carbon PoziDry Compact provides an easy to install solution. A duct mounted unit that can be fitted in a number of locations around a single floor flat or apartment.

**Vent-Axia**<sup>®</sup>





Lo-Carbon PoziDry Pro™  
Positive Input Ventilation

130 - 131

---



Lo-Carbon PoziDry Compact  
Positive Input Ventilation

132 - 133

---

# Lo-Carbon PoziDry Pro™

- Anti-vibration joist mounting legs as standard
- Fully adjustable between 19l/s - 49l/s
- Smart Sense™ Technology offers simple control and data logging
- Uses latest Lo-Carbon motor technology for low running costs
- Ultra low sound level
- Complete with ceiling diffuser, flexible duct and G4 filters with F7 upgrade option
- IPX2 rated



Some parts of this product are made using recycled material therefore the colour of the plastic may vary from white to black. To find out more please visit [www.vent-axia.com/sustainable](http://www.vent-axia.com/sustainable)

## Positive Input Ventilation

Designed to prevent and treat condensation and mould quickly. The PoziDry Pro™ is the perfect solution for general refurbishment, as its discreet, easy to install and almost silent running.

Lo-Carbon PoziDry Pro™ offers a quick and simple solution. A loft mounted positive input fan draws fresh air from the loft, filters it and gently feeds it into the dwelling via a ceiling mounted diffuser. Clean, fresh filtered air with a lower moisture content dilutes, displaces and replaces, contaminated and moisture laden air.

## Installation

The Lo-Carbon PoziDry Pro™ is uniquely flexible in its installation methods, high sided anti-vibration legs and a hanging kit both come as standard, allowing the PoziDry Pro™ to be installed quickly in any sized loft. The easy carry handle incorporated into the body makes carrying the unit easy and safe; especially useful when lifting the unit through loft hatches.

The unit is supplied with a purpose designed diffuser to be located over the stairwell of a conventional dwelling, in the main hall of a bungalow, in the landing or hallway. The 4-point contact easy fit technology allows fast and repeatable 'drill free' installation.

Using Smart Sense™ Technology the unit is easily set to the appropriate speed at installation based on the size of the dwelling. Natural leakage points that are present in all dwellings, as well as purpose provided exhaust points enhances the air change. En-suites and utility areas should be serviced by continuous mechanical extract ventilation.

The PoziDry Pro™ can also be set to 'Radon' mode in properties that are affected by high radon gas levels. The unit will run continuously to ensure the constant supply of good indoor air to protect residents from harmful gases.

## Performance

With a lightweight construction, the Lo-Carbon PoziDry Pro™ features a specially developed Lo-Carbon DC fan/motor arrangement which runs quietly and delivers incredibly low running costs. The Lo-Carbon PoziDry Pro™ uses a sensor to monitor the temperature in the loft, automatically adjusting the air volume when necessary. Additionally, resident comfort can be assured through an option to change the temperature at which the unit increases or decreases airflow. The unit will continuously ventilate silently in the background whilst in 'Trickle' mode. Once the unit automatically senses excess heat being lost into the loft the airflow will increase to 'Energy Recovery' mode to recover heat that would otherwise be lost through the roof. During summer months should the loft exceed 27°C (adjustable) the unit will enter 'Stand-by' mode in order stop the circulation of warm air allowing for a more comfortable living environment. PoziDry Pro™ Heater models automatically turn on the 500W heater to help take the chill off the incoming air.

## Filter

Standard filters supplied with the PoziDry Pro™ are G4 (PM10 filtration) which filter out many every day pollutants such as pollen and dust. Optional F7 filters are available (PM2.5 filtration) removing tobacco smoke, diesel particulates, spores and a number of bacteria.

## Data Logger

Smart Sense™ Technology allows the unit to record how long it has been running in each of its speeds. It also measures the number of days the product has been switched on to provide precise running information. Smart Sense™ Technology can also record the duration of heater activity and energy used.

## Speed Control

Smart Sense™ Technology makes speed selection easy. Once house size is selected based on number of bedrooms, PoziDry Pro™ automatically selects the correct 'Trickle' and 'Energy Recovery' speeds. Should you need to adjust speed manually this can be done easily. The Smart Sense™ interface can also be locked ensuring that settings are not tampered with.



## Heater

The heater model comes with a 500W heater attached to the unit. Smart Sense™ controls allow the PoziDry Pro™ to be adjusted fully when the heater is activated making it adaptable for all lifestyles.

## Air Replacement Grille Set\*

This set is for air replacement through doors. Consists of a two-piece telescopic set, which fits unobtrusively on either side of the door panel. Minimum fixing thickness 30mm. Plastic. Dimensions: 454 x 90mm.

\*Only required if there is not a 10mm undercut on the internal doors.

## Mounting Options

PoziDry Pro™ comes as standard with both high sided anti-vibration legs and a hanging kit. The legs are designed to mount between standard joist widths between 300-650mm. Clip and fit connections allow for easy installation.

## Motor

The electronically controlled DC motor is manufactured with long life ball bearings and is fitted with Overload Protection. Suitable for ambient operating temperatures of -25°C to +40°C. For complete peace of mind, the Vent-Axia Lo-Carbon PoziDry Pro™ is backed by a 5 year warranty.

## Discreet Diffuser


The discreet circular diffuser\*\* is easily installed, fitted and maintained. Easy fix features it can be installed against uneven ceiling surfaces with no gaps. Its low profile and aesthetically pleasing design has been developed with tenant acceptability in mind. The Smart Air™ Technology reduces air supply noise while increasing performance by 10%. The easy clip blanking plates help to control airflow into the property.

\*\*Diffuser will always be supplied using white plastic.

## Dimensions (mm)

A*	B	C	D	ØE	F	G	ØH	I**
300-650	425	365	330	200	530-570	300	220	400-600

\*Variable to adapt to differing joist widths. \*\* Variable to allow for adapting product height

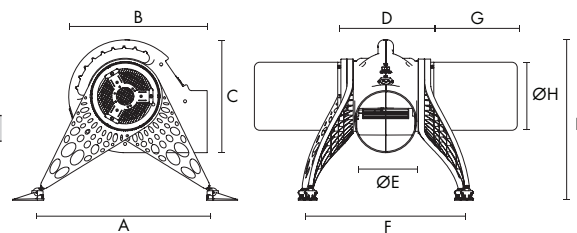

## Performance Guide

Bedroom	Trickle		Energy Recovery	
	Flow Rate (l/s)	Power (W)	Flow Rate (l/s)	Power (W)
1	19	3.1	29	5.1
2	25	4.3	37	7.6
3	31	6.0	46	12.0
4	37	8.0	49	13.1
Adjustable	19-48	-	20-49	-

## Models

All models come with G4 filter, 2m of flexi duct and Ø200mm Diffuser. The Pozi Dry Pro™ FD model diffuser is fire rated but does not include Smart Air™ Technology.

### PoziDry Pro™

Stock Ref

476310

### PoziDry Pro™ with Heater

Stock Ref

476311

### PoziDry Pro FD with Heater (Multi-storey Compliant)

Stock Ref

476312

## Accessories

### Model

#### Twin Spigot Kit

An additional kit to allow an extra circular diffuser to be installed near the PoziDry unit. The kit includes 1 x Ø200mm 6m Duct, 2 x Worm Clips, 1 x Ø200mm Equal Y Piece and 1 x Diffuser.

Stock Ref

449071

#### Interconnecting cable for boost switch

411150

#### Diffuser

478228

#### F7 Filter Set

477957

#### G4 Filter Set

477629

#### Air replacement grille set - Brown

561400

#### Air replacement grille set - Ivory

561401

# Lo-Carbon PoziDry Compact Pro

- Ultra small unit can fit in the smallest of spaces
- Removable inner cartridge for easy repairs and maintenance
- Flow rates adjustable in 1l/s increments, up to 30l/s
- Extremely low energy consumption
- Washable, high capacity G4 or F7 filter
- Advanced data logger and 3 digit settings lock for peace of mind
- 7 year warranty
- Ideal solution for flats with mould in a habitable room
- Integrated 300W heater to temper the fresh incoming air



## Positive Input Ventilation

For those properties that do not have a loft, the Lo-Carbon PoziDry Compact Pro provides an easy to install solution. The unit has been designed to be as small as possible with multiple inlet and outlet positions allowing it to be installed in the best place every time.

Air is drawn into the Lo-Carbon PoziDry Compact Pro unit via an external inlet and through a short length of duct. The specially developed power pack cartridge assembly draws the air through an integral, high capacity, washable filter. The precision engineered scroll/impeller assembly and anti-vibration EPP body guarantees ultra low sound levels and increased energy efficiency.

The fresh, filtered airflow passes along the ducting and enters the room through a discreet grille. The rotatable integrated grille can be turned to one of 8 positions ensuring that the airflow is always directed upwards, reducing cold draughts.

The system provides fresh, tempered air into the home and creates an indoor environment where the damaging effects of condensation find it hard to exist, benefiting both the occupants and the structure of the building.

## Performance

If the ambient temperature exceeds 27°C, the Lo-Carbon PoziDry Compact Pro will automatically switch off to prevent over-heating. This temperature threshold can be adjusted at installation.

The unit also includes a 300W heater, which tempers the fresh incoming air to the property, ensuring resident thermal comfort.

## Peace of Mind

Smart Sense™ technology records usage, energy consumption and filter life to ensure the unit has been used as intended. This is secured by an installer enabled 3 digit settings lock to make the PoziDry Compact Pro tamper free.


## Model

With integral heater  
Stock Ref  
**479188**

## Accessories

Model	Stock Ref
ABS Spare Cover	479843
Spare Boxing Cover	479849
Spare Boxing Cover with Grille right	479850
Spare Boxing Cover with Grille left	479851
Boxing 200mm x 200mm x 2m	479852
Boxing End Stop	479853
Boxing End Stop with Grille	479854
Boxing Inner Bend	479855
Boxing Outer Bend	479856
Silencer Kit	479857
Acoustic Flexi Duct	443273
Spare Scroll Cartridge	479859
Spare PM10 Filter	479860
Spare PM2.5 filter	479861

## Dimensions (mm)

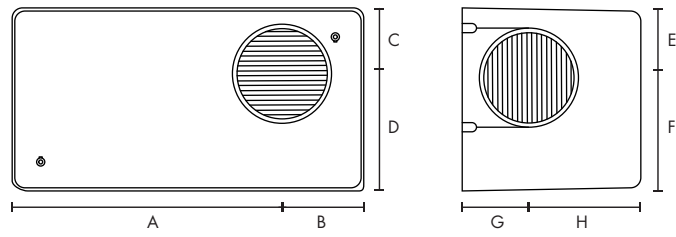

A	B	C	D	E	F	G	H	Spigot Ø	Unit Weight
302	91	74	132	79	127	75	125	100	3kg

## Performance Guide

No. Bedrooms	Not Ducted (l/s)	Power (W)*	Ducted (l/s)	Power (W)
1	19	9	19	11
2	25	18	25	18
LS/Boost	25	18	25	18

# Ducting, Attenuators, Filters and Fittings



Since 1936, Vent-Axia has been known for providing a complete ventilation solution. This has not changed, and now we offer one of the widest ranges of ancillaries available today.

**Vent-Axia**<sup>®</sup>

**Vent-Axia**<sup>®</sup>  
**Lo-Carbon**<sup>™</sup>  
**Approved  
Installer**





Thermflow 200mm Ducting

136 - 137



Uniflexplus+ Semi-Rigid Duct System

138 - 139




Vent-Axia Pure Air  
NOX Filtration System, PM10 & PM2.5

140 - 141



Whole House Attenuators

142 - 143



Ducting & Accessories

144 - 149




Pyrocheck Fire Airbrick

150 - 151



Fan Fire Collars

152 - 153



Vent Duct Fire Sleeves

154 - 158



Fire Rated Air Valves

159



Circular Supply & Exhaust Diffusers

160




Uniflexplus+ RV Adjustable Valve

161 - 162



Low Resistance Inlet/Outlet Air Brick

163




Universal Roof Vents

164

# Thermflow 200mm Ducting

- Rigid lightweight 200mm ducting solution
- Outer case is shockproof and produced as CFC Free polyethylene (PE)
- Pre-Insulated polyolefin foam
- High thermal value achieving 0.038 W/(m·K)
- Quick and simple, airtight installation

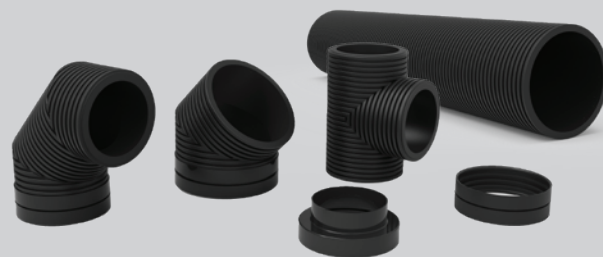

## Thermflow 200mm Ducting

Innovative and sustainable insulated ventilation piping system developed to offer high-grade solutions to the increasing demands of comfort climate in residential buildings.

The Thermflow Rigid Range sets the standard for easy to install, pre-insulated ductwork. Quick and simple installation with minimum tools, tubes and bends are easily cut in a right-angle by following the channel of ridges.

Connections utilise rubber connectors ensuring a simple, air-tight, quick and secure installation.

Connections are flexible, absorb movement in the ducting system and therefore result in a tension free installation without resonance.

High thermal insulation value achieving 0.038 W/(m·K) with a closed cell structure and vapour tight barrier, preventing condensation forming. Insulated polyolefin foam is mechanically strong and water repellent, resulting in less dust pollution inside the ducting, it is also easy to clean. Manufactured sustainably without waste of raw materials, recycling directly for future batches with Cradle2Cradle certification.



## Technical

### Insulation Layer

Material	Polyolefin foam insulation
Structure	Closed cell structure, CFC free
Inner Diameter	200mm
Thermal Conductivity	0.038 W/m·K
Water Resistant Properties	Water repellent, vapour diffusion tight, no risk of corrosion, moss or mould forming
Chemical Constancy	Excellent
Indentation Resistance	Excellent


### Complete System

Fire Classification	SBI Euroclass E according to EN13501
Service Temperature Range	-40°C to +95°C
Noise compression through exterior case conforms to DIN-EN-ISO-5135-1999	TQ-Air 200/170mm 14 dB(A)
Recyclability	100%
Cradle to Cradle certification	Silver*

### Protection Casing

Material	Polyethylene
Structure	Corrugated, solid ring, dimensionally stable, mechanically strong and shockproof
Outer diameter	250mm
Scent	Neutral
Colour	Black

## Models



200mm Round 2m Length

Duct Size  
Ø200mm

Stock Ref  
**413054**

### Performance

	Pa	l/s
TQ-Air Flexalen HRV D250/200 Tube L2000	0.10	27.8
	0.20	55.6
	0.30	83.3
	0.80	111.1
	1.30	138.9
	1.80	166.7



200mm Round 90 Deg Bend

Duct Size  
Ø200mm

Stock Ref  
**413055**

### Performance

	Pa	l/s
TQ-Air Flexalen HRV D250/200 Bend 90°	0.20	27.8
	0.50	55.6
	1.00	83.3
	1.90	111.1
	3.10	138.9
	4.50	166.7



200mm Round 45 Deg Bend

Duct Size  
Ø200mm

Stock Ref  
**413056**

### Performance

	Pa	l/s
TQ-Air Flexalen HRV D250/200 Bend 45°	0.20	27.8
	0.50	55.6
	0.80	83.3
	1.40	111.1
	2.30	138.9
	3.40	166.7



200mm Round T-Piece

Duct Size  
Ø200mm T-Piece

Stock Ref  
**413059**

### Performance

	Pa	l/s
TQ-Air Flexalen HRV D250/200 T-Piece	2.50	27.8
	3.00	55.6
	5.00	83.3
	8.00	111.1
	12.50	138.9
	19.80	166.7



200mm Round Connector

Duct Size  
Ø200mm

Stock Ref  
**413057**



250mm - 200mm Round Reducer


Duct Size  
Ø200-250mm

Stock Ref  
**413058**



# Uniflexplus+ Semi-Rigid Duct System

- Compact, low profile system
- Highly flexible and robust
- Extremely crush resistant
- Quick and easy to install
- PCDB listed
- Suitable for installation in concrete
- Corrosion resistant
- Smooth inner surface with antistatic and antibacterial coating
- Independently tested and accredited for air tightness
- Class D air tightness
- Operating temp.: -20°C to +60°C
- A spigot blanking cap is provided for use with single runs of semi-rigid

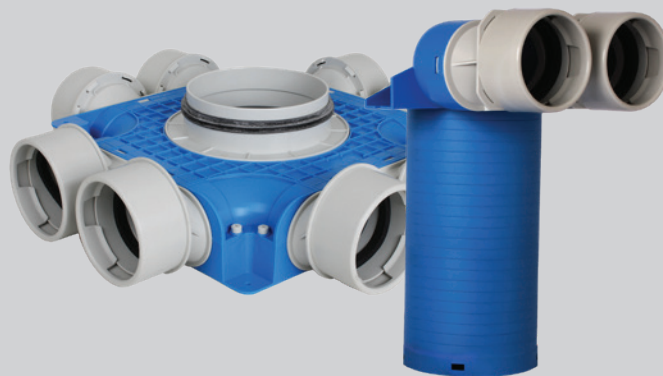

## Uniflexplus+ Semi-Rigid Range

The new Uniflexplus+ Semi-Rigid Range sets the standard for easy to install, low profile ducting solutions. The system gives all of the flexibility that semi-rigid ducting provides - without taking up vital space. With minimal components, the system is uncomplicated to ensure a hassle-free, speedy install.

The Uniflexplus+ Semi-Rigid Range is compatible with most wholehouse ventilation systems including the Lo-Carbon Sentinel Kinetic Range (MVHR).

### Accessories

Description	Duct Size	Stock Ref
Circular Extract Diffusers	125mmØ	10544125
Duct Knife	Ø90mm	472252
90° Bend	Ø90mm	472253
Coupler	Ø90mm	472254

Description	Model	Duct Size	Stock Ref
Adjustable Round Valve	RV125	125mmØ	479372
Adjustable Round Valve Large	RVG125	125mmØ	479373
Adjustable Square Valve	RVV125	125mmØ	479374
Adjustable Valve Collar	RVK	125mmØ	479376
Adjustable Valve Blanking Plate*	RVB	125mmØ	479377



\*Not suitable for RVV125 model

## Complete System Setup Examples


The distribution boxes can be mounted vertically on a wall or fixed horizontally onto a ceiling slab to achieve a solution tailored to your need. At a depth of just 90mm, the distribution boxes offer a considerably low-profile solution - they can then be combined with various components to suit on-site needs.

Semi-Rigid ducting is run from distribution boxes and ancillaries to respective rooms in the dwelling. Connecting the Semi-Rigid ducting to components is exceptionally straightforward to allow speedy installation - simply turn the ducting into the spigot until it clicks twice to achieve an airtight mechanical seal.

Rigid or flexible 125mm diameter ducting is then run from the MVHR unit to the distribution box.

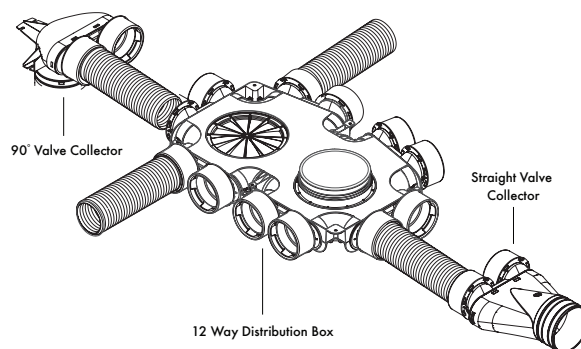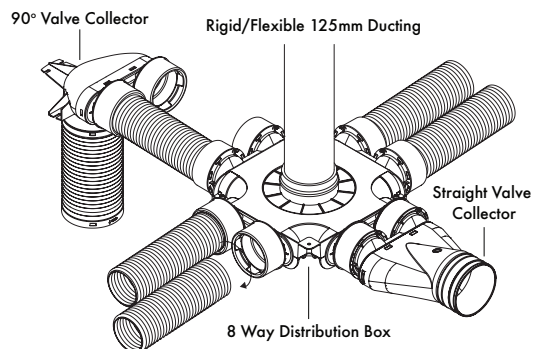

## Models



### 90° Valve Collector



The 90° Valve Collector connects a section of 125mm diameter ducting and turns 90° into 1 or 2 spigots to connect to the semi rigid - ideal for dropping semi-rigid into ceiling diffusers.

Duct Size                      Stock Ref  
 2xØ90 - Ø125mm            **472248**  
 1xØ90 - Ø125mm            **472249**

**Dimensions (mm)**

Stock Ref	Curve Ref	A	B	kg
472248				0.9
472249	1	376	300	0.8

**Performance**

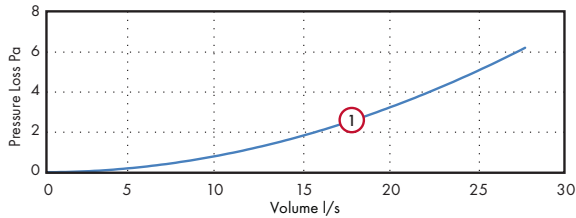

**Distribution Box**



The low-profile distribution box runs a central spigot of diameter 125mm into a set of either 8 or 12 sub-spigots, depending on requirements. Available with 90mm semi-rigid spigots.

Model                              Stock Ref  
 12xØ90 - Ø125mm            **472250**  
 8xØ90 - Ø125mm             **472251**

**Dimensions (mm)**

Stock Ref	Curve Ref	A	B	C	kg
472250	1	124	755	520	3.9
472251	2	125	479	479	2.3

**Performance**

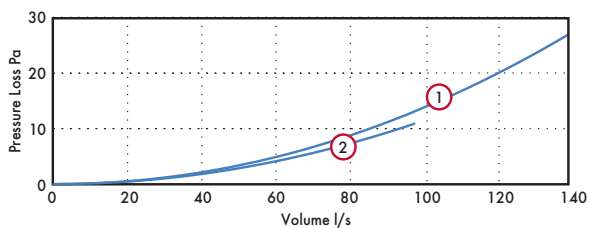

**Straight Valve Collector**

The straight valve collector takes 125mm or 100mm ducting and connects it to semi-rigid ducting.

Model                              Stock Ref  
 2xØ90mm - Ø125mm        **472262**  
 1xØ90mm - Ø100mm        **416139**

**Dimensions (mm)**

Stock Ref	A	B	C
472262/416139	123	311	229



**Semi-Rigid Ducting**



Suitable for installation in concrete ceilings, suspended ceilings, internal walls, risers or frames, the Semi-Rigid Ducting is double-walled providing optimum flexibility. With an antistatic and antibacterial coating, the internal surface of the Semi-Rigid Ducting is smooth to ensure minimal resistance to airflow. Normally flammable construction material class E, according to EN-13501-1.

Pipe Size                              Stock Ref  
 90mmØ x 50m                    **406588**  
 90mmØ x 25m                    **474078**

**Dimensions (mm)**

Stock Ref	Curve Ref	O/I Ømm	Length m	Coil Ømm	Coil Height mm	kg
406588	1	90/76	50	1130	250	19.5
474078	-	90/76	25	1130	125	9.8

**Performance**

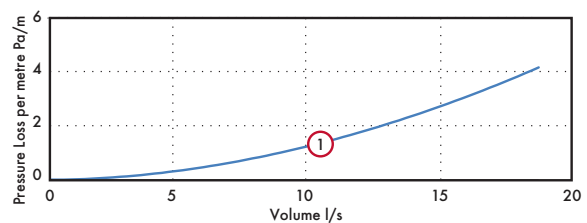


**Distribution Box**

Model                                      Stock Ref  
 8xØ90 - 160mm Side Connection    **415881**  
 9xØ90 - 160mm With Silencer        **415882**  
 9xØ90 - 180mm With Silencer        **415883**  
 4xØ90 - 125mm With Silencer        **415884**

**Dimensions (mm)**

Stock Ref	Curve Ref	A	B	C
415882/ 415883	2	283	432	755
415884	1	245	432	437

**Performance**

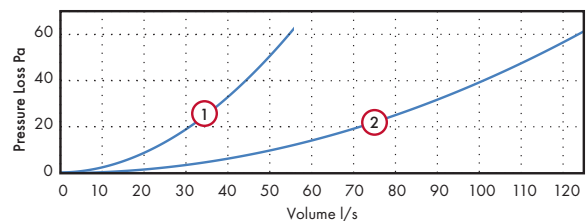

# Vent-Axia Pure Air

- Removes NOX and other gases
- Removes particles down to PM2.5
- Offers multiple spigot options
- Low pressure drop
- Easy to install with mounting brackets
- Conforms to international air quality guideline limits
- Easy installation & maintenance
- Various sizes to suit residential or commercial applications
- Provides induct noise attenuation
- Insulating jackets available
- New compact unit available



## What is it?

The Vent-Axia Pure Air combines particulate and gas filters to remove pollutants prior to entering residences and commercial buildings through mechanical ventilation and heat recovery systems. The Vent-Axia Pure Air is designed to bring outdoor air pollutant levels within the guideline exposure limits as set out in the World Health Organisation Air Quality Guidelines and the CAFE Directive prior to entering an occupied space.

Indoor air quality (IAQ) is becoming increasingly important with properties being built in urban, industrialised areas. The Vent-Axia Pure Air offers a complete filtration solution with a range of specifiable products that meet planning obligations and refine traditional filtration, leaving home owners with confidence in their heat recovery systems.

## What does it do?

The Vent-Axia Pure Air sets the benchmark for high level filtration. It targets pollutants generated outside of the home, by traffic and industrial processes, and reduces these before supplying the air into the dwelling.

The Vent-Axia Pure Air filter is fitted to the intake airflow and incorporates two types of filtration:

- Enhanced activated Carbon which removes unpleasant odours and harmful gasses such as Nitrous Oxide (NO<sub>2</sub>).
- ISO 65% Coarse (G4) or ePM2.5 (F7) particulate filters which can remove tiny airborne contaminants such as pollen, bacteria and even PM2.5 diesel particulates.

The combination of MVHR and Vent-Axia Pure Air filtration offers the ideal indoor environment.

## Unit Specification

The Vent-Axia Pure Air is manufactured from 1.2mm Galvanised Steel together with suitable sealing for particulate and gas filters. Access is available on both sides via bolted lift off panels. Various round and rectangular transformation spigots are available to suit ductwork systems for both domestic and commercial duct work.

## Filter Specification

### Particulates, PM10, PM2.5

A new ISO filtration standard has come into force. The test method has changed so direct comparisons between EN779 2012 and ISO 16890 cannot be drawn. Below is a guide to the filter efficiencies:


ISO 16890	EN779
45% Coarse	G3
65% Coarse	G4
ePM10 50%	M5
ePM2.5 70%	F7

### Pollutant Gases, NO<sub>2</sub>, SO<sub>2</sub>, O<sub>3</sub>, VOC


The gas stage filters in the Vent-Axia Pure Air are designed to achieve a minimum contact time suitable for the removal of pollutant gases at the rated airflow. A specially formulated activated carbon and chemical mix acts upon pollutant concentrations common in dirty city air, reducing them below guidelines set by current legislation.

## Unit Configuration

Standard Gas Filter Unit

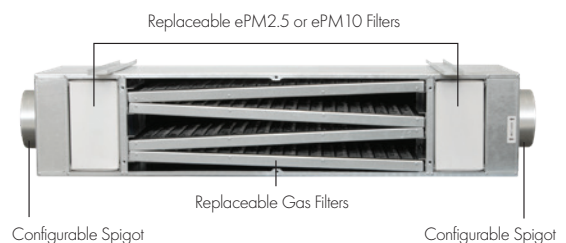

Compact Gas Filter Unit

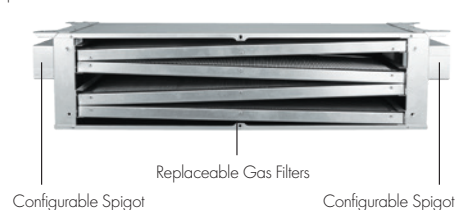

## Accessories

### Model

Single spare ePM2.5 filter  
 Single spare ePM10 filter  
 Single spare gas filter


Stock Ref  
**PAFIL-25**  
**PAFIL-10**  
**PAFIL-NO2**

## Models


Model Range	Stock Ref	Airflow l/s	Intake Spigot (mm)*	Exhaust Spigot (mm)*	Filter Types	Clean Filter Pressure Drop (Pa)	Approximate Unit Weight (kg)
Standard Gas Filter Unit	PA50-125125-25	50	125Ø	125Ø	PM2.5 x 2-off & NO <sub>2</sub> x 4-off	100	25
	PA50-125204-25	50	125Ø	204x60	PM2.5 x 2-off & NO <sub>2</sub> x 4-off	100	25
	PA50-204204-25	50	204x60	204x60	PM2.5 x 2-off & NO <sub>2</sub> x 4-off	100	25
	PA50-125125-10	50	125Ø	125Ø	PM10 x 2-off & NO <sub>2</sub> x 4-off	45	25
	PA50-125204-10	50	125Ø	204x60	PM10 x 2-off & NO <sub>2</sub> x 4-off	45	25
	PA50-204204-10	50	204x60	204x60	PM10 x 2-off & NO <sub>2</sub> x 4-off	45	25
	PA100-150150-25	100	150Ø	150Ø	PM2.5 x 4-off & NO <sub>2</sub> x 8-off	100	49
	PA100-150220-25	100	150Ø	220x90	PM2.5 x 4-off & NO <sub>2</sub> x 8-off	100	49
	PA100-220220-25	100	220x90	220x90	PM2.5 x 4-off & NO <sub>2</sub> x 8-off	100	49
	PA100-150150-10	100	150Ø	150Ø	PM10 x 4-off & NO <sub>2</sub> x 8-off	45	49
	PA100-150220-10	100	150Ø	220x90	PM10 x 4-off & NO <sub>2</sub> x 8-off	45	49
	PA100-220220-10	100	220x90	220x90	PM10 x 4-off & NO <sub>2</sub> x 8-off	45	49
	PA200-200200-10	200	200Ø	200Ø	PM10 x 8-off & NO <sub>2</sub> x 16-off	45	96
PA200-250250-10	200	250Ø	250Ø	PM10 x 8-off & NO <sub>2</sub> x 16-off	45	96	
PA300-315315-10	300	315Ø	315Ø	PM10 x 12-off & NO <sub>2</sub> x 24-off	45	144	
Compact Gas Filter Unit	PAC50-125	50	125Ø	125Ø	NO <sub>2</sub> x 4-off	45	23
	PAC50-150	50	150Ø	150Ø	NO <sub>2</sub> x 4-off	45	23
	PAC50-204	50	204x60	204x60	NO <sub>2</sub> x 4-off	45	23
	PAC50-220	50	220x90	220x90	NO <sub>2</sub> x 4-off	45	23
	PAC100-125	100	125Ø	125Ø	NO <sub>2</sub> x 8-off	45	45
	PAC100-150	100	150Ø	150Ø	NO <sub>2</sub> x 8-off	45	45
	PAC100-204	100	204x60	204x60	NO <sub>2</sub> x 8-off	45	45
	PAC100-220	100	220x90	220x90	NO <sub>2</sub> x 8-off	45	45

\*Airflow may be reversed through the unit to offer alternative spigot options.

Example Stock Ref:



## Dimensions (mm)

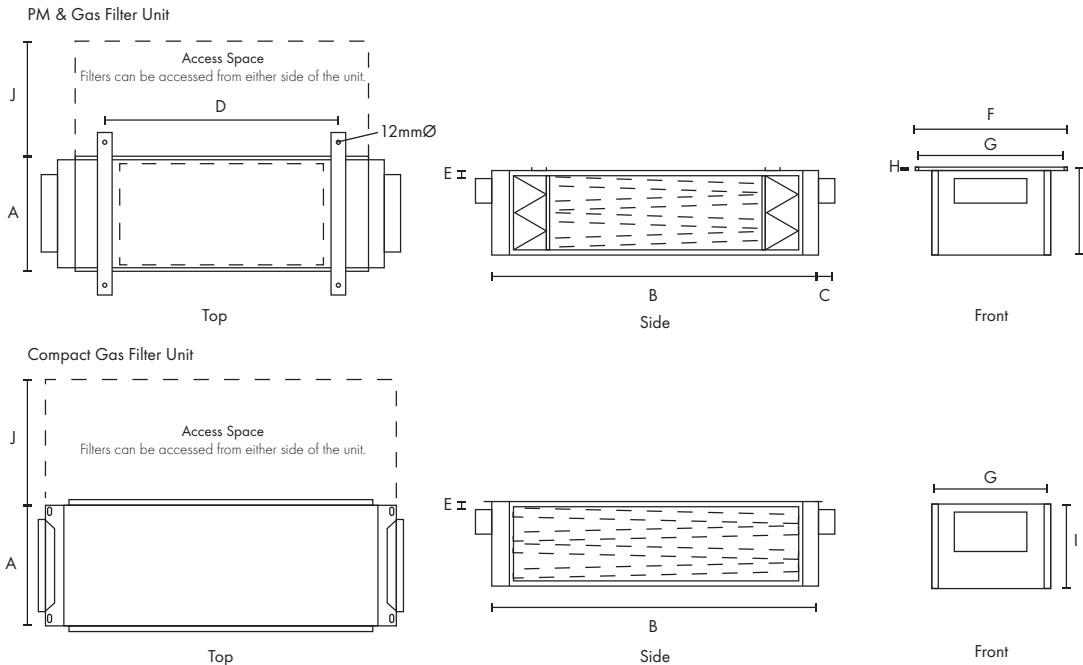

Model Range	Airflow l/s	A	B	C	D	E	F	G	H	I	J
Standard Gas Filter Unit	50	320	980	50	700	25	435	405	10	220	325
	100	620	980	50	700	25	730	700	10	220	325
	200	620	980	50	700	110/85	730	700	10	420	650
	300	620	980	50	700	160	730	700	10	630	960
Compact Gas Filter Unit	50	320	690	-	-	25	-	260	-	180	325
	100	620	690	-	-	25	-	560	-	180	325

# Wholehouse Attenuators

- Reduces induct noise
- Variety of sizes to suit specified noise requirements
- Compatible with both 204x60mm and 220x90mm rectangular ductwork
- Central and offset spigot options to suit each installation
- Rigid galvanized steel construction
- Easy installation
- Suitable for almost any ventilation system
- Low pressure loss



The Vent-Axia Wholehouse Attenuator has been developed to reduce induct noise in both residential and commercial ducting systems.

## Technical Details

The Wholehouse Attenuator is compatible with either 204x60mm<sup>2</sup> or 220x90mm<sup>2</sup> ducting. It also offers two spigot options to suit the installation and design requirements. The Wholehouse Attenuator is available with either a standard centralised spigot or, for instances when the ducting is installed flat to a concrete slab, an offset spigot. As well as saving the need for additional ducting components, this allows for a much easier and quicker installation.

## Noise Reduction

Offering excellent sound reduction over a range of frequencies, the Wholehouse Attenuator is available in two lengths depending on the noise suppression requirements. For MVHR systems the attenuator can be fitted on the supply side to habitable rooms, reducing airborne in-duct noise. For MVHR and extract-only systems, the attenuator may be placed on the extract side to limit 'crosstalk' through ductwork between rooms.

## Models

### Attenuator with Central Spigot

Model	Stock Ref
204x60 Duct 650mm Length	477369
204x60 Duct 950mm Length	407915A
204x60 Duct 1250mm Length	407916A
220x90 Duct 650mm Length	477370
220x90 Duct 950mm Length	407920A
220x90 Duct 1250mm Length	407921A


### Attenuator with Offset Spigot

Model	Stock Ref
204x60 Duct 650mm Length	477371
204x60 Duct 950mm Length	475427
204x60 Duct 1220 Length	475428
220x90 Duct 650mm Length	477372
220x90 Duct 950mm Length	475429
220x90 Duct 1250mm Length	475430


### Acoustic Flexible Ducting

Model	Stock Ref
125mmØ Duct 1m Length	443793
150mmØ Duct 1m Length	443274

## Dimensions (mm)

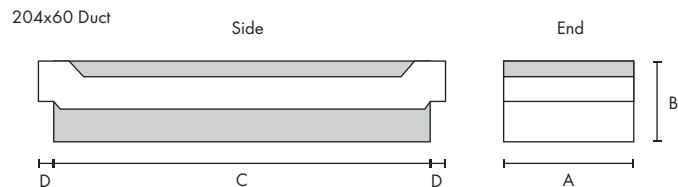

Model	A	B	C	D	kg
204x60 Duct 650mm Length	210	125	600	25	10
204x60 Duct 950mm Length	210	125	900	25	13
204x60 Duct 1250mm Length	210	125	1200	25	17

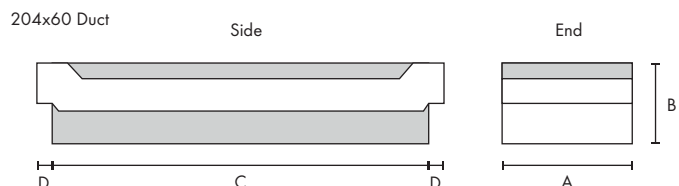

Model	A	B	C	D	kg
220x90 Duct 650mm Length	226	148	600	25	10
220x90 Duct 950mm Length	226	148	900	25	14
220x90 Duct 1250mm Length	226	148	1200	25	17

## Acoustic Performance

Model	Octave Band (Hz) Static Insertion Loss, dB							
	63	125	250	500	1k	2k	4k	8k
204x60 Duct 650mm Length	0	3	8	12	25	40	48	32
204x60 Duct 950mm Length	0.3	3.2	11.6	24.2	38	49.1	50.3	36.4
204x60 Duct 1250mm Length	0.3	1.8	14.1	21.3	35.4	46.9	50.4	36.4
220x90 Duct 650mm Length	0	3	8	14	28	40	48	33
220x90 Duct 950mm Length	7.3	10.2	13.1	26.2	34.9	47.6	52.2	38.9
220x90 Duct 1250mm Length	1.2	7.4	18.6	30.2	39.1	51	45.2	38.6
125mmØ Duct 1m Length	5.5	11.5	17	19.9	19.1	25.6	20	21.6
150mmØ Flexible Duct 1m Length	-1.2	10.6	19	16.8	15.7	22.2	15.7	17.6

## Pressure Loss

Model	Duct Size (mm)	Volume (l/s)	Pressure Loss (Pa)
Attenuator*	204x60	15	1
		30	4
		60	15
		80	27
Attenuator*	220x90	15	1
		30	4
		60	14
		80	31
Acoustic Flexible Ducting (1 m)	125	15	2.8
		30	8.8
		60	19.2
		80	37.5
Acoustic Flexible Ducting (1 m)	150	15	1.7
		30	6.4
		60	13.8
		80	28.4

\*Data based on 1250mm lengths

# Ducting & Accessories

## Flat Channel Ducting Insulated/Uninsulated



Stock Ref	Duct Size	External Dimensions (mm)			Resistance (Pa) at flow rate								
		A	B	C	8 l/s	13 l/s	21 l/s	29 l/s	37 l/s	45 l/s	53 l/s	61 l/s	
<b>433944</b>	Uninsulated 110 x 54 x 2m	54	110	2000	-	-	-	-	-	-	-	-	-
<b>436599</b>	Uninsulated 110 x 54 x 1.5m	54	110	1500	1.2	2.4	5.3	9.1	13.9	19.8	25.9	32	
<b>496156</b>	Uninsulated 204 x 60 x 1m	60	204	1000	<1	<1	<1	1.5	2.2	3.0	3.9	5.1	
<b>436617</b>	Uninsulated 204 x 60 x 1.5m	60	204	1500	<1	<1	1.3	2.2	3.3	4.5	5.9	7.8	
<b>406870<sup>(a)</sup></b>	Insulated 204 x 60 x 1.5m	110	254	1500	<1	<1	1.3	2.2	3.3	4.5	5.9	7.8	
<b>496160<sup>(a)</sup></b>	Insulated Sleeve 204 x 60 x 2m	110	254	2000	-	-	-	-	-	-	-	-	
<b>496161<sup>(a)</sup></b>	Insulated 204 x 60 x 2m	110	254	2000	-	-	-	-	-	-	-	-	
<b>474677</b>	Uninsulated 204 x 60 x 2m	60	204	2000	<1	<1	1.7	2.9	4.3	5.9	7.7	10.4	
Stock Ref	Duct Size	A	B	C	60 l/s			120 l/s			180 l/s		
<b>496157</b>	Uninsulated 220 x 90 x 1m	90	220	1000	0.9			3.2			6.7		
<b>407343<sup>(a)</sup></b>	Insulated 220 x 90 x 1.5m	140	270	1500	1.4			4.9			10.2		
<b>403025</b>	Uninsulated 220 x 90 x 1.5m	90	220	1500	1.4			4.9			10.2		
<b>474678</b>	Uninsulated 220 x 90 x 2m	90	220	2000	1.9			2.6			13.6		


### Storage of Ducting Products

All straight duct lengths are supplied either wrapped or within boxes, surrounded with white protective packaging to help mitigate damaging effects of sunlight exposure. Do not remove the white reflective packaging and leave in sunlight. UV exposure breaks down the polymer chains, resulting in a weaker molecular bond within the PVC, leading to reduced tensile strength and flexibility.

On receipt of goods, we recommend all PVC ducting products are immediately stored in a cool, shaded place to avoid damage due to heat build-up within the packaging. Any extrusions (lengths of product) should be stored horizontally and supported along the whole length of the product. In summer months, heat can build up inside packaging faster and there is a chance that PVC goods could become warped if stored incorrectly.


Vent-Axia will not be liable for any damage caused to ducting or PVC products through incorrect storage.

## Flat Channel Connector. F to F



Stock Ref	Duct Size	External Dimensions (mm)			Resistance (Pa) at flow rate								
		A	B	C	8 l/s	13 l/s	21 l/s	29 l/s	37 l/s	45 l/s	53 l/s	61 l/s	
<b>436623<sup>(b)</sup></b>	204 x 60	64	212	100	<1	<1	<1	<1	<1	<1	1.2	1.5	
<b>436605</b>	110 x 54	54	114	100	<1	<1	1.1	1.4	2.2	3.4	4.8	6.4	
Stock Ref	Duct Size	A	B	C	60 l/s			120 l/s			180 l/s		
<b>403026</b>	220 x 90	95	224	52	<1			<1			<1		

## Channel Fixing Clip (Pack of 10)



Stock Ref	Duct Size	External Dimensions (mm)			Resistance (Pa) at flow rate								
		A	B	C	60 l/s	120 l/s	180 l/s						
<b>403030</b>	220 x 90	97	44	19	N/A	N/A	N/A						

## Horizontal 90° Bend. F to F




Stock Ref	Duct Size	External Dimensions (mm)			Resistance (Pa) at flow rate								
		A	B	C	8 l/s	13 l/s	21 l/s	29 l/s	37 l/s	45 l/s	53 l/s	61 l/s	
<b>406879<sup>(a)</sup></b>	Insulated 204 x 60	110	285	285	0.7	1.7	4.1	8.4	13	18	25	34	
<b>436620<sup>(b)</sup></b>	Uninsulated 204 x 60	60	260	260	0.7	1.7	4.1	8.4	13	18	25	34	
<b>436602</b>	Uninsulated 110 x 54	60	152	152	2.3	9.9	21	38	64	93	124	162	
Stock Ref	Duct Size	A	B	C	60 l/s			120 l/s			180 l/s		
<b>407342<sup>(a)</sup></b>	Insulated 220 x 90	145	275	275	9			36			80		
<b>403028<sup>(b)</sup></b>	Uninsulated 220 x 90	95	250	250	9			36			80		

<sup>(a)</sup> Minimum insulation wall thickness 25mm. Insulation Thermal Conductivity: 0.04 W/(m.K)

<sup>(b)</sup> This part comes in Grey. Whilst we will look to maintain the colour of Grey, by the nature of adopting a recycled plastic the colour and shade may vary at any given time.




## Horizontal 45° Bend. F to F




Stock Ref	Duct Size	External Dimensions (mm)			Resistance (Pa) at flow rate								
		A	B	C	8 l/s	13 l/s	21 l/s	29 l/s	37 l/s	45 l/s	53 l/s	61 l/s	
<b>437280</b>	Uninsulated 110 x 54	-	-	-	-	-	-	-	-	-	-	-	-
<b>406876</b> <sup>(a)</sup>	Insulated 204 x 60	115	290	285	0.2	0.7	1.2	2.1	3.8	6.1	9.2	13	
<b>249944A</b> <sup>(b)</sup>	Uninsulated 204 x 60	65	240	260	0.2	0.7	1.2	2.1	3.8	6.1	9.2	13	
Stock Ref	Duct Size	A	B	C	60 l/s			120 l/s			180 l/s		
<b>449363</b> <sup>(b)</sup>	Uninsulated 220 x 90	95	240	200	5			20			46		
<b>414589</b>	Insulated 220 x 90	145	290	250	5			20			46		

## Horizontal T. F to F to F




Stock Ref	Duct Size	External Dimensions (mm)			Resistance (Pa) at flow rate								
		A	B	C	8 l/s	13 l/s	21 l/s	29 l/s	37 l/s	45 l/s	53 l/s	61 l/s	
<b>406883</b> <sup>(a)</sup>	Insulated 204 x 60	115	310	280				Vary on installation					
<b>436551</b> <sup>(b)</sup>	Uninsulated 204 x 60	65	310	255				Vary on installation					
<b>436614</b>	Uninsulated 110 x 54	60	185	150				Vary on installation					
Stock Ref	Duct Size	A	B	C	60 l/s			120 l/s			180 l/s		
<b>449365</b> <sup>(b)</sup>	Uninsulated 220 x 90	95	275	250				Vary on installation					

## Vertical 90° Bend. F to F




Stock Ref	Duct Size	External Dimensions (mm)			Resistance (Pa) at flow rate								
		A	B	C	8 l/s	13 l/s	21 l/s	29 l/s	37 l/s	45 l/s	53 l/s	61 l/s	
<b>406872</b> <sup>(a)</sup>	Insulated 204 x 60	140	260	140	1.1	2.5	5.2	9.8	16.1	24	33.6	45	
<b>436621</b> <sup>(b)</sup>	Uninsulated 204 x 60	115	210	115	1.1	2.5	5.2	9.8	16.1	24	33.6	45	
<b>436603</b>	Uninsulated 110 x 54	95	115	95	3.3	15.5	36	61	96	138	190	253	
Stock Ref	Duct Size	A	B	C	60 l/s			120 l/s			180 l/s		
<b>403029</b> <sup>(b)</sup>	Uninsulated 220 x 90	115	225	120	7			28			66		
<b>414591</b>	Insulated 220 x 90	140	275	145	7			28			66		

## Vertical 45° Bend. F to F



Stock Ref	Duct Size	External Dimensions (mm)			Resistance (Pa) at flow rate								
		A	B	C	8 l/s	13 l/s	21 l/s	29 l/s	37 l/s	45 l/s	53 l/s	61 l/s	
<b>406871</b> <sup>(a)</sup>	Insulated 204 x 60	125	260	140	0.1	0.5	1.3	2.5	4.4	6.9	10	13.3	
<b>445196</b> <sup>(b)</sup>	Uninsulated 204 x 60	100	210	115	0.1	0.5	1.3	2.5	4.4	6.9	10	13.3	
<b>441655</b>	Uninsulated 110 x 54	115	115	70	1	2.4	6.6	12.9	23.1	35.1	48	64	
Stock Ref	Duct Size	A	B	C	60 l/s			120 l/s			180 l/s		
<b>449364</b> <sup>(b)</sup>	Uninsulated 220 x 90	110	225	115	6			27			65		
<b>414590</b>	Insulated 220 x 90	135	275	140	6			27			65		

## Elbow Bend. 100mm to Rectangular. M to F




Stock Ref	Duct Size	External Dimensions (mm)			Resistance (Pa) at flow rate								
		A	B	C	8 l/s	13 l/s	21 l/s	29 l/s	37 l/s	45 l/s	53 l/s	61 l/s	
<b>436624</b> <sup>(b)</sup>	204 x 60	80	215	195	2.9	7.1	15.1	28	45.1	68.1	92.2	118	
<b>436607</b>	110 x 54	90	115	140	3	8	17.7	33	49.9	74.5	101	137	
Stock Ref	Duct Size	A	B	C	60 l/s			120 l/s			180 l/s		
<b>403027</b> <sup>(b)</sup>	220 x 90	118	226	240	N/A			N/A			N/A		

<sup>(a)</sup> Minimum insulation wall thickness 25mm. Insulation Thermal Conductivity: 0.04 W/(m.K)

<sup>(b)</sup> This part comes in Grev. Whilst we will look to maintain the colour of Grev, by the nature of adopting a recycled plastic the colour and shade may vary at any given time.


# Ducting & Accessories

## Elbow Bend. 125mm to Rectangular. M to F




Stock Ref	Duct Size	External Dimensions (mm)			Resistance (Pa) at flow rate							
		A	B	C	8 l/s	13 l/s	21 l/s	29 l/s	37 l/s	45 l/s	53 l/s	61 l/s
<b>436625</b> <sup>(b)</sup>	Uninsulated 204 x 60	80	215	195	3.1	5.9	12.2	25	43.6	62.2	86	111
<b>449361</b> <sup>(b)</sup>	Uninsulated 220 x 90	120	225	240	60 l/s			120 l/s			180 l/s	
<b>414592</b> <sup>(a)</sup>	Insulated 220 x 90	145	275	265	N/A			N/A			N/A	

## Elbow Bend. 150mm to Rectangular. M to F




Stock Ref	Duct Size	External Dimensions (mm)			Resistance (Pa) at flow rate							
		A	B	C	8 l/s	13 l/s	21 l/s	29 l/s	37 l/s	45 l/s	53 l/s	61 l/s
<b>436626</b> <sup>(b)</sup>	Uninsulated 204 x 60	80	215	195	2.8	4.9	11.6	21	31	41	53	67
<b>449362</b> <sup>(b)</sup>	Uninsulated 220 x 90	120	225	240	60 l/s			120 l/s			180 l/s	
<b>414593</b> <sup>(a)</sup>	Insulated 220 x 90	145	275	265	N/A			N/A			N/A	

## Elbow Bend. 100mm to Rectangular. F to F



Stock Ref	Duct Size	External Dimensions (mm)			Resistance (Pa) at flow rate							
		A	B	C	8 l/s	13 l/s	21 l/s	29 l/s	37 l/s	45 l/s	53 l/s	61 l/s
<b>436608</b> <sup>(b)</sup>	110 x 54	90	115	140	2.1	5.5	14.3	27.2	44.3	69	93	118

## Flat Channel connector with Damper




Stock Ref	Duct Size	External Dimensions (mm)			Resistance (Pa) at flow rate							
		A	B	C	8 l/s	13 l/s	21 l/s	29 l/s	37 l/s	45 l/s	53 l/s	61 l/s
<b>400735</b>	110 x 54	60	115	75	16	17.5	19.5	22	25.5	30.5	36	42

## Drop down section F to F



Stock Ref	Duct Size	External Dimensions (mm)			Resistance (Pa) at flow rate							
		A	B	C	8 l/s	13 l/s	21 l/s	29 l/s	37 l/s	45 l/s	53 l/s	61 l/s
<b>442273</b>	204 x 60	120	220	210	0.2	0.5	1.7	3.6	6.0	9.1	12.4	16.6

## Single Air Brick Horizontal (System 60 Air Grille Adaptor is supplied with the Single Air Bricks)



Stock Ref	Duct Size	External Dimensions (mm)			Resistance (Pa) at flow rate							
		A	B	C	8 l/s	13 l/s	21 l/s	29 l/s	37 l/s	45 l/s	53 l/s	61 l/s
<b>436612</b>	110 x 54 (Terracotta)	65	210	85	3.2	7.8	20.9	39	65	96	128	176
<b>436611</b>	110 x 54 (Brown)	65	210	85	3.2	7.8	20.9	39	65	96	128	176

<sup>(a)</sup> Minimum insulation wall thickness 25mm. Insulation Thermal Conductivity: 0.04 W/(m.K)


<sup>(b)</sup> This part comes in Grey. Whilst we will look to maintain the colour of Grey, by the nature of adopting a recycled plastic the colour and shade may vary at any given time.

## Single Air Grille Soldier



Stock Ref	Duct Size	External Dimensions (mm)			Resistance (Pa) at flow rate							
		A	B	C	8 l/s	13 l/s	21 l/s	29 l/s	37 l/s	45 l/s	53 l/s	61 l/s
<b>438594</b>	204 x 60 (White)	210	65	15	3.3	10	20.6	40	63	92.8	128	168
<b>468728A</b>	204 x 60 (Terracotta)	210	65	15	3.3	10	20.6	40	63	92.8	128	168
<b>468730A</b>	204 x 60 (Brown)	210	65	15	3.3	10	20.6	40	63	92.8	128	168
<b>468729A</b>	204 x 60 (Beige)	210	65	15	3.3	10	20.6	40	63	92.8	128	168


## Double Air Brick



Stock Ref	Duct Size*	Colour	External Dimensions (mm)			Resistance (Pa) at flow rate							
			A	B	C	8 l/s	13 l/s	21 l/s	29 l/s	37 l/s	45 l/s	53 l/s	61 l/s
<b>438604</b>	204 x 60	White	145	245	80	0.2	1.6	4.3	8.7	13.9	21.1	27.5	37.4
<b>438607</b>	204 x 60	Terracotta	145	245	80	0.2	1.6	4.3	8.7	13.9	21.1	27.5	37.4
<b>438605</b>	or 220 x 90	Brown	145	245	80	0.2	1.6	4.3	8.7	13.9	21.1	27.5	37.4
<b>438606</b>		Beige	145	245	80	0.2	1.6	4.3	8.7	13.9	21.1	27.5	37.4


\*In conjunction with Double Air Brick Adaptor below

## Double Air Brick Adaptor Rectangular Duct




Stock Ref	Duct Size	External Dimensions (mm)			Resistance (Pa) at flow rate								
		A	B	C	8 l/s	13 l/s	21 l/s	29 l/s	37 l/s	45 l/s	53 l/s	61 l/s	
<b>438608</b>	204 x 60	135	226	85	-	-	-	-	-	-	-	-	-
<b>449367<sup>(b)</sup></b>	220 x 90	135	226	85	-	-	-	-	-	-	-	-	-

## Double Air Brick Adaptor Round Duct



Stock Ref	Duct Size	External Dimensions (mm)			Resistance (Pa) at flow rate								
		A	B	C	8 l/s	13 l/s	21 l/s	29 l/s	37 l/s	45 l/s	53 l/s	61 l/s	
<b>449360</b>	220 x 90 to 100/125/150	-	-	-	-	-	-	-	-	-	-	-	-

## Air Grille Adaptor



Stock Ref	Duct Size	External Dimensions (mm)			Resistance (Pa) at flow rate							
		A	B	C	8 l/s	13 l/s	21 l/s	29 l/s	37 l/s	45 l/s	53 l/s	61 l/s
<b>436609</b>	110 x 54	65	210	85	0.2	1.2	2.5	4.7	7.8	11	14	18


## Flexible Ducting



Stock Ref	Duct Size	External Dimensions (mm)			Resistance (Pa) at flow rate							
		A	B	C	8 l/s	13 l/s	21 l/s	29 l/s	37 l/s	45 l/s	53 l/s	61 l/s
<b>5109662</b>	204 x 60	-	-	-	0.2	0.6	1.5	2.6	4.1	6.0	8.2	11.5
<b>449366</b>	220 x 90	-	-	-	60 l/s		120 l/s		180 l/s			
					N/A		N/A		N/A			


# Ducting & Accessories

## Round (M) 100mm to Rectangular (F/M) Adaptor




Stock Ref	Duct Size	External Dimensions (mm)			Resistance (Pa) at flow rate							
		A	B	C	8 l/s	13 l/s	21 l/s	29 l/s	37 l/s	45 l/s	53 l/s	61 l/s
<b>441654</b> <sup>(b)</sup>	M to F 204 x 60	140	210	215	1.0	1.96	3.2	4.9	6.7	8.7	11.2	14.5
<b>400740</b>	M to M 110 x 54	100	115	180	1.2	4.2	8.3	19.8	29.9	42	60	86

## Round (F) 125mm to Rectangular (F) Adaptor



Stock Ref	Duct Size	External Dimensions (mm)			Resistance (Pa) at flow rate							
		A	B	C	8 l/s	13 l/s	21 l/s	29 l/s	37 l/s	45 l/s	53 l/s	61 l/s
<b>370127</b> <sup>(b)</sup>	204 x 60	140	210	213	<1	<1	1.5	2.8	4.5	6.7	9	11.5

## Round (F) 150mm to Rectangular (F) Adaptor




Stock Ref	Duct Size	External Dimensions (mm)			Resistance (Pa) at flow rate							
		A	B	C	60 l/s	120 l/s				180 l/s		
<b>403031</b> <sup>(b)</sup>	Uninsulated 220 x 90	160	225	205	N/A	N/A				N/A		
<b>414594</b>	Insulated 220 x 90	210	275	205	N/A	N/A				N/A		

## Short Round (M) 100mm to 110 x 54 (F) Adaptor



Stock Ref	Duct Size	External Dimensions (mm)			Resistance (Pa) at flow rate							
		A	B	C	8 l/s	13 l/s	21 l/s	29 l/s	37 l/s	45 l/s	53 l/s	61 l/s
<b>455035</b>	110 x 54	60	110	105	1.2	4.3	8.4	20	30.2	43	62	88

## Round Ducting Insulated/Uninsulated<sup>(b)</sup>



Stock Ref	Duct Size	External Dimensions (mm)			Resistance (Pa) at flow rate							
		A	B	C	8 l/s	13 l/s	21 l/s	29 l/s	37 l/s	45 l/s	53 l/s	61 l/s
<b>497488</b>	Uninsulated 100 Ø x 1m	100	100	1000	<0.5	<0.5	0.85	1.4	1.8	2.25	2.65	3.1
<b>406873</b> <sup>(a)</sup>	Insulated 100 Ø x 2m	150	150	2000	<1	<1	1.7	2.8	3.6	4.5	5.3	6.2
<b>5108250</b>	Uninsulated 100 Ø x 2m	100	100	2000	<1	<1	1.7	2.8	3.6	4.5	5.3	6.2
<b>496155</b>	Uninsulated 120 Ø x 1m	120	120	1000	<0.5	<0.5	<0.5	0.65	0.9	1.2	1.55	1.9
<b>434715</b>	Uninsulated 125 Ø x 1.5m	125	125	1500	<1	<1	<1	1.3	1.8	2.4	3.1	3.8
<b>406874</b> <sup>(a)</sup>	Insulated 125 Ø x 2m	175	175	2000	<1	<1	<1	1.3	1.8	2.4	3.1	3.8
<b>496158</b>	Uninsulated 150 Ø x 1m	150	150	1000	<0.5	<0.5	<0.5	<0.5	0.6	0.8	1	1.25
<b>496159</b>	Uninsulated 150 Ø x 1.5m	150	150	1500	-	-	-	-	-	-	-	-
<b>406875</b> <sup>(a)</sup>	Insulated 150 Ø x 2m	200	200	2000	<1	<1	<1	<1	1.2	1.6	2	2.5
<b>5108248</b>	Uninsulated 150 Ø x 2m	150	150	2000	<1	<1	<1	<1	1.2	1.6	2	2.5
<b>415501</b>	Uninsulated 200 Ø x 0.5m	200	200	500	-	-	-	-	-	-	-	-

### Storage of Ducting Products

All straight duct lengths are supplied either wrapped or within boxes, surrounded with white protective packaging to help mitigate damaging effects of sunlight exposure. Do not remove the white reflective packaging and leave in sunlight. UV exposure breaks down the polymer chains, resulting in a weaker molecular bond within the PVC, leading to reduced tensile strength and flexibility.


On receipt of goods, we recommend all PVC ducting products are immediately stored in a cool, shaded place to avoid damage due to heat build-up within the packaging. Any extrusions (lengths of product) should be stored horizontally and supported along the whole length of the product. In summer months, heat can build up inside packaging faster and there is a chance that PVC goods could become warped if stored incorrectly.

Vent-Axia will not be liable for any damage caused to ducting or PVC products through incorrect storage.

<sup>(a)</sup>Minimum insulation wall thickness 25mm. Insulation Thermal Conductivity: 0.04 W/(m.K)

<sup>(b)</sup>This part comes in Grey. Whilst we will look to maintain the colour of Grey, by the nature of adopting a recycled plastic the colour and shade may vary at any given time.

## Equal Tee Insulated/Uninsulated MMM



Stock Ref	Duct Size	External Dimensions (mm)			Resistance (Pa) at flow rate							
		A	B	C	8 l/s	13 l/s	21 l/s	29 l/s	37 l/s	45 l/s	53 l/s	61 l/s
<b>406884</b> <sup>(a)</sup>	Insulated 100 Ø	190	160	160	Vary on installation							
<b>372007</b>	Uninsulated 100 Ø	190	110	135	Vary on installation							
<b>406885</b> <sup>(a)</sup>	Insulated 125 Ø	210	165	185	Vary on installation							
<b>428636</b>	Uninsulated 125 Ø	210	115	160	Vary on installation							
<b>406886</b> <sup>(a)</sup>	Insulated 150 Ø	235	180	200	Vary on installation							
<b>370237</b>	Uninsulated 150 Ø	235	130	175	Vary on installation							

## 90° Bend Insulated/Uninsulated MM



Stock Ref	Duct Size	External Dimensions (mm)			Resistance (Pa) at flow rate							
		A	B	C	8 l/s	13 l/s	21 l/s	29 l/s	37 l/s	45 l/s	53 l/s	61 l/s
<b>406880</b> <sup>(a)</sup>	Insulated 100 Ø	155	150	125	2.8	5.5	11	20.3	33	45	60	79
<b>372004</b>	Uninsulated 100 Ø	130	100	100	2.8	5.5	11	20.3	33	45	60	79
<b>406881</b> <sup>(a)</sup>	Insulated 125 Ø	185	180	155	<1	1.8	5	8.2	11.8	18	26	35
<b>427360</b>	Uninsulated 125 Ø	160	130	130	<1	1.8	5	8.2	11.8	18	26	35
<b>406882</b> <sup>(a)</sup>	Insulated 150 Ø	215	205	180	<1	1.0	2.5	4.1	6.4	9.6	13.5	18
<b>370295</b>	Uninsulated 150 Ø	190	155	155	<1	1.0	2.5	4.1	6.4	9.6	13.5	18

## 45° Bend Insulated/Uninsulated MM




Stock Ref	Duct Size	External Dimensions (mm)			Resistance (Pa) at flow rate							
		A	B	C	8 l/s	13 l/s	21 l/s	29 l/s	37 l/s	45 l/s	53 l/s	61 l/s
<b>406877</b> <sup>(a)</sup>	Insulated 100 Ø	205	150	155	<1	1.9	8.1	11.7	17.5	24.6	31.4	-
<b>372005</b>	Uninsulated 100 Ø	180	100	130	<1	1.9	8.1	11.7	17.5	24.6	31.4	-
<b>406878</b> <sup>(a)</sup>	Insulated 125 Ø	225	180	175	<1	<1	1.8	2.9	4.6	6.6	9	12.2
<b>441657</b>	Uninsulated 125 Ø	200	130	150	<1	<1	1.8	2.9	4.6	6.6	9	12.2

## Connector MM




Stock Ref	Duct Size	External Dimensions (mm)			Resistance (Pa) at flow rate							
		A	B	C	8 l/s	13 l/s	21 l/s	29 l/s	37 l/s	45 l/s	53 l/s	61 l/s
<b>372006</b>	100 Ø	100	60	-	-	-	-	-	-	-	-	-
<b>428633</b>	125 Ø	125	60	-	-	-	-	-	-	-	-	-
<b>370299</b>	150 Ø	150	60	-	-	-	-	-	-	-	-	-
<b>415500</b>	200 Ø	200	60	-	-	-	-	-	-	-	-	-

## Reducer



Stock Ref	Duct Size	External Dimensions (mm)			Resistance (Pa) at flow rate							
		A	B	C	8 l/s	13 l/s	21 l/s	29 l/s	37 l/s	45 l/s	53 l/s	61 l/s
<b>VA54119</b>	125 to 100	130	57	-	-	-	-	-	-	-	-	-
<b>428632</b>	150 to 125	155	57	-	-	-	-	-	-	-	-	-

## Equal Y Piece



Stock Ref	Duct Size	External Dimensions (mm)			Resistance (Pa) at flow rate							
		A	B	C	8 l/s	13 l/s	21 l/s	29 l/s	37 l/s	45 l/s	53 l/s	61 l/s
<b>497426</b>	100mm/4"	150	175	100	-	-	-	-	-	-	-	-
<b>497428</b>	125mm/5"	173	199	125	-	-	-	-	-	-	-	-
<b>497430</b>	150mm/6"	195	225	150	-	-	-	-	-	-	-	-

<sup>(a)</sup>Minimum insulation wall thickness 25mm. Insulation Thermal Conductivity: 0.04 W/(m.K)

# Pyrocheck Fire Airbricks

- Compliant with Approved Document B
- Compliant with Building (Scotland) Technical Handbook 2019
- Designed for both 204x60 & 220x90 ducting
- Double and Single Airbrick Versions available in 5 RAL colours
- Bezelled version for exterior cladding, render or composite
- Corrosion resistance - salt spray tested to BS EN ISO 9227:2012
- Polyester Powder Coating EN13501-1 classification A2-s1,d0
- Performance tested to BS EN13141-2:2010
- Low resistance design to ensure high airflow
- Material 0.9mm electrogalvanized Sheet Steel, fire class A1



Fire ductwork improves the safe operation of ventilation systems by minimising the chance of fire spread.

A1 Fire metal ducting kits and fire airbricks manufactured in the UK to comply with the latest Part B regulations. Perfect for multi-storey developments which require all materials forming part of the external wall to be made from non-combustible materials.

Galvanised steel is considered fire class A1 without testing, as per European Commission paper 96/603/EC referred to in BS EN 13501-1:2018. The material remains robust at elevated temperatures and has a high melting point temperature of 1450-1520° C. Classification: A1. Definition: Non-combustible. Description: No contribution to fire.

- EN-13501-1:2018
- BS EN 13141-2:2010
- BS EN ISO 9227:2012 (Corrosion Resistance)
- CLASSIFICATION A2-S1; d0 (Powder Coating)
- A1 (Base Material)

## Models


### Fire Airbrick 204x60

Model	Colour	With Duct Stock Ref.	Without Duct Stock Ref.
Single Grille	White (RAL 9003)	412934	413682
Single Grille	Brown (RAL 8017)	412935	413683
Single Grille	Cotswold Stone (RAL 1001)	412936	413684
Single Grille	Grey (RAL 7037)	412937	413685
Single Grille	Terracotta (RAL 8004)	412938	413686
Single Grille Flanged	White (RAL 9003)	412944	413692
Single Grille Flanged	Brown (RAL 8017)	412945	413693
Single Grille Flanged	Cotswold Stone (RAL 1001)	412946	413694
Single Grille Flanged	Grey (RAL 7037)	412947	413695
Single Grille Flanged	Terracotta (RAL 8004)	412948	413696


### Fire Airbrick 220x90

Model	Colour	With Duct Stock Ref.	Without Duct Stock Ref.
Double Grille	White (RAL 9003)	412939	413687
Double Grille	Brown (RAL 8017)	412940	413688
Double Grille	Cotswold Stone (RAL 1001)	412941	413689
Double Grille	Grey (RAL 7037)	412942	413690
Double Grille	Terracotta (RAL 8004)	412943	413691
Double Grille Flanged	White (RAL 9003)	412949	413697
Double Grille Flanged	Brown (RAL 8017)	412950	413698
Double Grille Flanged	Cotswold Stone (RAL 1001)	412951	413699
Double Grille Flanged	Grey (RAL 7037)	412952	413700
Double Grille Flanged	Terracotta (RAL 8004)	412953	413701

## Performance

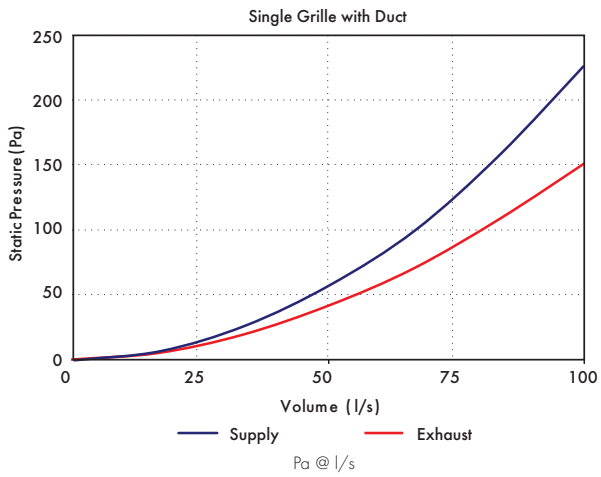


Volume (l/s)	15	35	50	65	85	100
Supply (Pa)	7	27	58	100	158	227
Exhaust (Pa)	5	19	42	71	109	152

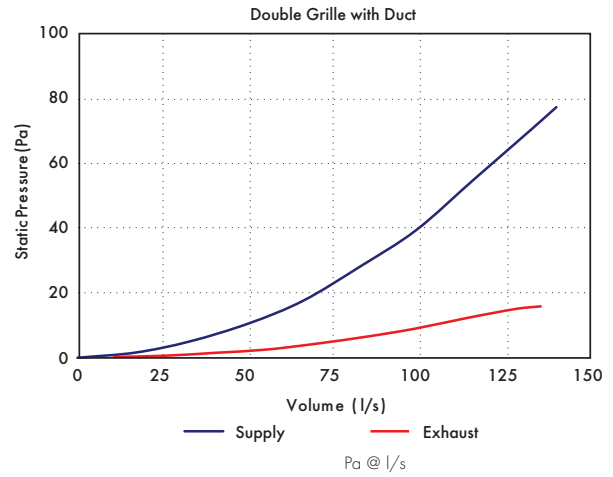


Volume (l/s)	15	35	50	65	85	100	115	130	140
Supply (Pa)	2	5	11	18	28	40	55	71	78
Exhaust (Pa)	0	1	2	4	6	9	12	15	16

## Dimensions (mm)

Single Grille with Duct

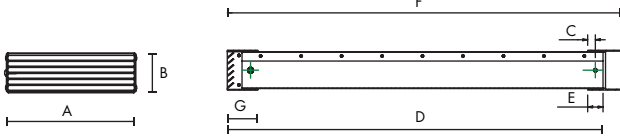

Double Grille with Duct

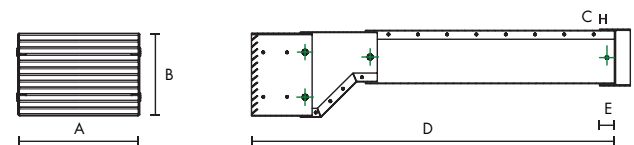

Model	Duct Size	A	B	C	D	E	F	G
Single Grille Flanged	204 x 60	245	90	12.5	613	25	640	50
Single Grille	204 x 60	210	65	12.5	613	25	640	50
Double Grille Flanged	220 x 90	245	165	12.5	613	25	640	-
Double Grille	220 x 90	210	140	12.5	613	25	640	-



# Fan Fire Collars

- Fire Protection Solution for 100mm and 125mm fans
- Fire Tested to BS EN 1365-2 on a loaded floor
- 30 Minute Fire Rating
- Test evidence for use in Solid Timber, Metal Web Joists and engineered I-Beam floor/ceiling systems



Our Fan Fire collars are designed to provide fire protection for penetrations in floor/ceiling systems when combined with 100mm and 125mm ceiling fans. In the event of a fire, the product's intumescent lining expands to seal off the ceiling opening, creating an effective fire barrier, reinstating the ceiling's fire rating.

Recessed ceiling fans are commonly used in both residential and commercial buildings. However, cutting a hole in the ceiling for a fan compromises the structure's integrity and its fire performance. To restore the original fire rating of the ceiling/floor construction, it is essential to firestop the penetration as required by the Part F Building Regulations or Technical Handbook in Scotland


The Ceiling Fan Firestop features a steel mounting ring with an integral intumescent lining and duct connector. This assembly is fixed into the ceiling lining, allowing for normal installation of the ceiling fan. Compatible with a variety of 100mm and 125mm ceiling fans.

## Model

**Description**  
 100mm Fan Fire Collar  
 125mm Fan Fire Collar


**Stock Ref**  
**413702**  
**413703**

## Fitting Instructions



### Step 1

Cut a hole in the ceiling to match the outside diameter of the sleeve on the Ceiling Fan Firestop mounting ring.




### Step 2

Push the Ceiling Fan Firestop mounting ring into the cut out aperture in the ceiling and fix through the collar using 4No. 3.5mm diameter by 42mm long drywall screws, to each of the pre drilled holes.




### Step 3

Ensure that the 2No. steel tabs are protruding towards the aperture within the collar, to prevent the duct sliding through the collar.



### Step 4

Install and fix the ceiling fan unit to the manufacturer's instructions, ensuring that the fan duct work spigot is centrally located within the firestop mounting ring.



### Step 5

Connect the ductwork to the ceiling fan duct spigot and the electrical supply as recommended by the fan manufacturer's instructions.

Note: The Ceiling Fan Firestops are not tested or approved for use in walls or partitions.

Fire Performance and \*Assessment in accordance with BS EN 1365-2

Joist Construction	Ceiling construction with appropriate fire rating	Supply and extract Diameter in mm	Product Fire Classification Rating (minutes)			Report Reference
			Integrity (E)	Insulation (I)	Classification (EI)	
Mitek PS10+ Timber Chord with Metal Web Joist	1 x 15mm Siniat GTEC fire boards	100	30	30	30	Warringtonfire - WF394530
JJI Joists Solid Timber Chord with OSB Web Joist	1 x 15mm Siniat GTEC fire boards	100 and 125	30	30	30	Warringtonfire - WF422978
Solid Timber joists		100 and 125	30	30	30	
Mitek PS10+ PAR/20405/01 Timber Chord with Metal Web Joist	1 x 15mm Siniat GTEC fire board or 2 x 12.5mm Siniat GTEC fire boards	100 and 125	30	30	30	* International Fire Consultants- Mitek PS10+ PAR/20405/01
Timber I beams		100 and 125	30	30	30	

30 minute rated floors to be minimum 1 x 15mm or 2 x 12.5mm thick GTEC Fireline fire rated plasterboard on the underside or alternative plasterboard types that demonstrate performance in a system tested to BS EN 1365-2: 2014 for a minimum period of 30 minutes up to the load as tested.

**Floor construction to one of the following:**

Mitek Posi-Joist made from min. 47mm wide x 70mm high top and bottom flanges and galvanised steel web

Timber joists min. 225mm high x 45mm wide C24 grade timber

Timber 'I' Beams which have been tested successfully in a system to BS EN 1365-2 for a minimum of 30 minutes up to the load which has been tested

In all above cases the fan/ducting must not penetrate any element of the loadbearing floor system other than the plasterboard layer.

Minimum spacing from other ceiling penetrations must be 200mm.




Ceiling Fan Firestop expands when exposed to heat.



**Note:** Vent-Axia does not guarantee compliance with Building Regulations Part B, Fire Spread or other regulations that relate to fire planning. Suitability to comply with these regulations should be determined prior to installation and in conjunction with Building Control Officers. Compliance with the Regulations is specifically excluded from quotations and designs. For further information, please contact our technical support department.

# Vent Duct Fire Sleeves

- Fire rated product up to EI 120 minutes
- Tested for masonry, concrete and plasterboard walls
- Tested in external wall / SFS constructions
- Can be installed within Ablative Coated Fire Batts
- CE Marked
- U/U - Uncapped/Uncapped tested as required for ventilated systems
- Can be retro fitted
- Low profile design
- Available preformed and ready to install in both circular or rectangular shapes
- Compressible material, offers accommodation for deflection
- No metal sleeving or boxing out required

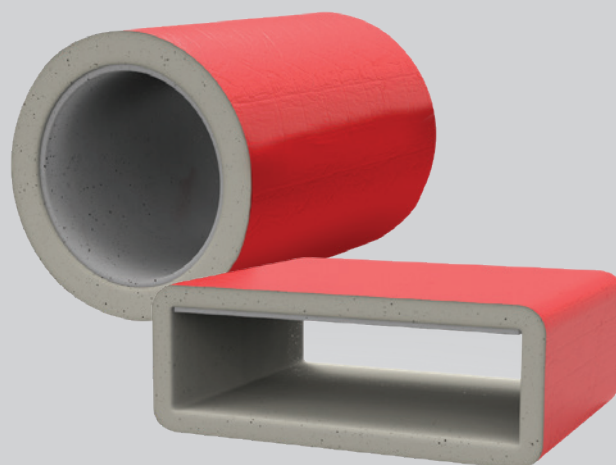


The FF109 Vent Duct Fire Sleeve Low Profiles (VDS LPs) are a family of CE Marked fire penetration seals designed to firestop PVC ventilation ducts/ pipes when installed through fire rated constructions.

The unique vacuum formed intumescent material design ensures that the expansion direction of the material crushes and seals the ducting in a fire situation without the need for any additional support or metal sleeving.

The lack of metal sleeving, not only makes installation easy, it also limits the risk of heat transfer through the structure as well as allowing compression to ensure a tight seal against fire and smoke or tight fitting against the ceiling soffit where needed.

The Fire Sleeves provide fire resistance ratings for Integrity (E) and Insulation (I) for up to EI120 minutes depending on the construction.


Fire Tested for both internal and external wall constructions. The Fire Sleeves are CE Marked with a European Technical Approval (ETA) based on extensive fire testing to BS EN 1366-3.



## Rectangular Fire sleeve - Low profile - 4 sided

Thickness:			10-15mm
CE Marked			
<b>Duct Size</b>	<b>Length</b>		<b>Stock Ref</b>
110x54mm	180mm		<b>407658</b>
204x60mm	180mm		<b>407659</b>
204x60mm	360mm		<b>474720</b>
220x90mm	180mm		<b>407660</b>


## Models



### Round Fire Sleeve - Low profile

Thickness:	10-15mm
Length:	280mm (180mm 407655)
CE Marked	
<b>Duct Size</b>	<b>Stock Ref</b>
100mm	<b>407655</b>
125mm	<b>407656</b>
150mm	<b>407657</b>

## Installation Variations

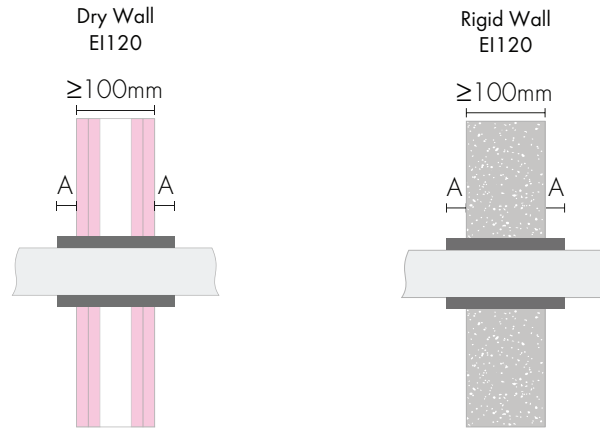


Test Standard	Duct Size Ref.	Duct Size (mm)	Duct Size Range (mm)	Wall		Min. Sleeve Length (mm)	Min. Protrusion (A) (mm)	Fire Rating	End Cap Conf.	Report No.
				Thickness (mm)	Material					
EN 1366-3	100	103	15-103	1.5	PVC	150	25	EI120	U/U	ETA 20-1164
EN 1366-3	125	127	15-127	1.8	PVC	250	75	EI120	U/U	ETA 20-1164
EN 1366-3	150	155	15-155	2.0	PVC	250	75	EI120	U/U	ETA 20-1164
EN 1366-3	110x54	110x54	110x54	1.5-1.8	PVC	150	25	EI120	U/U	ETA 20-1164
EN 1366-3	204x60	204x60	204x60	1.5-1.8	PVC	150	25	EI120	U/U	ETA 20-1164
EN 1366-3	220x90	220x90	220x90	1.5-1.8	PVC	150	25	EI120	U/U	ETA 20-1164

Service Support must be max. 300mm from the surface of the wall

Seals must be minimum 200mm apart

Rigid Walls must comprise concrete, aerated concrete or masonry with a minimum density of 650 kg/m<sup>3</sup> (wall type A, see ETA) or concrete or masonry with a minimum density of 1100 kg/m<sup>3</sup> (wall type B).

### Flexible Wall (external) EI90



#### Construction Build-Up

Celotex PIR Foil Faced Insulation 50mm thick / 31kg/m<sup>3</sup>

Siniat GTEC Weather Defence Board SE 1x12.5mm

Rockwool ProRox SL920 Rock Fibre Insulation 100mm thick / 45kg/m<sup>3</sup>

Metsec Steel Stud 90mm wide

Siniat GTEC Fire Board SE Plasterboard 2x12.5mm

Test Standard	Duct Size Ref.	Duct Size (mm)	Duct Size Range (mm)	Wall Thickness (mm)	Material	Min. Sleeve Length (mm)	Min. Protrusion (mm)	Fire Rating	End Cap Conf.	Report No.
EN 1366-3	100	103	15-103	1.8	PVC	180	25	EI90	U/U	WF 411551
EN 1366-3	125	127	15-127	1.8	PVC	180	25	EI90	U/U	WF 411551
EN 1366-3	110x54	110x54	110x54	2.25 (+/- 0/15mm)	PVC	180	25	EI90	U/U	WF 411551
EN 1366-3	204x60	204x60	204x60	2.25 (+/- 0/15mm)	PVC	180	25	EI90	U/U	WF 411551
EN 1366-3	220x90	220x90	220x90	2.25 (+/- 0/15mm)	PVC	180	25	EI90	U/U	WF 411551


Service Support must be max. 300mm from the surface of the wall

Seals must be minimum 200mm apart



**Note:** Vent-Axia does not guarantee compliance with Building Regulations Part B, Fire Spread or other regulations that relate to fire planning. Suitability to comply with these regulations should be determined prior to installation and in conjunction with Building Control Officers. Compliance with the Regulations is specifically excluded from quotations and designs. For further information, please contact our technical support department.

## Installation Variations


**Fire Batt**  
100, 110x54, 204x60 & 220x90mm ducts only  
30/60 mins

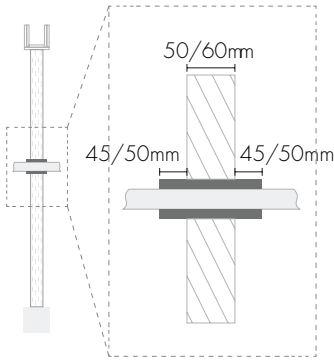



**Fire Batt**  
125 & 150mm ducts only  
30/60 mins

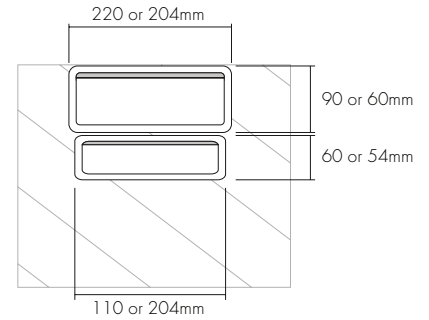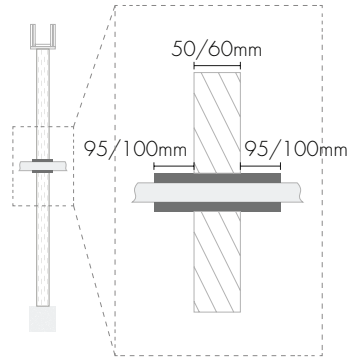

**Fire Batt**  
100, 110x54, 204x60 & 220x90mm ducts only  
90/120 mins



**Fire Batt**  
125 & 150mm ducts only  
90/120 mins



Test Standard	Duct Size Ref.	Duct Size (mm)	Wall Thickness (mm)	Material	Std. Sleeve Length (mm)	Min. Protrusion (mm)	Soffit Fix Allowed	Side by Side Installation	Stacked Ducts Allowed	Fire Rating	End Cap Configuration	Report No.
BS 476 Pt. 22	100	103	1.5	PVC	180	45/50mm or 25mm	N	N	N	30, 60, 90, 120	U/U	PAR/15162/01
BS 476 Pt. 22	125	127	1.8	PVC	280	95/100mm or 75mm	N	N	N	30, 60, 90, 120	U/U	PAR/15162/01
BS 476 Pt. 23	150	155	2.0	PVC	280	95/100mm or 75mm	N	N	N	30, 60, 90, 120	U/U	PAR/15162/01
BS 476 Pt. 22	110x54	110x54	1.5	PVC	180	45/50mm or 25mm	Y	Y	Y	30, 60, 90, 120	U/U	PAR/15162/01
BS 476 Pt. 22	204x60	204x60	1.5-1.8	PVC	180	45/50mm or 25mm	Y	Y	Y	30, 60, 90, 120	U/U	PAR/15162/01
BS 476 Pt. 22	220x90	220x90	1.8	PVC	180	45/50mm or 25mm	Y	Y	Y	30, 60, 90, 120	U/U	PAR/15162/01

Ablative Coated Batts, 50 or 60mm thick, must have suitable supporting documentation to demonstrate to the fire ratings required in accordance with BS476: Part 22

Min. spacing to seal edge or between penetrations must be 50mm

When rectangular ducts fixed underside the soffit, top edge of Fire Sleeve must be tight to the soffit, max. 5mm gaps allowable if sealed with intumescent acrylic sealant

When rectangular ducts fixed side by side, limited to maximum 3No., adjacent Fire Sleeves must be in close and constant contact

When rectangular ducts fixed side by side, ducts must be of the same size


When stacked ducts are installed, max. 2no. Stacked ducts of the same or similar size, e.g. 220x90 and 204x60 or 204x60 and 110x54.

Please refer to PAR/15162/01 for more limitations on multiple duct installations

Service Supports must be max. 300mm from the surface of the wall

Individual seal openings must be minimum 200mm apart

## Installation Variations

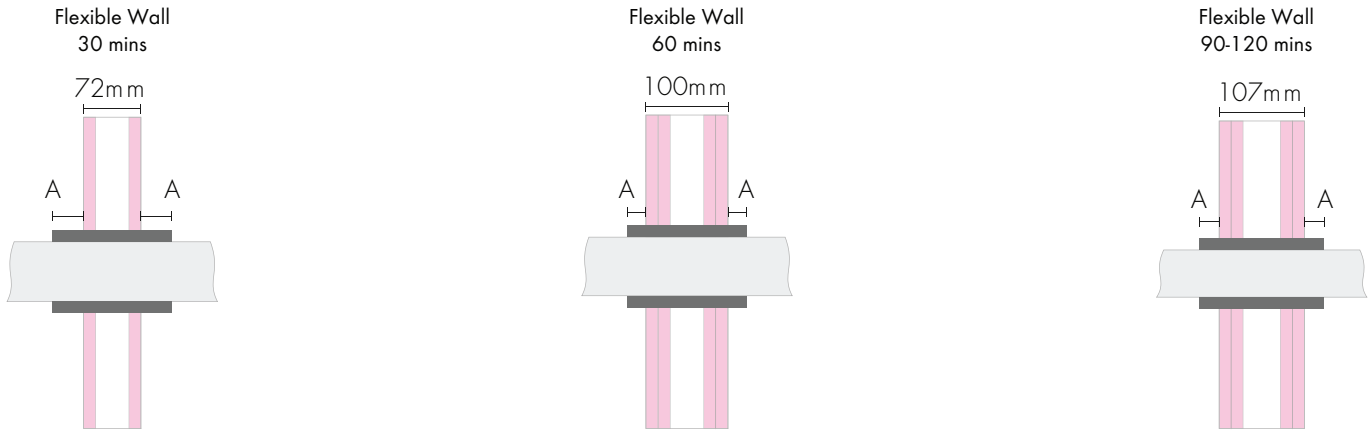

Test Standard	Duct Size Ref.	Duct Size (mm)	Wall Thickness (mm)	Material	Std. Sleeve Length (mm)	Min. Protrusion		Soffit Fix Allowed	Side by Side Installation	Fire Rating	End Cap Config.	Report No.
						in 72-99mm thick walls (mm)	in ≥100mm thick walls (mm)					
BS 476 Pt. 22	100	103	1.5	PVC	180	39	25	N	N	30,60,90,120	U/U	PAR/14600/01
BS 476 Pt. 22	125	127	1.8	PVC	280	89	75	N	N	30,60,90,120	U/U	PAR/14600/01
BS 476 Pt. 22	150	155	2.0	PVC	280	89	75	N	N	30,60,90,120	U/U	PAR/14600/01
BS 476 Pt. 22	110x54	110x54	1.5	PVC	180	39	25	Y	Y	30,60,90,120	U/U	PAR/14600/01
BS 476 Pt. 22	204x60	204x60	1.5-1.8	PVC	180	39	25	Y	Y	30,60,90,120	U/U	PAR/14600/01
BS 476 Pt. 22	220x90	220x90	1.8	PVC	180	39	25	Y	Y	30,60,90,120	U/U	PAR/14600/01

When rectangular ducts fixed underside the soffit, top edge of Fire Sleeve must be tight to the soffit, max. 5mm gaps allowable if sealed with intumescent acrylic sealant

When rectangular ducts fixed side by side, limited to maximum 3No., adjacent Fire Sleeves must be in close and constant contact

When rectangular ducts fixed side by side, ducts must be of the same size

Please refer to PAR/14600/01 for more limitations on multiple duct installations

Service Supports must be max. 300mm from the surface of the wall

Individual seal openings must be minimum 200mm apart

## Dimensions

Duct Size	Nominal Thickness	Nominal External Width /		Length
		Diameter	Nominal External Height	
110x54mm	10-15mm	134mm	83mm	180mm
204x60mm	10-15mm	228mm	89mm	180mm
204x60mm	10-15mm	228mm	89mm	360mm
220x90mm	10-15mm	244mm	124mm	180mm
220x90mm	10-15mm	244mm	124mm	360mm
100mm (103mm)	15mm	244mm	-	180mm
125mm (127mm)	15mm	160mm	-	280mm
150mm (155mm)	20mm	200mm	-	280mm

## Physical Properties

### Properties

Colour  
Finish  
Cuttability  
Compressibility  
Working Life  
Storage  
Transportation storage temperature  
Durability  
Smoke/Halogen Content


### Detail

Red  
Glossy label on reinforced aluminium foil  
Can be cut lengthways to retrofit  
Does compress  
48 years  
Dry, ambient  
-20°C to +70°C  
Type X intended for use in conditions exposed to weather (UV, rain, frost)  
Low Smoke / Zero Halogen

## Maintenance


No active maintenance required, where alterations are made around the product it should be checked visually to ensure that the product is still installed as per fitting instructions and tested systems.

## Fitting Instructions

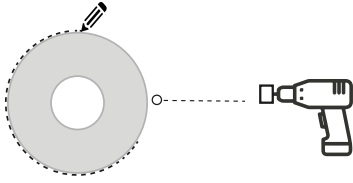


### Step 1a

If using a hole cutter for circular holes, ensure that the correct fire sleeve wall thickness (15mm + 15mm) 30mm total is added to the diameter of the pipe, this equals the aperture size. Cut the hole through the substrate using the correct blade, in the required location.




### Step 1b

If cutting without a hole cutter, using a pencil, draw around the fire sleeve at the required position of the aperture, ensure a tightly marked line. Use this line to cut the aperture through the substrate, using the required equipment as appropriate.

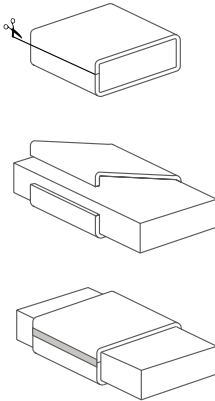


### Step 2

Unless the sleeve can be slid down the length of pipe/vent/duct to the aperture, carefully cut along the length of the fire sleeve, using a sharp knife or scissors, on a rectangular duct/vent cut centrally to one of the sides, place the sleeve around the pipe/duct/vent close to the aperture, and apply foil tape over the joint, where the sleeve was cut.



### Step 3

Push gently on the sleeve to pass it through the wall, if the sleeve covering starts to tear or if excessive resistance is felt, pull the sleeve back and trim the aperture. The sleeve should be pushed into the required position, ensuring that the required length of sleeve protrudes on either side of the wall.



### Step 4 (If required)

If required for the purpose of smoke and draft stop, air or water tightness and airborne sound insulation, the gap between opening edge and fire sleeve may be sealed off by a suitable acrylic intumescent mastic construction sealant approved for penetration sealing applications.





# Fire Rated Air Valves

- Extract and Supply versions
- 60 Minutes Fire Rating in Solid Timber Joist Floor/Ceilings Constructions
- 30 Minutes Fire Rating in I-Beam and Metal Web Joist Floor/Ceiling Constructions
- No maintenance required
- Meets requirements of Approved Document B
- Simple to install



Fire Rated Air Valves are a unique and cost effective fire rated solution where recessed ceiling air valves are to be installed in fire rated floor/ceiling constructions. In a fire situation, the integral intumescent material rapidly expands to seal off the air valve to help maintain the fire resistance rating of the ceiling. This limits the risk of fire and heat spread throughout the building.

The Fire Rated Air Valves are available in all common sizes for both Extract and Supply. The Fire Rated Air Valves are installed as normal and require no addition maintenance over and above standard cleaning as would be carried out for any air valve. The product requires no maintenance after installation. The Fire Rated Air Valves are suitable for domestic homes, as well as apartments, hotels and other multiple occupancy buildings where fire ratings exist.

## Fitting Instructions

- Cut hole in ceiling to suit the outside diameter of the air valve mounting ring
- Fix the air valve to the ceiling via the screw holes in the valve
- Attach ducting onto the air valve mounting ring
- Fit the body of the valve into the mounting ring with a quarter turn twist
- Set inner cone clearance to provide required air flow rate (max. 12mm)
- Ensure the air valve is fitted snugly within the ceiling with no gaps or voids
- The penetration is then sealed against the spread of fire and the fire rating
- Other ceiling penetrations must be fitted a minimum of 200mm apart from the Fire Rated Air Valves

## Test Data

Report Type	Fire Test Lab	Report Number	Construction	Fire Rating
Full Scale Loaded Floor Fire Test to BS EN 1365-2	The Building Test Centre	BTC18074F / BTC 21144FA	Solid Timber Joist Floor	60 Minutes
Full Scale Loaded Floor Fire Test to BS EN 1365-2	Warrington Fire	422978	I-Beam Joist Floor	30 Minutes
Full Scale Loaded Floor Fire Test to BS EN 1365-2	Warrington Fire	394530	Metal Web Joist Floor	30 Minutes

## Storage & Durability

Storage	Dry, ambient
Transportation storage temperature	-20°C to +70°C
Working Life	48 years
Durability	Type X intended for use in conditions exposed to weather (UV, rain, frost)
Fungal Resistance	Protected by polythene
Smoke/Halogen Content	Low Smoke / Zero Halogen

## Models

Duct Size	Extract Stock Ref	Supply Stock Ref
100 Ø	403431	475661
125 Ø	403432	475662
150 Ø	403433	475663
200 Ø	408828	475664



**Note:** Vent-Axia does not guarantee compliance with Building Regulations Part B, Fire Spread or other regulations that relate to fire planning. Suitability to comply with these regulations should be determined prior to installation and in conjunction with Building Control Officers. Compliance with the Regulations is specifically excluded from quotations and designs. For further information, please contact our technical support department.

# Circular Supply & Exhaust Diffusers

- Manufactured from powder coated steel
- Suitable for supplying or exhausting air
- Can be fitted directly to the duct or in the ceiling
- Available in 100 and 125mm diameter sizes



## Models

### Model

100mmØ Supply


125mmØ Exhaust

### Stock Ref

10543100

10544125


## Dimensions (mm)



Dia.	Model	Stock Ref	a	b	c	Weight	
						valve	frame
100	Supply	10543100	100	80	150	0.15	0.09
125	Exhaust	10544125	125	96	158	0.15	0.13


## Performance

Diameter 100mm

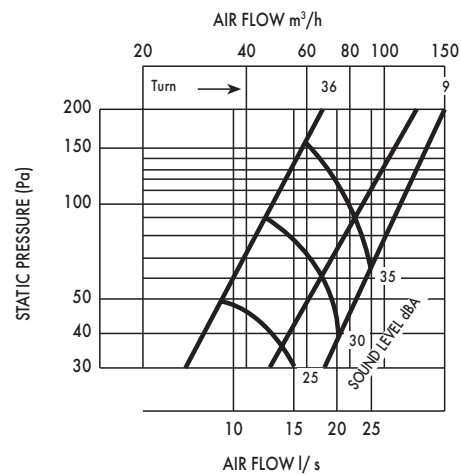


eg. 100mm diameter supply diffuser. Design 15l/s flow  
 3 turns ~ 30-35 dBA ~ 130Pa  
 6 turns ~ 25-30 dBA ~ 40Pa

Diameter 125mm

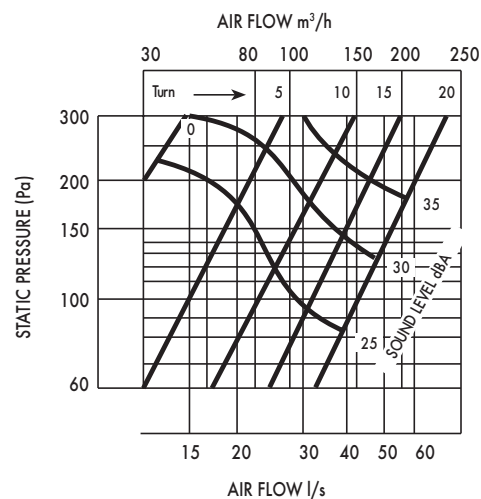

# Uniflexplus+ RV Adjustable Valve

- One valve for air supply and extraction: suitable for up to 21l/s
- Easy to adjust: 26 lockable positions for setting the air volume
- Excellent performance: the lowest noise and pressure drop values
- Same appearance for each volume of air: external dimensions stay the same irrespective of the selected setting
- Low turbulence airflows: prevents accumulation of dirt around the valve
- Flexible installation for all types of air ducts with connection Ø116 or Ø125
- Easy to clean: no need to remove the valve base
- Multiple designs available to suit various interior styles

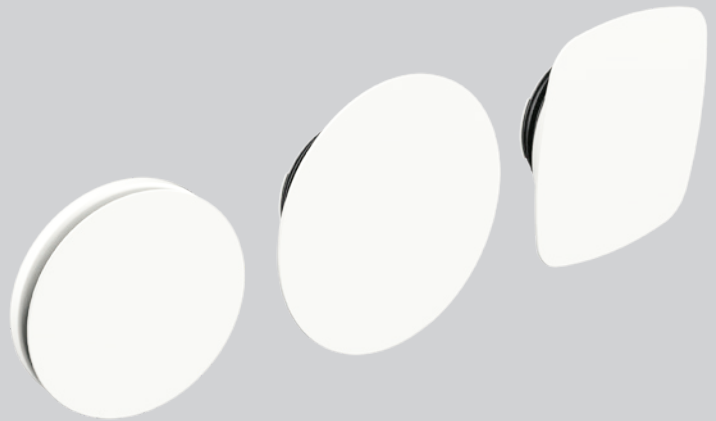

## Adjusting and locking

The Uniflexplus+ air distribution system has been designed to make installing and adjusting ventilation as quick and as easy as possible. With the Uniflexplus+ RV adjustable valve, the supply and extraction of air can be set and locked at fixed volumes in an instant.


The Uniflexplus+ RV is easy to install, even in suspended ceilings (with the aid of the special collar). The valve is also easy to maintain, as the base of the valve does not need to be removed from the ceiling. The air volume is adjusted entirely in the interior of the valve. This means that the external dimensions – and therefore the appearance – of the valves are always the same.

## Airtight and quiet

Uniflexplus+ is well known for its airtight connection without the use of mounting aids. Uniflexplus+ RV combines this with unique noise performance levels. Thanks to very low resistances, it is possible to meet the highest requirements in terms of comfort. If necessary, 120° of the supply/extraction opening can be blocked. In addition, the adjustable valve contains antistatic and antibacterial additives and is UV-resistant.

## Different versions

A great deal of attention has been devoted to the design of the adjustable valve and the materials used in it. It has an elegant appearance, with three different designs to suit various interior styles (RV 125, RVG 125 & RVV 125).



1. Collar (Accessory: RVK)
2. Base
3. Blanking plate (Accessory: RVB)
4. Regulating cone

## Models



Adjustable Round Valve  
Model  
RV 125

Stock Ref  
**479372**



Adjustable Round Valve Large  
Model  
RVG 125

Stock Ref  
**479373**



Adjustable Square Valve  
Model  
RVV 125

Stock Ref  
**479374**

## Accessories



Collar  
Model  
RVK

Stock Ref  
**479376**



Blanking Plate\*  
Model  
RVB

Stock Ref  
**479377**


\*Not suitable for RVV 125 model

## Specification


Model	Weight (g)	Colour	Material
RV 125	230	RAL 9003	ASA
RVG 125	410		ASA, powder-coated ALU
RVV 125	450		ASA, powder-coated ALU

## Dimensions (mm)


Front view  
RV 125 / RVG 125



RVV 125





Side view  
(Based on drawing of RV 125)

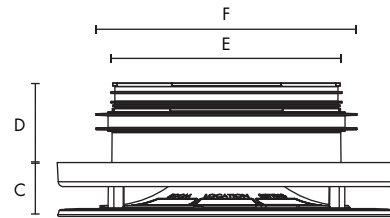

AØ	B	C	D	EØ	FØ
170/215	215	27	40	116	125

## Performance supply

For each valve setting, the noise and pressure drop performance characteristics are shown in relation to the various air volumes.

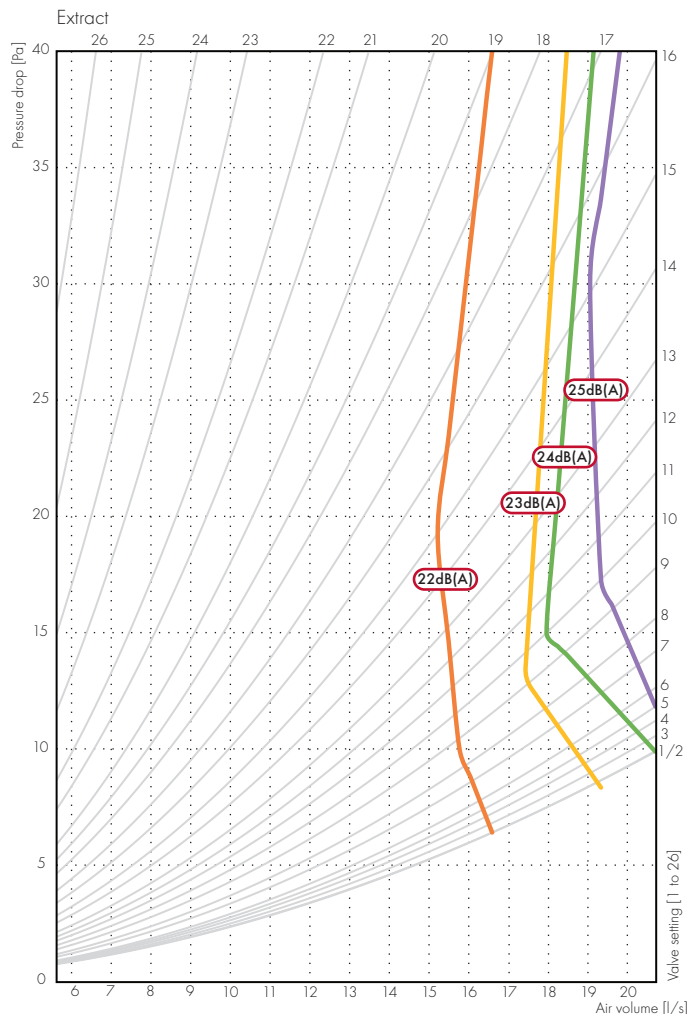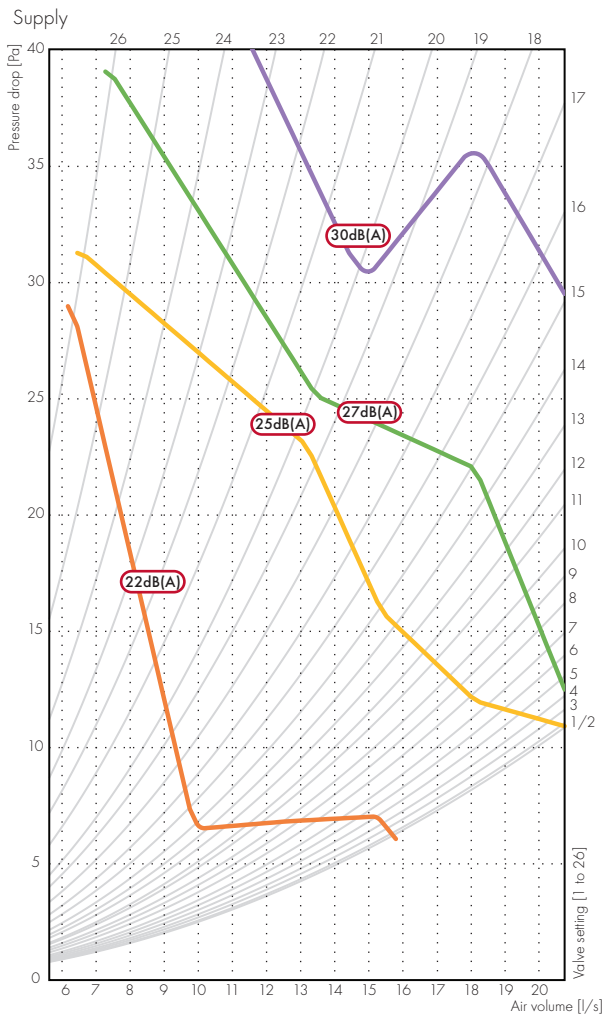

Tested in accordance with: EN ISO 5135:1999

# Low Resistance Inlet/Outlet Air Brick

- Provides over 90% free area of duct
- Easier to install than a double air brick
- Guide vanes for improved duct connection
- Optional first fix duct section



Available in five colours, this low resistance air brick has been designed to comply with the latest Building Regulations Approved Document F, which requires a ventilation outlet to achieve a minimum of 90% of the cross sectional area of the ductwork.

Installing a single air brick is much simpler than a double air brick and offers more versatility for locations.

Suitable for installation with round 100mm and 125mm diameter and rectangular 204 x 60mm ducting.

Attaching duct to the air brick is simplified by the use of guide vanes which help locate the duct onto the spigot.

A 500mm section of 204 x 60 duct is available for first fix which ensures that connections are accessible after completion of building works.

Five colour options ensure that the low resistance air brick will be a match for almost any application.


## Models

Model	Stock Ref
White	449223
Brown	449224
Cotswold Stone	449225
Grey	449226
Terracotta	449227
1st Fix duct section	403255
500 x 204 x 60	

## Available Colours




## Performance Guide

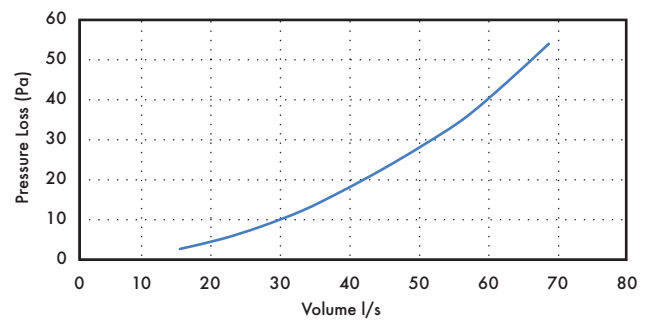


Pressure (Pa)	Volume (m <sup>3</sup> /h)	Volume (l/s)
2.7	53.7	14.9
5.2	75.9	21.1
8.3	97.0	26.9
12.4	119.4	33.2
17.4	141.0	39.2
22.7	162.0	45.0
28.7	183.7	51.0
35.4	205.6	57.1
44.1	227.6	63.2
54.0	250.4	69.6

## Dimensions (mm)

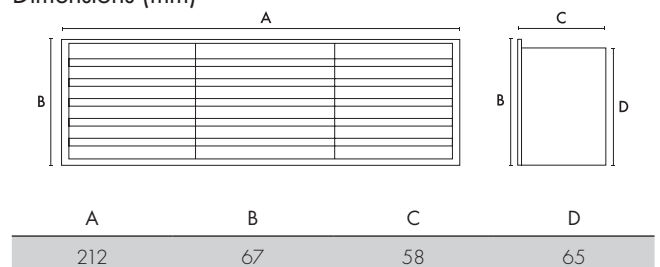

# Universal Roof Vents

- Models available for both pitched and flat roof types
- Complies with Building Regulations
- Suitable for most installations
- Corrosion resistant and weather proof
- Compatible with both mechanical and natural ventilation systems
- Three colours available for pitched roof vents

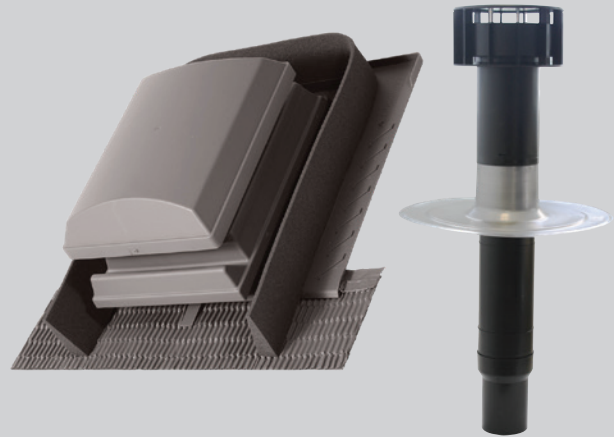

Wholehouse ventilation systems require termination to the external atmosphere, often through the roof. To ensure that the ventilation system is able to achieve its optimum level of performance, it is important that a suitable roof termination product is installed.

With this in mind, Vent-Axia is pleased to offer a range of Universal Roof Vents; including products suitable for both pitched and flat roof types.

A selection of colours and sizes should ensure that our range offers a product suitable for most residential applications with a pitched or flat roof. Pitched roof vents are available in a variety of colours as detailed in the Specification Table - custom colour and textured vents to match your exact needs are also available at an extra charge. Please contact our Technical Support team for more details.


Stock Ref	Tile Type	Spigot mm	Colour	Airflow Resistance (Pa) at l/s				
				14	28	56	83	140
407329	Universal*	125	Red	1.1	4.1	16.8	N/A	N/A
407330	Universal*	125	Brown	1.1	4.1	16.8	N/A	N/A
407331	Universal*	125	Grey	1.1	4.1	16.8	N/A	N/A
407332	Universal*	150	Red	0.3	1.0	4.2	9.5	27.4
407333	Universal*	150	Brown	0.3	1.0	4.2	9.5	27.4
407334	Universal*	150	Grey	0.3	1.0	4.2	9.5	27.4
407335	Slate	125	Slate Blue/Black	1.1	4.1	16.8	N/A	N/A
407336	Slate	150	Slate Blue/Black	0.3	1.0	4.2	9.5	27.4

\*Universal Roof Vents are not suitable for the following tile types: Plain, Clay Single Pantiles, Forticrete Centurion, Goxhill Gaelic Tiles, Double Lap or Interlocking Slates. If the Universal Roof Vent does not meet your requirements, please contact our Technical Support team for a bespoke solution

## Models

### Universal Roof Vent suitable for Pitched Roofs

Manufactured in the UK, these products have been specifically developed for use with both natural and mechanical ventilation systems.



All models have been independently tested by the BRE to BS476 Part 3: 2004 and have been awarded an AA classification - the highest possible. Thus they can be installed without restriction on any pitched roof.

All models have low resistances to airflow (see table) and incorporate condensation grooves to prevent any condensate running back down the duct. Universal Roof Vents are designed to resist the ingress of deluge and driving rain. Universal Roof Vents (pitched roof models) are suitable for roof pitches between 20° and 60°.

The pitched roof vents are available as a 'tiled' roof vent to fit alongside most traditional roof tiles, as well as a 'slate' version which can be easily cut down to fit alongside all traditional roof slates.

### Universal Roof Vent suitable for Flat Roofs

Capped stacks for use in asphalt and built-up felt roofs. Special low air resistance cowl - the pressure/airflow resistance is <1.0 Pascal at 63l/s. The pipework above the roofline is twin walled and incorporates an integral condensation drain. The stack pipe has an integral collar and separate aluminium flange for use with both felt and asphalt roof finishes.




All Vent-Axia Universal Roof Vents have a free area exceeding those required by Building Regulations.

Stock Ref	Colour	Free Vent Area mm <sup>2</sup>	Pressure/Airflow Resistance	Dia. mm	Height Above Roof mm	Flange Dia. mm	Depth Below Flange mm
407337	Black	8,400	<1.0	110	300	395	350
407338	Black	12,000	<1.0	131	400	450	350
407339	Black	20,000	<1.0	166	540	450	510





# Non-Residential Heat Recovery

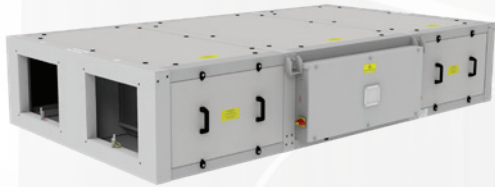

Vent-Axia's Sentinel Apex range of commercial heat recovery units with up to 93% EN308 heat recovery efficiency, low sound levels and low specific fan powers the range provides high levels of performance efficiently. A new advanced control system that provides on board control, in room control and App based control full functionality commissioning and monitoring is simply provided. This control can be coupled with Vent-Axia's new range of sensors with wired or wireless communication providing close control of, and monitoring of your indoor air quality. Sensors include CO<sub>2</sub>, humidity and temperature and provide both proportional and switch control.

**Vent-Axia**





Sentinel Apex HR06

168-171

---



Sentinel Apex HR10

172-175

---



Sentinel Apex HR15

176-179

---



Sentinel Apex HR21

180-183

---

# Sentinel Apex HR06

- Very low sound levels independently tested and verified by SRL
- Low SFP utilising IE 5 equivalent motors
- High Heat Recovery Efficiency – up to 93% (EN308)
- Automatic summer bypass sized to eliminate performance loss
- ePM10 50% and ePM1 50% filters as standard (M5 / F7 equivalent)
- Filter access from bottom and side as standard
- Digital on board controller and remote room controller as standard
- App connectivity as standard
- Wired and Wireless communication sensors available
- Integral condensate tray and pump
- Electric frost protection heater as standard



## Performance simply delivered with more as standard

Vent-Axia's Sentinel Apex range of commercial heat recovery units with up to 93% EN308 heat recovery efficiency, low sound levels and low specific fan powers the range provides high levels of performance efficiently. A new advanced control system that provides on board control, in room control and App based control full functionality commissioning and monitoring is simply provided. This control can be coupled with Vent-Axia's new range of sensors with wired or wireless communication providing close control of, and monitoring of your indoor air quality. Sensors include CO<sub>2</sub>, humidity and temperature and provide both proportional and switch control.

The Sentinel Apex HR06 unit is manufactured with a double skinned pentapost construction incorporating aluzinc frames and panels. The panels are acoustically and thermally treated with 90kg/m<sup>3</sup> high efficiency acoustic and thermally insulating foam (fire retardant to BS476 Part 7 Class 1 & Part 6 Class O). The construction of the unit, IPX4, allows for internal and external mounting as standard, however, the roof assembly should be included for full external locations.

The housing is designed to be as compact as possible for concealed false ceiling applications with top and bottom access panels for maintenance. Access panels are sized to enable single person maintenance.

The fans utilised in the Sentinel Apex HR06 are the latest EC/DC external rotor motors specifically chosen for their low power consumption and low noise characteristics. The assembly is dynamically balanced to DIN ISO 1940 Grade 6.3. Ball bearings are greased for life. Insulation is Class 'B' (from -25°C to +60°C). All models incorporate internal electronic overload protection and a soft start function.

The Sentinel Apex HR06 is complete as standard with ISO ePM10 50% (M5) extract filter and ISO ePM1 50% (F7) supply, complete with a filter change warning. Filters have been selected to fully comply with the requirements of ISO16890 whilst having low pressure loss characteristics.

An integral electric frost heater is included to provide frost protection of the cell and filters down to -10°C.

The unit is complete with an integral summer bypass facility which has been designed to provide full bypass without impact to the airflow or

power consumption of the unit whilst in bypass mode.

Airflow and power consumption tested in accordance with BS EN 5801. Sound data derived from independent testing at Sound Research Laboratories in accordance with EN ISO 3741:2010. Published dB(A) figures are free field sound pressure levels at 3m with spherical propagation at a reference level of 2 x 10<sup>-5</sup> Pa. The inlet/outlet sound power level spectra figures are dB with a reference of 10<sup>-12</sup> watts.

An integral condensate tray is fitted along with an internal quiet running high quality pump allowing for removal of the condensate via a 10mm condensate pipe.

To facilitate normal access and maintenance to the unit there are both side and bottom access panels as standard. Should it be required, all panels are removable allowing access and removal of the heat recovery cell and all other components. A lockable isolator is fitted to the control panel preventing accidental operation whilst any maintenance is being carried out.


The electrical supply for the unit is 230V +/- 10% / 50/60Hz / 1ph. A 24V DC power is available from the unit for powering any of the matched sensors and switches.

The Sentinel Apex HR06 unit is fitted with an integrated control system as standard with a purpose designed user interface controller incorporating an alphanumeric 2 line display with 4 button keypad for fan status and a basic commissioning setup mounted within the control panel. A remote HMI is also included for that can be mounted within the room that is being ventilated. This allows for local monitoring of the unit along with the commissioning set-up.

App based control is also available via the Vent-Axia Connect App. This provides detailed commissioning and monitoring information and the ability to control the unit remotely.



A full range of sensors is available including humidity, temperature and CO<sub>2</sub> monitoring. These sensors are available for both wired and wireless communication with the wireless sensors being either local mains or battery powered.

Dimensions (mm)

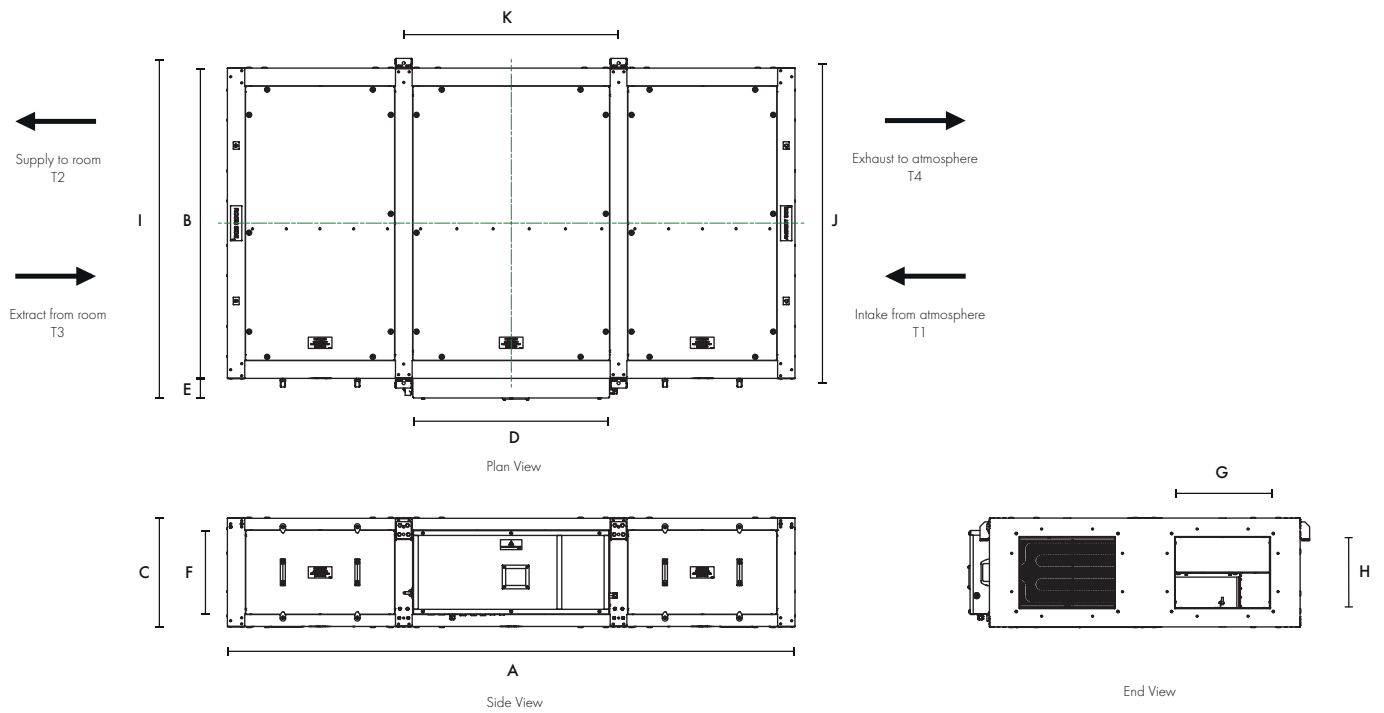


A (LENGTH)	B (WIDTH)	C (HEIGHT)	D	E	F	G	H	I	J	K	kg
2141	1323	350	719	89	248	400	200	1450	1363	791	275

Heat Recovery Efficiency

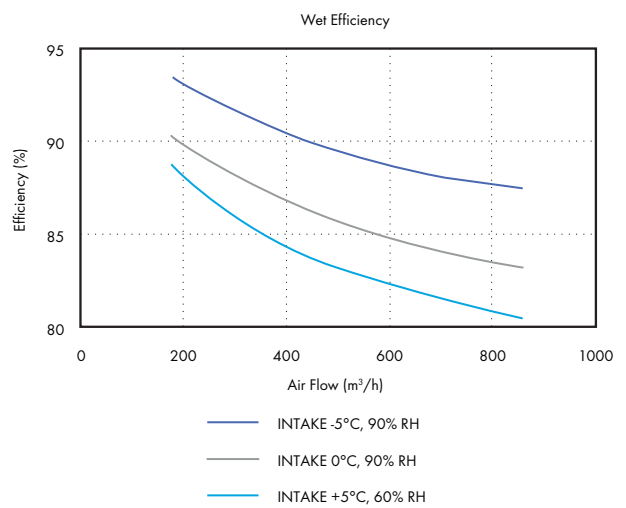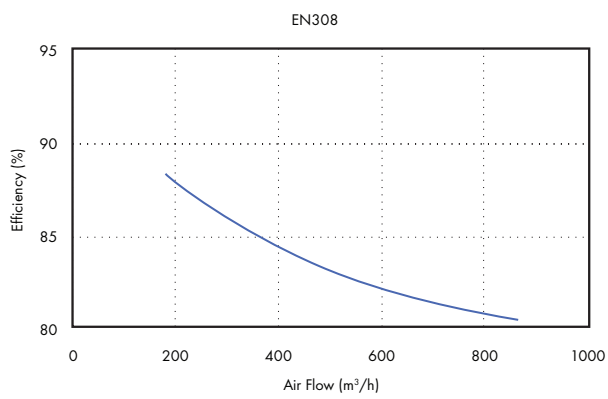

## Performance Guide - Sentinel Apex HR06

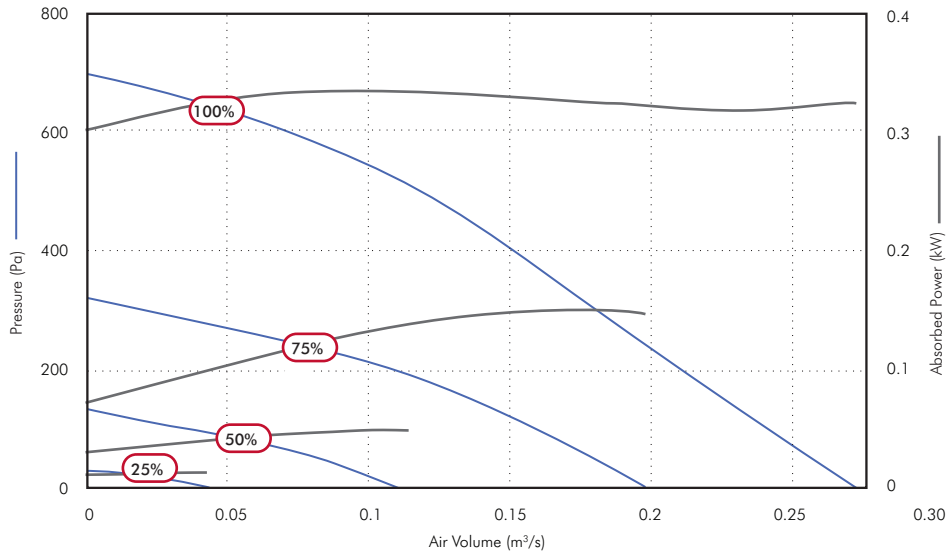

Speed	Airflow, m <sup>3</sup> /s @ Pa											Fans F.L.C.	Supply Voltage	Frost Heater	Unit Rated Current	
	0	25	50	100	150	200	250	300	400	500						
100%	m <sup>3</sup> /s	0.27	0.27	0.26	0.24	0.22	0.21	0.19	0.18	0.15	0.12	1.5A	230/1/50	2.4kW	12A	
	SFP	1.19	1.21	1.25	1.34	1.42	1.51	1.67	1.82	2.19	2.78					
	kW	0.323	0.320	0.320	0.318	0.318	0.318	0.320	0.323	0.334	0.334					
75%	m <sup>3</sup> /s	0.20	0.19	0.18	0.16	0.13	0.11	0.07								
	SFP	0.73	0.77	0.84	0.93	1.07	1.23	1.66								
	kW	0.144	0.145	0.147	0.147	0.143	0.132	0.116								
50%	m <sup>3</sup> /s	0.11	0.10	0.08	0.04											
	SFP	0.41	0.47	0.55	0.95											
	kW	0.045	0.045	0.044	0.036											
25%	m <sup>3</sup> /s	0.04	0.01													
	SFP	0.012	0.27													
	kW	0.011	1.06													

## Sound Data - Sentinel Apex HR06

Speed	Test Mode	Sound Pressure level @ 3.0m dBA								
		63	125	250	500	1k	2k	4k	8k	
100%	Breakout	58	54	56	48	46	43	35	29	32
	Exhaust T4	58	55	61	54	54	54	46	36	
	Extract T3	64	64	72	64	56	56	55	48	
	Intake T1	64	64	71	63	57	56	55	48	
	Supply T2	58	54	59	53	53	54	46	36	
75%	Breakout	53	52	54	40	39	36	29	23	27
	Exhaust T4	52	50	52	47	46	47	39	28	
	Extract T3	60	59	68	54	48	48	47	40	
	Intake T1	59	59	67	55	50	49	47	39	
	Supply T2	52	50	54	46	47	48	39	28	
50%	Breakout	46	51	38	30	28	26	25	21	17
	Exhaust T4	45	55	41	36	35	35	26	23	
	Extract T3	53	64	53	44	37	36	34	26	
	Intake T1	54	68	53	44	39	37	34	26	
	Supply T2	45	49	41	35	35	36	26	24	
25%	Breakout	40	35	30	17	19	16	22	21	9
	Exhaust T4	38	32	27	21	19	17	18	23	
	Extract T3	44	43	35	28	20	18	19	23	
	Intake T1	44	40	35	27	21	18	18	23	
	Supply T2	37	32	27	21	19	18	19	24	

For full sound and performance data please use our Fan Selection Program [www.vent-axia.com/fanselector/product/apex](http://www.vent-axia.com/fanselector/product/apex)

Sound data derived from independent testing at Sound Research Laboratories in accordance with EN ISO 3741:2010. Published dB(A) figures are free field sound pressure levels at 3m with spherical propagation at a reference level of  $2 \times 10^{-5}$  Pa. The inlet/outlet sound power level spectra figures are dB with a reference of  $10^{-12}$  watts.

## Accessories

### Attenuator



Single skinned attenuators purpose designed for the Apex Heat Recovery range to minimise in duct noise. Attenuators are supplied in standard lengths of 900mm, 1200mm and 1500mm, constructed from Galvanised steel with profiled perforated sheet internal, mineral wool sound absorbing material and 30mm profiled flanges for duct and unit mounting. Data has been obtained by testing in accordance with BS EN ISO7235:2009.

Stock Ref.	Dimensions (mm)			kg	Insertion Loss dB								m <sup>3</sup> /hr @ Pa		
	Length	Width	Height		63	125	250	500	1k	2k	4k	8k	300	600	1000
ATT900-HR06	900	400	200	17	2	5	11	19	33	39	31	24	8	30	83
ATT1200-HR06	1200	400	200	21	3	6	14	26	43	45	35	27	8	33	92
ATT1500-HR06	1500	400	200	31	4	7	18	32	52	52	38	30	9	37	103


### Duct mounted Heating / Cooling



Rectangular duct mounted heater battery with either electric heating complete with integral thyristor controls, or LPHW water heating, each designed to provide approximately 10°C temperature rise. Chilled water cooler also available with integral condensate tray. Note waterside controls are not included.

Stock Ref.	Type	Dimensions (mm)			kg	Heater rating kW	Electrical supply	Water Temp			m <sup>3</sup> /hr @ Pa		
		Length	Width	Height				Flow	Return	Connection	300	600	1000
EHB-HR06	HR 6 Duct mounted Rectangular electric heater with controls	300	400	200	5	2.00	230/1/50	N/A	N/A	N/A	8	33	92
HWB-HR06	HR 6 Duct mounted Rectangular LPHW heating battery	200	400	200	5	2.01	N/A	80°C	60°C	1/2"	8	33	92
CWB-HR06	HR 6 Duct mounted Rectangular water cooling battery	200	400	200	5	2.52	N/A	6°C	12°C	3/4"	8	33	92

### Roof Assembly



Pitched roof for external mounting, supplied separate for fitting on site.

Stock Ref	Length mm	Width mm	Height mm	Weight kg
WRF-HR06	2141	1455	95	48

### Intake / Exhaust Cowl



Weather inlet/discharge cowl for external mounting (one required for each airstream).

Stock Ref	Length mm	Width mm	Height mm	Weight kg
497218	294	402	274	4

### Transformation Piece



Rectangular to round transformation piece designed to fix directly to the unit or any of the specific HR06 duct accessories to enable connection to 250mm round ducting.

Stock Ref	Length mm	Width mm	Height mm	Weight kg
497222	250	400	200	3

### Flexible Connection




Stock Ref	Length mm	Width mm	Height mm	Weight kg
497018	130	400	200	3



# Sentinel Apex HR10

- Very low sound levels independently tested and verified by SRL
- Low SFP utilising IE 5 equivalent motors
- High Heat Recovery Efficiency - up to 93% (EN308)
- Automatic summer bypass sized to eliminate performance loss
- ePM10 50% and ePM1 50% filters as standard (M5 / F7 equivalent)
- Filter access from bottom and side as standard
- Digital on board controller and remote room controller as standard
- App connectivity as standard
- Wired and Wireless communication sensors available
- Integral condensate tray and pump
- Electric frost protection heater as standard

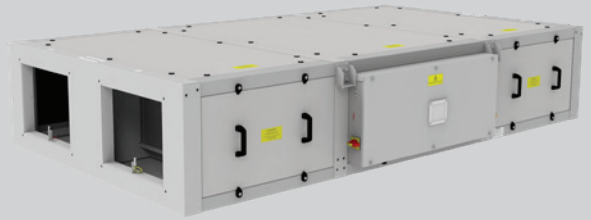

## Performance simply delivered with more as standard

Vent-Axia's Sentinel Apex range of commercial heat recovery units with up to 93% EN308 heat recovery efficiency, low sound levels and low specific fan powers the range provides high levels of performance efficiently. A new advanced control system that provides on board control, in room control and App based control full functionality commissioning and monitoring is simply provided. This control can be coupled with Vent-Axia's new range of sensors with wired or wireless communication providing close control of, and monitoring of your indoor air quality. Sensors include CO<sub>2</sub>, humidity and temperature and provide both proportional and switch control.

The Sentinel Apex HR10 unit is manufactured with a double skinned pentapost construction incorporating aluzinc frames and panels. The panels are acoustically and thermally treated with 90kg/m<sup>3</sup> high efficiency acoustic and thermally insulating foam (fire retardant to BS476 Part 7 Class 1 & Part 6 Class O). The construction of the unit, IPX4, allows for internal and external mounting as standard, however, the roof assembly should be included for full external locations.

The housing is designed to be as compact as possible for concealed false ceiling applications with top and bottom access panels for maintenance. Access panels are sized to enable single person maintenance.

The fans utilised in the Sentinel Apex HR10 are the latest EC/DC external rotor motors specifically chosen for their low power consumption and low noise characteristics. The assembly is dynamically balanced to DIN ISO 1940 Grade 6.3. Ball bearings are greased for life. Insulation is Class 'B' (from -25°C to +60°C). All models incorporate internal electronic overload protection and a soft start function.

The Sentinel Apex HR10 is complete as standard with ISO ePM10 50% (M5) extract filter and ISO ePM1 50% (F7) supply, complete with a filter change warning. Filters have been selected to fully comply with the requirements of ISO16890 whilst having low pressure loss characteristics.

An integral electric frost heater is included to provide frost protection of the cell and filters down to -10°C.

The unit is complete with an integral summer bypass facility which has been designed to provide full bypass without impact to the airflow or

power consumption of the unit whilst in bypass mode.

Airflow and power consumption tested in accordance with BS EN 5801. Sound data derived from independent testing at Sound Research Laboratories in accordance with EN ISO 3741:2010. Published dB(A) figures are free field sound pressure levels at 3m with spherical propagation at a reference level of 2 x 10<sup>-5</sup> Pa. The inlet/outlet sound power level spectra figures are dB with a reference of 10<sup>-12</sup> watts.

An integral condensate tray is fitted along with an internal quiet running high quality pump allowing for removal of the condensate via a 10mm condensate pipe.

To facilitate normal access and maintenance to the unit there are both side and bottom access panels as standard. Should it be required, all panels are removable allowing access and removal of the heat recovery cell and all other components. A lockable isolator is fitted to the control panel preventing accidental operation whilst any maintenance is being carried out.

The electrical supply for the unit is 230V +/- 10% / 50/60Hz / 1ph. A 24V DC power is available from the unit for powering any of the matched sensors and switches.


The Sentinel Apex HR10 unit is fitted with an integrated control system as standard with a purpose designed user interface controller incorporating an alphanumeric 2 line display with 4 button keypad for fan status and a basic commissioning setup mounted within the control panel. A remote HMI is also included for that can be mounted within the room that is being ventilated. This allows for local monitoring of the unit along with the commissioning set-up.

App based control is also available via the Vent-Axia Connect App. This provides detailed commissioning and monitoring information and the ability to control the unit remotely.

A full range of sensors is available including humidity, temperature and CO<sub>2</sub> monitoring. These sensors are available for both wired and wireless communication with the wireless sensors being either local mains or battery powered.





Dimensions (mm)

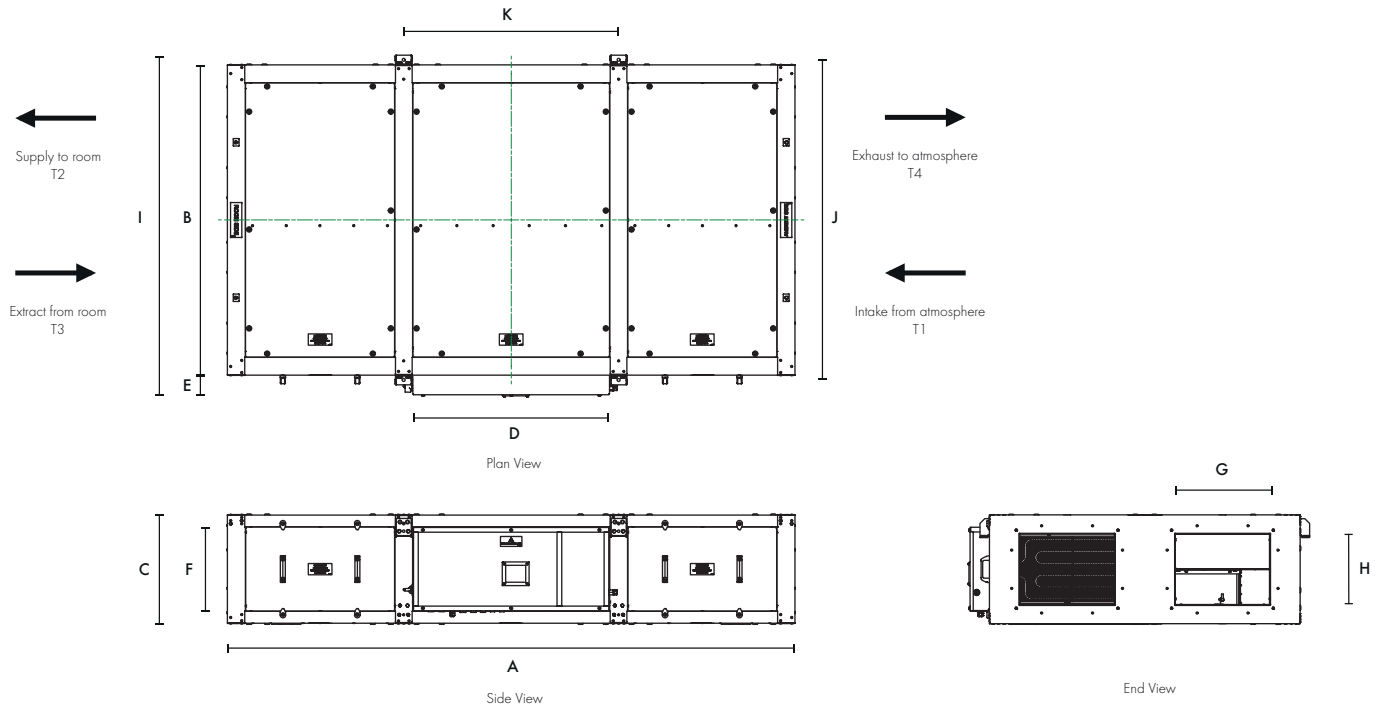


A (LENGTH)	B (WIDTH)	C (HEIGHT)	D	E	F	G	H	I	J	K	kg
2400	1312	460	831	88	356	400	300	1440	1353	908	338

Heat Recovery Efficiency

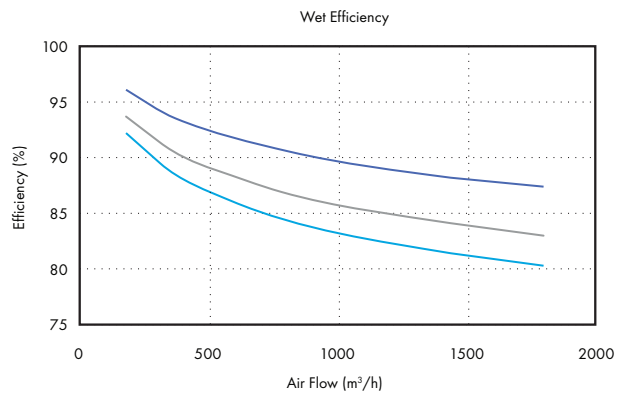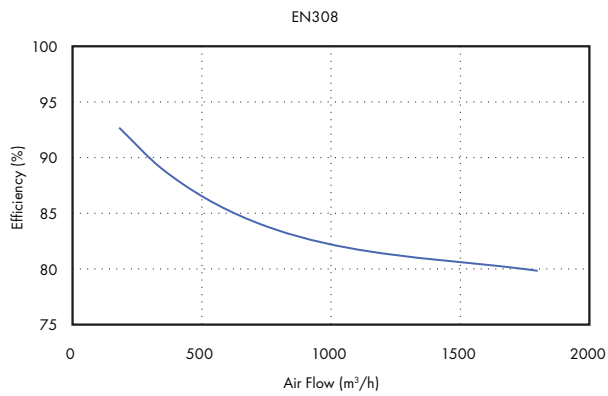

- INTAKE -5°C, 90% RH
- INTAKE 0°C, 90% RH
- INTAKE +5°C, 60% RH

## Performance Guide - Sentinel Apex HR10

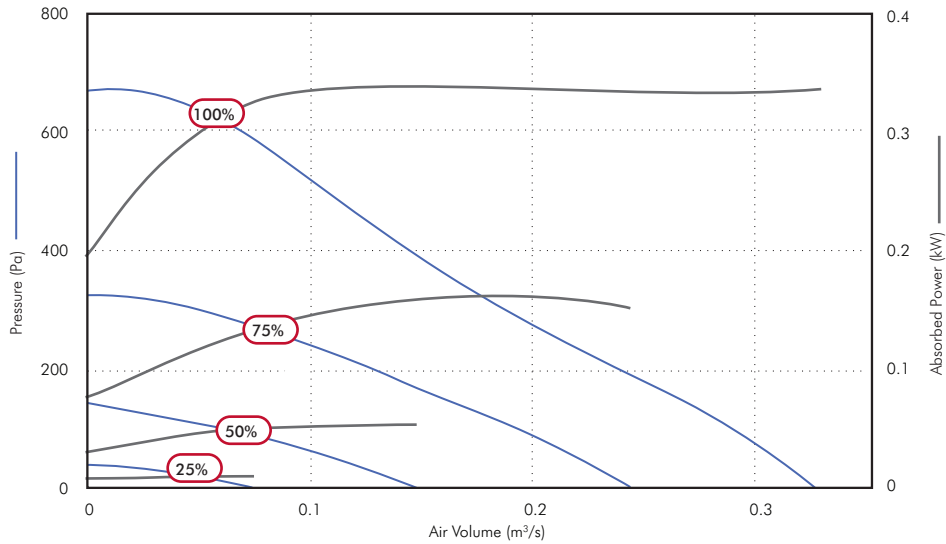

Speed	Airflow, m <sup>3</sup> /s @ Pa											Fans F.L.C.	Supply Voltage	Frost Heater	Unit Rated Current	
	0	25	50	100	150	200	250	300	400	500						
100%	m <sup>3</sup> /s	0.33	0.32	0.31	0.29	0.26	0.24	0.21	0.18	0.15	0.10	1.5A	230/1/50	2.8kW	14A	
	SFP	1.03	1.05	1.08	1.17	1.28	1.40	1.61	1.87	2.32	3.24					
	kW	0.337	0.337	0.337	0.334	0.333	0.333	0.335	0.337	0.337	0.338					
75%	m <sup>3</sup> /s	0.24	0.23	0.22	0.19	0.15	0.13	0.09								
	SFP	0.62	0.67	0.74	0.84	1.03	1.22	1.55								
	kW	0.151	0.155	0.160	0.160	0.160	0.153	0.138								
50%	m <sup>3</sup> /s	0.15	0.13	0.11	0.06											
	SFP	0.34	0.37	0.47	0.79											
	kW	0.050	0.050	0.051	0.046											
25%	m <sup>3</sup> /s	0.07	0.03													
	SFP	0.08	0.21													
	kW	0.006	0.006													

## Sound Data - Sentinel Apex HR10

Speed	Test Mode	63	125	250	500	1k	2k	4k	8k	Sound Pressure level @ 3.0m dBA
100%	Breakout	57	53	55	47	42	40	36	26	30
	Exhaust T4	55	57	63	54	56	52	42	33	
	Extract T3	58	59	71	61	59	59	56	51	
	Intake T1	58	58	68	58	60	59	56	51	
	Supply T2	51	49	61	54	54	51	42	34	
75%	Breakout	51	48	48	44	35	33	25	21	24
	Exhaust T4	50	53	54	51	48	45	33	25	
	Extract T3	53	56	52	56	54	51	48	41	
	Intake T1	53	56	61	51	54	51	47	39	
	Supply T2	46	46	53	48	46	44	33	25	
50%	Breakout	45	44	35	33	24	23	18	21	14
	Exhaust T4	44	49	39	38	38	35	22	23	
	Extract T3	48	54	50	44	42	41	36	25	
	Intake T1	47	52	51	42	42	40	34	25	
	Supply T2	40	43	38	37	37	34	22	23	
25%	Breakout	36	31	27	18	14	15	17	21	6
	Exhaust T4	36	30	24	20	19	17	18	23	
	Extract T3	40	37	34	26	23	19	19	22	
	Intake T1	40	34	32	23	20	17	19	23	
	Supply T2	31	27	24	20	17	15	18	23	

For full sound and performance data please use our Fan Selection Program [www.vent-axia.com/fanselector/product/apex](http://www.vent-axia.com/fanselector/product/apex)

Sound data derived from independent testing at Sound Research Laboratories in accordance with EN ISO 3741:2010. Published dB(A) figures are free field sound pressure levels at 3m with spherical propagation at a reference level of  $2 \times 10^{-5}$  Pa. The inlet/outlet sound power level spectra figures are dB with a reference of  $10^{-12}$  watts.

## Accessories

### Attenuator



Single skinned attenuators purpose designed for the Apex Heat Recovery range to minimise in duct noise. Attenuators are supplied in standard lengths of 900mm, 1200mm and 1500mm, constructed from Galvanised steel with profiled perforated sheet internal, mineral wool sound absorbing material and 30mm profiled flanges for duct and unit mounting. Data has been obtained by testing in accordance with BS EN ISO7235:2009.

Stock Ref.	Dimensions (mm)			kg Weight	Insertion Loss dB								m <sup>3</sup> /hr @ Pa				
	Length	Width	Height		63	125	250	500	1k	2k	4k	8k	300	600	1000	1500	2000
ATT900-HR10	900	400	300	18	2	3	8	15	27	21	14	10	1	3	8	17	30
ATT1200-HR10	1200	400	300	23	2	4	10	19	36	24	16	12	1	3	8	18	32
ATT1500-HR10	1500	400	300	34	2	5	12	24	44	28	19	14	1	3	9	20	36


### Duct mounted Heating / Cooling



Rectangular duct mounted heater battery with either electric heating complete with integral thyristor controls, or LPHW water heating, each designed to provide approximately 10°C temperature rise. Chilled water cooler also available with integral condensate tray. Note waterside controls are not included.

Stock Ref.	Type	Dimensions (mm)			kg Weight	Heater rating kW	Electrical supply	Water Temp			m <sup>3</sup> /hr @ Pa				
		Length	Width	Height				Flow	Return	Connection	300	600	1000	1500	2000
EHB-HR10	HR 10 Duct mounted Rectangular electric heater with controls	300	400	300	6	4.00	230/1/50	N/A	N/A	N/A	1	3	8	18	32
HWB-HR10	HR 10 Duct mounted Rectangular LPHW heating battery	200	400	300	7	3.35	N/A	80°C	60°C	1/2"	1	3	8	18	32
CWB-HR10	HR 10 Duct mounted Rectangular water cooling battery	200	500	300	7	4.13	N/A	6°C	12°C	3/4"	1	3	8	18	32

### Roof Assembly



Stock Ref	Length mm	Width mm	Height mm	Weight kg
WRF-HR10	2400	1455	95	52

### Intake / Exhaust Cowl



Weather inlet/discharge cowl for external mounting (one required for each airstream).

Stock Ref	Length mm	Width mm	Height mm	Weight kg
497219	394	402	380	6

### Transformation Piece



Rectangular to round transformation piece designed to fix directly to the unit or any of the specific HR10 duct accessories to enable connection to 315mm round ducting.

Stock Ref	Length mm	Width mm	Height mm	Weight kg
497223	325	400	300	4

### Flexible Connection



Stock Ref	Length mm	Width mm	Height mm	Weight kg
497019	130	400	300	4

# Sentinel Apex HR15

- Very low sound levels independently tested and verified by SRL
- Low SFP utilising IE 5 equivalent motors
- High Heat Recovery Efficiency - up to 93% (EN308)
- Automatic summer bypass sized to eliminate performance loss
- ePM10 50% and ePM1 50% filters as standard (M5 / F7 equivalent)
- Filter access from bottom and side as standard
- Digital on board controller and remote room controller as standard
- App connectivity as standard
- Wired and Wireless communication sensors available
- Integral condensate tray and pump
- Electric frost protection heater as standard



## Performance simply delivered with more as standard

Vent-Axia's Sentinel Apex range of commercial heat recovery units with up to 93% EN308 heat recovery efficiency, low sound levels and low specific fan powers the range provides high levels of performance efficiently. A new advanced control system that provides on board control, in room control and App based control full functionality commissioning and monitoring is simply provided. This control can be coupled with Vent-Axia's new range of sensors with wired or wireless communication providing close control of, and monitoring of your indoor air quality. Sensors include CO<sub>2</sub>, humidity and temperature and provide both proportional and switch control.

The Sentinel Apex HR15 unit is manufactured with a double skinned pentapost construction incorporating aluzinc frames and panels. The panels are acoustically and thermally treated with 90kg/m<sup>3</sup> high efficiency acoustic and thermally insulating foam (fire retardant to BS476 Part 7 Class 1 & Part 6 Class O). The construction of the unit, IPX4, allows for internal and external mounting as standard, however, the roof assembly should be included for full external locations.

The housing is designed to be as compact as possible for concealed false ceiling applications with top and bottom access panels for maintenance. Access panels are sized to enable single person maintenance.

The fans utilised in the Sentinel Apex HR15 are the latest EC/DC external rotor motors specifically chosen for their low power consumption and low noise characteristics. The assembly is dynamically balanced to DIN ISO 1940 Grade 6.3. Ball bearings are greased for life. Insulation is Class 'B' (from -25°C to +60°C). All models incorporate internal electronic overload protection and a soft start function.

The Sentinel Apex HR15 is complete as standard with ISO ePM10 50% (M5) extract filter and ISO ePM1 50% (F7) supply, complete with a filter change warning. Filters have been selected to fully comply with the requirements of ISO16890 whilst having low pressure loss characteristics.

An integral electric frost heater is included to provide frost protection of the cell and filters down to -10°C.

The unit is complete with an integral summer bypass facility which has been designed to provide full bypass without impact to the airflow or

power consumption of the unit whilst in bypass mode.

Airflow and power consumption tested in accordance with BS EN 5801. Sound data derived from independent testing at Sound Research Laboratories in accordance with EN ISO 3741:2010. Published dB(A) figures are free field sound pressure levels at 3m with spherical propagation at a reference level of 2 x 10<sup>-5</sup> Pa. The inlet/outlet sound power level spectra figures are dB with a reference of 10<sup>-12</sup> watts.

An integral condensate tray is fitted along with an internal quiet running high quality pump allowing for removal of the condensate via a 10mm condensate pipe.

To facilitate normal access and maintenance to the unit there are both side and bottom access panels as standard. Should it be required, all panels are removable allowing access and removal of the heat recovery cell and all other components. A lockable isolator is fitted to the control panel preventing accidental operation whilst any maintenance is being carried out.


The electrical supply for the unit is 230V +/- 10% / 50/60Hz / 1ph. A 24V DC power is available from the unit for powering any of the matched sensors and switches.

The Sentinel Apex HR15 unit is fitted with an integrated control system as standard with a purpose designed user interface controller incorporating an alphanumeric 2 line display with 4 button keypad for fan status and a basic commissioning setup mounted within the control panel. A remote HMI is also included for that can be mounted within the room that is being ventilated. This allows for local monitoring of the unit along with the commissioning set-up.

App based control is also available via the Vent-Axia Connect App. This provides detailed commissioning and monitoring information and the ability to control the unit remotely.



A full range of sensors is available including humidity, temperature and CO<sub>2</sub> monitoring. These sensors are available for both wired and wireless communication with the wireless sensors being either local mains or battery powered.

Dimensions (mm)

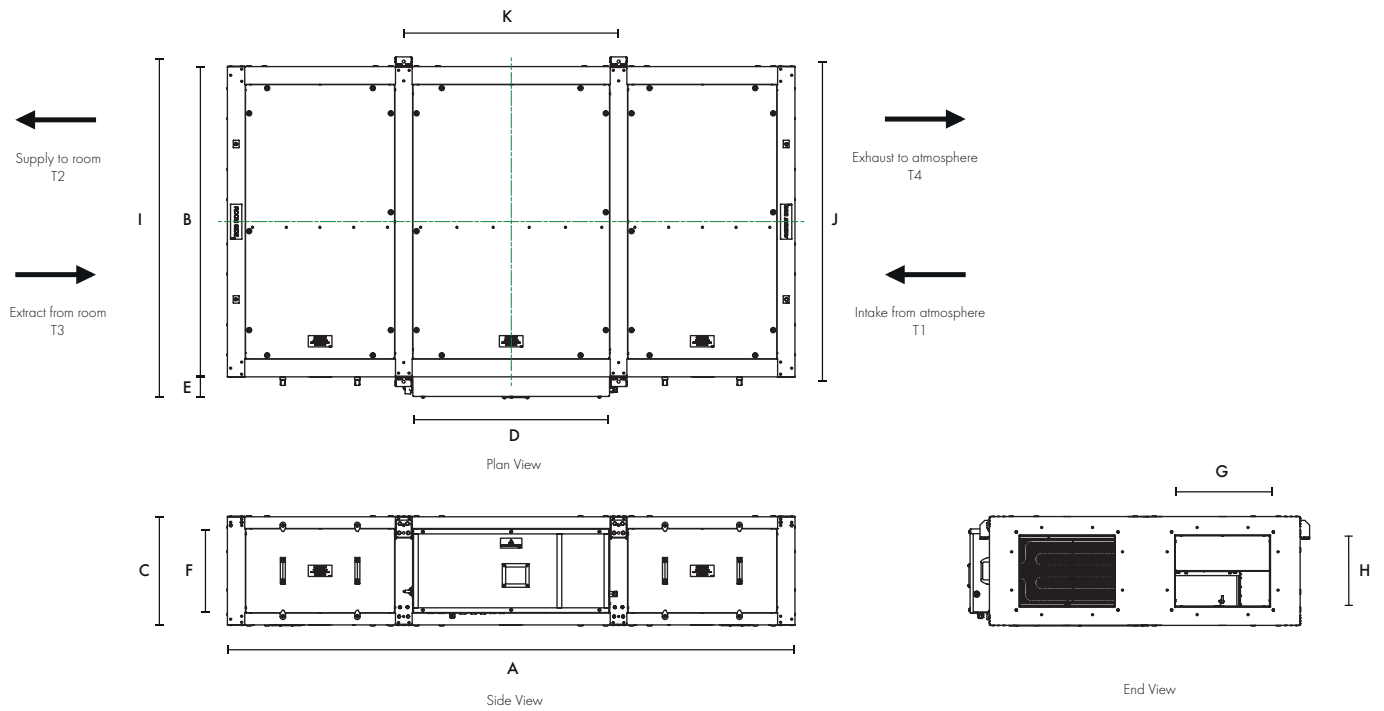


A (LENGTH)	B (WIDTH)	C (HEIGHT)	D	E	F	G	H	I	J	K	kg
2400	1312	460	831	88	356	400	300	1440	1353	908	348

Heat Recovery Efficiency

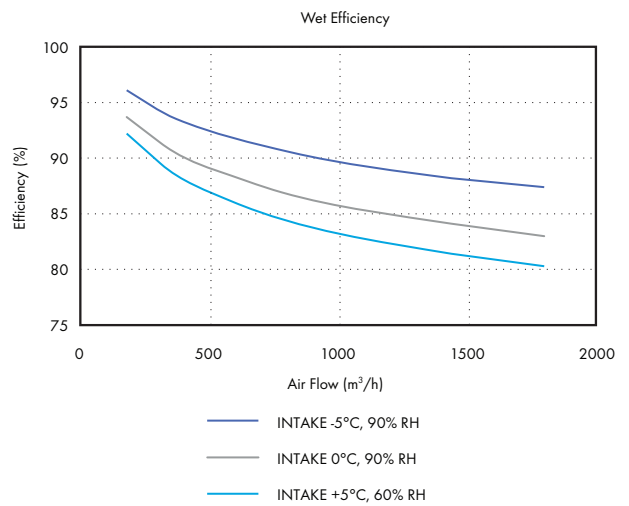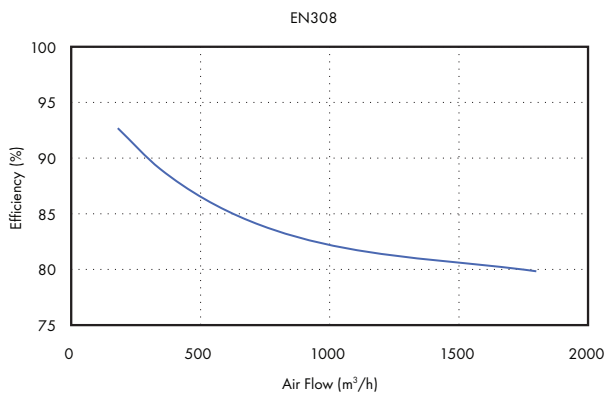

## Performance Guide - Sentinel Apex HR15

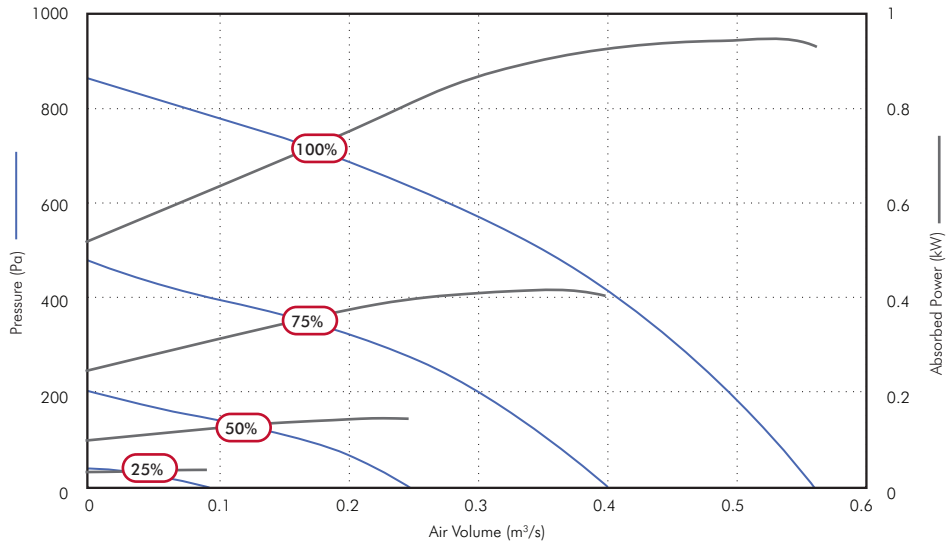

Speed	Airflow, m <sup>3</sup> /s @ Pa									Fans F.L.C.	Supply Voltage	Frost Heater	Unit Rated Current
	0	25	50	100	150	200	300	400					
100%	m <sup>3</sup> /s	0.56	0.55	0.54	0.52	0.50	0.49	0.45	0.40	5.0A	230/1/50	5.6kW	29.0A
	SFP	1.49	1.53	1.56	1.59	1.67	1.71	1.85	2.06				
	kW	0.83	0.85	0.85	0.84	0.84	0.84	0.84	0.83				
75%	m <sup>3</sup> /s	0.40	0.39	0.38	0.35	0.33	0.30	0.22	0.09				
	SFP	0.91	0.96	0.97	1.06	1.13	1.23	1.55	2.93				
	kW	0.36	0.38	0.37	0.37	0.37	0.36	0.34	0.27				
50%	m <sup>3</sup> /s	0.25	0.23	0.21	0.16	0.09							
	SFP	0.51	0.56	0.60	0.76	1.20							
	kW	0.13	0.13	0.13	0.12	0.11							
25%	m <sup>3</sup> /s	0.09	0.04										
	SFP	0.32	0.63										
	kW	0.03	0.03										

## Sound Data - Sentinel Apex HR15

Speed	Test Mode	Sound Pressure level @ 3.0m dBA								
		63	125	250	500	1k	2k	4k	8k	
100%	Breakout	65	59	67	59	51	48	41	40	38
	Exhaust T4	63	60	46	64	62	57	46	36	
	Extract T3	69	67	80	72	64	61	57	57	
	Intake T1	70	67	79	69	65	62	57	53	
	Supply T2	63	59	74	65	62	57	46	40	
75%	Breakout	59	57	62	52	43	38	32	32	30
	Exhaust T4	57	57	65	57	53	47	36	29	
	Extract T3	64	64	72	65	56	53	48	50	
	Intake T1	63	65	74	62	56	52	47	47	
	Supply T2	56	56	67	57	53	58	36	33	
50%	Breakout	53	57	46	40	32	27	23	24	22
	Exhaust T4	50	53	48	43	41	35	24	24	
	Extract T3	55	61	60	53	45	40	40	34	
	Intake T1	56	62	60	51	45	40	38	28	
	Supply T2	49	52	50	43	41	35	25	24	
25%	Breakout	49	51	40	31	27	23	20	24	14
	Exhaust T4	49	38	34	25	24	22	17	24	
	Extract T3	52	42	42	31	26	26	18	24	
	Intake T1	51	42	41	30	27	23	18	23	
	Supply T2	47	36	33	25	24	21	16	23	

For full sound and performance data please use our Fan Selection Program [www.vent-axia.com/fanselector/product/apex](http://www.vent-axia.com/fanselector/product/apex)

Sound data derived from independent testing at Sound Research Laboratories in accordance with EN ISO 3741:2010. Published dB(A) figures are free field sound pressure levels at 3m with spherical propagation at a reference level of  $2 \times 10^{-5}$  Pa. The inlet/outlet sound power level spectra figures are dB with a reference of  $10^{-12}$  watts.

## Accessories

### Attenuator



Single skinned attenuators purpose designed for the Apex Heat Recovery range to minimise in duct noise. Attenuators are supplied in standard lengths of 900mm, 1200mm and 1500mm, constructed from Galvanised steel with profiled perforated sheet internal, mineral wool sound absorbing material and 30mm profiled flanges for duct and unit mounting. Data has been obtained by testing in accordance with BS EN ISO7235:2009.

Stock Ref.	Dimensions (mm)			kg	Insertion Loss dB						m <sup>3</sup> /hr @ Pa						
	Length	Width	Height		63	125	250	500	1k	2k	4k	8k	300	600	1000	1500	2000
ATT900-HR15	900	400	300	18	2	3	8	15	27	21	14	10	1	3	8	17	30
ATT1200-HR15	1200	400	300	23	2	4	10	19	36	24	16	12	1	3	8	18	32
ATT1500-HR15	1500	400	300	34	2	5	12	24	44	28	19	14	1	3	9	20	36


### Duct mounted Heating / Cooling



Rectangular duct mounted heater battery with either electric heating complete with integral thyristor controls, or LPHW water heating, each designed to provide approximately 10°C temperature rise. Chilled water cooler also available with integral condensate tray. Note waterside controls are not included.

Stock Ref.	Type	Dimensions (mm)			kg	Heater rating kW	Electrical supply	Water Temp			m <sup>3</sup> /hr @ Pa				
		Length	Width	Height				Flow	Return	Connection	300	600	1000	1500	2k
EHB-HR15	Heater with controls	300	400	300	7	5.00	230/1/50	N/A	N/A	N/A	1	3	8	18	32
HWB-HR15	HR 15 Duct mounted Rectangular LPHW heating battery	200	400	310	8	5.03	N/A	80°C	60°C	1/2"	1	3	8	18	32
CWB-HR15	HR 15 Duct mounted Rectangular water cooling battery	200	500	350	8	6.23	N/A	6°C	12°C	3/4"	1	3	8	18	32

### Roof Assembly



Stock Ref	Length mm	Width mm	Height mm	Weight kg
WRF-HR15	2400	1455	95	52

### Transformation Piece



Rectangular to round transformation piece designed to fix directly to the unit or any of the specific HR15 duct accessories to enable connection to 315mm round ducting.

Stock Ref	Length mm	Width mm	Height mm	Weight kg
495296	325	400	300	4

### Intake / Exhaust Cowl



Weather inlet/discharge cowl for external mounting (one required for each airstream).

Stock Ref	Length mm	Width mm	Height mm	Weight kg
496597	394	402	380	6

### Flexible Connection




Stock Ref	Length mm	Width mm	Height mm	Weight kg
497020	130	400	300	4



# Sentinel Apex HR21

- Very low sound levels independently tested and verified by SRL
- Low SFP utilising IE 5 equivalent motors
- High Heat Recovery Efficiency - up to 93% (EN308)
- Automatic summer bypass sized to eliminate performance loss
- ePM10 50% and ePM1 50% filters as standard (M5 / F7 equivalent)
- Filter access from bottom and side as standard
- Digital on board controller and remote room controller as standard
- App connectivity as standard
- Wired and Wireless communication sensors available
- Integral condensate tray and pump
- Electric frost protection heater as standard

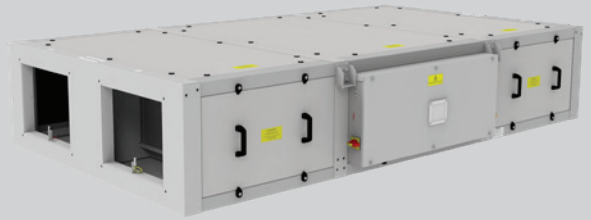

## Performance simply delivered with more as standard

Vent-Axia's Sentinel Apex range of commercial heat recovery units with up to 93% EN308 heat recovery efficiency, low sound levels and low specific fan powers the range provides high levels of performance efficiently. A new advanced control system that provides on board control, in room control and App based control full functionality commissioning and monitoring is simply provided. This control can be coupled with Vent-Axia's new range of sensors with wired or wireless communication providing close control of, and monitoring of your indoor air quality. Sensors include CO<sub>2</sub>, humidity and temperature and provide both proportional and switch control.

The Sentinel Apex HR21 unit is manufactured with a double skinned pentapost construction incorporating aluzinc frames and panels. The panels are acoustically and thermally treated with 90kg/m<sup>3</sup> high efficiency acoustic and thermally insulating foam (fire retardant to BS476 Part 7 Class 1 & Part 6 Class O). The construction of the unit, IPX4, allows for internal and external mounting as standard, however, the roof assembly should be included for full external locations.

The housing is designed to be as compact as possible for concealed false ceiling applications with top and bottom access panels for maintenance. Access panels are sized to enable single person maintenance.

The fans utilised in the Sentinel Apex HR21 are the latest EC/DC external rotor motors specifically chosen for their low power consumption and low noise characteristics. The assembly is dynamically balanced to DIN ISO 1940 Grade 6.3. Ball bearings are greased for life. Insulation is Class 'B' (from -25°C to +60°C). All models incorporate internal electronic overload protection and a soft start function.

The Sentinel Apex HR21 is complete as standard with ISO ePM10 50% (M5) extract filter and ISO ePM1 50% (F7) supply, complete with a filter change warning. Filters have been selected to fully comply with the requirements of ISO16890 whilst having low pressure loss characteristics.

An integral electric frost heater is included to provide frost protection of the cell and filters down to -10°C.

The unit is complete with an integral summer bypass facility which has been designed to provide full bypass without impact to the airflow or

power consumption of the unit whilst in bypass mode.

Airflow and power consumption tested in accordance with BS EN 5801. Sound data derived from independent testing at Sound Research Laboratories in accordance with EN ISO 3741:2010. Published dB(A) figures are free field sound pressure levels at 3m with spherical propagation at a reference level of 2 x 10<sup>-5</sup> Pa. The inlet/outlet sound power level spectra figures are dB with a reference of 10<sup>-12</sup> watts.

An integral condensate tray is fitted along with an internal quiet running high quality pump allowing for removal of the condensate via a 10mm condensate pipe.

To facilitate normal access and maintenance to the unit there are both side and bottom access panels as standard. Should it be required, all panels are removable allowing access and removal of the heat recovery cell and all other components. A lockable isolator is fitted to the control panel preventing accidental operation whilst any maintenance is being carried out.


The electrical supply for the unit is 230V +/- 10% / 50/60Hz / 1ph. A 24V DC power is available from the unit for powering any of the matched sensors and switches.

The Sentinel Apex HR21 unit is fitted with an integrated control system as standard with a purpose designed user interface controller incorporating an alphanumeric 2 line display with 4 button keypad for fan status and a basic commissioning setup mounted within the control panel. A remote HMI is also included for that can be mounted within the room that is being ventilated. This allows for local monitoring of the unit along with the commissioning set-up.

App based control is also available via the Vent-Axia Connect App. This provides detailed commissioning and monitoring information and the ability to control the unit remotely.



A full range of sensors is available including humidity, temperature and CO<sub>2</sub> monitoring. These sensors are available for both wired and wireless communication with the wireless sensors being either local mains or battery powered.

Dimensions (mm)

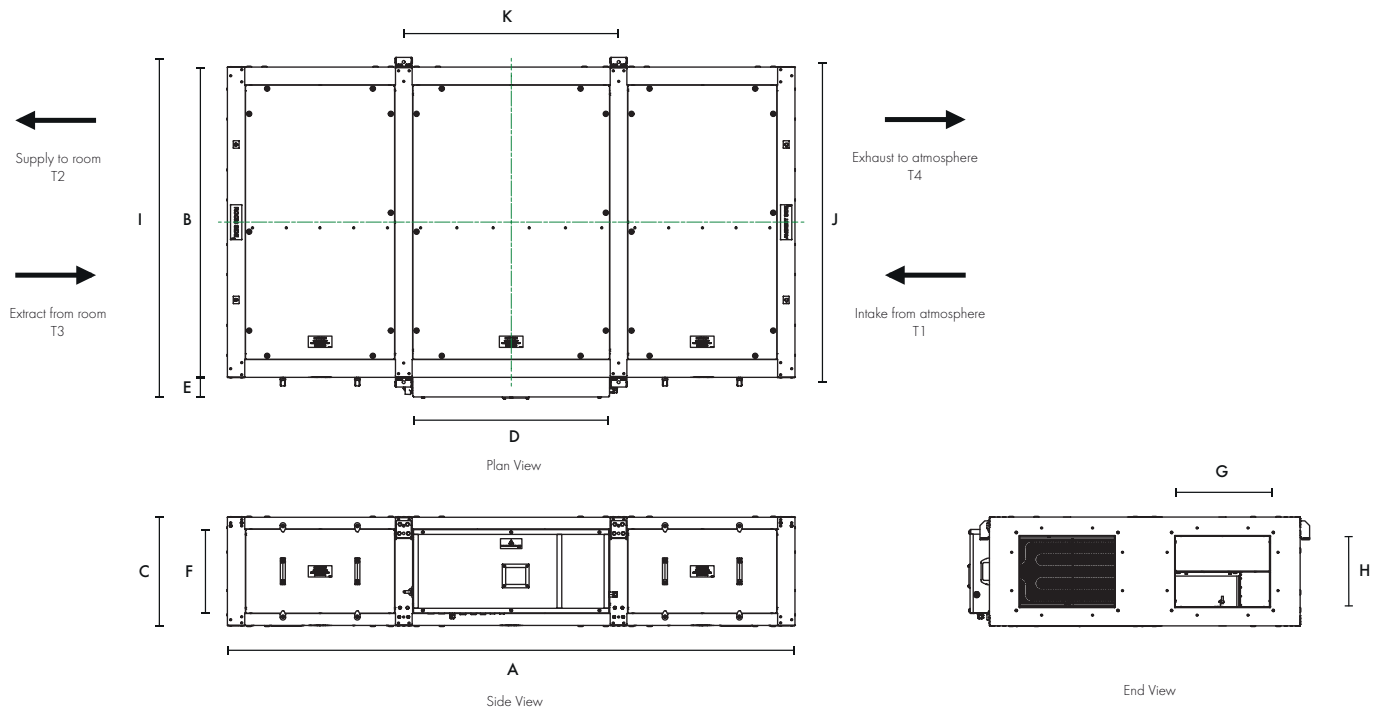


A (LENGTH)	B (WIDTH)	C (HEIGHT)	D	E	F	G	H	I	J	K	kg
2965	1319	620	1024	88	518	500	400	1446	1359	1097	470

Heat Recovery Efficiency

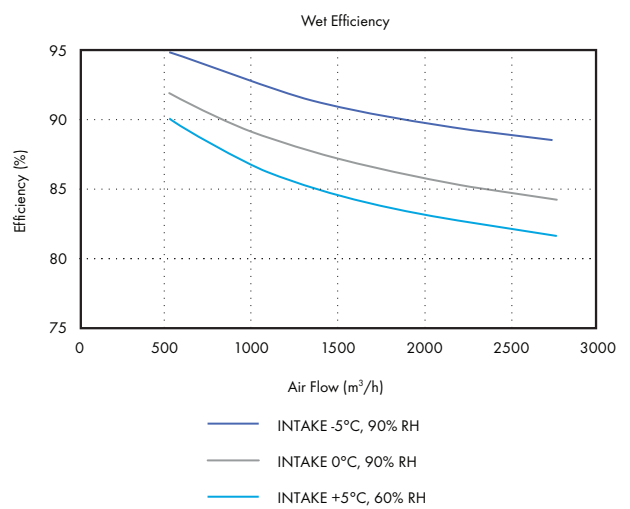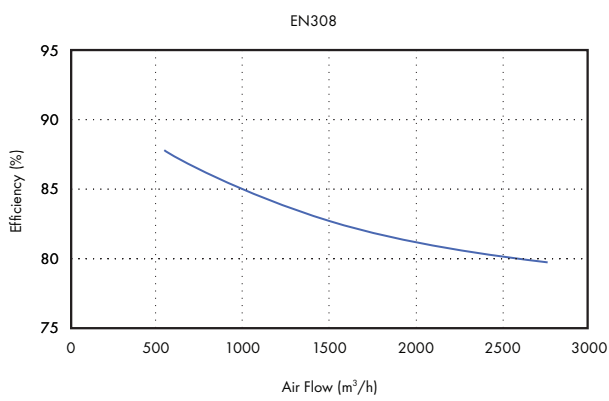

## Performance Guide - Sentinel Apex HR21

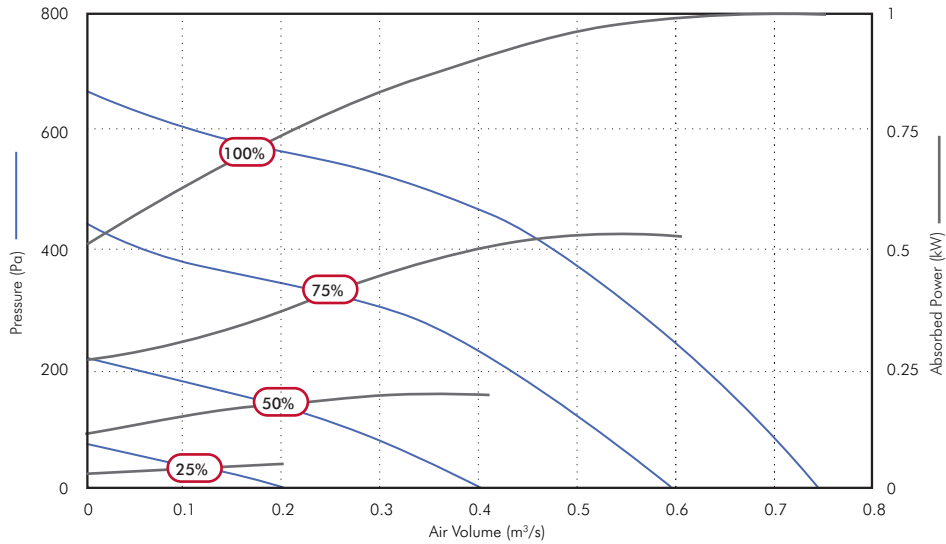

Speed	Airflow, m³/s @ Pa											Fans F.L.C.	Supply Voltage	Frost Heater	Unit Rated Current	
	0	25	50	100	150	200	250	300	400	500	600					
100%	m³/s	0.76	0.74	0.72	0.70	0.66	0.63	0.60	0.57	0.48	0.34	0.11	4.2A	230/1/50	7.8kW	39A
	SFP	1.31	1.36	1.40	1.45	1.52	1.59	1.64	1.72	2.00	2.53	6.08				
	kW	1.004	1.004	1.005	1.007	1.009	1.002	0.988	0.973	0.970	0.856	0.655				
75%	m³/s	0.60	0.59	0.56	0.52	0.49	0.43	0.38	0.31							
	SFP	0.89	0.92	0.97	1.04	1.09	1.22	1.32	1.49							
	kW	0.538	0.540	0.542	0.541	0.534	0.522	0.498	0.459							
50%	m³/s	0.41	0.39	0.35	0.27	0.17	0.03									
	SFP	0.53	0.55	0.62	0.75	1.08	5.22									
	kW	0.214	0.213	0.213	0.204	0.179	0.145									
25%	m³/s	0.20	0.15	0.08												
	SFP	0.30	0.39	0.59												
	kW	0.061	0.057	0.050												

## Sound Data - Sentinel Apex HR21

Speed	Test Mode	Sound Pressure level @ 3.0m dBA								
		63	125	250	500	1k	2k	4k	8k	
100%	Breakout	60	57	57	47	44	38	34	32	100%
	Exhaust T4	60	58	60	57	57	51	44	42	
	Extract T3	64	65	67	64	61	56	50	48	
	Intake T1	63	65	68	64	61	56	51	49	
	Supply T2	59	59	62	57	57	51	46	42	
75%	Breakout	54	57	50	42	37	34	28	25	75%
	Exhaust T4	54	58	52	49	50	44	37	33	
	Extract T3	58	65	63	56	53	49	43	41	
	Intake T1	57	63	61	58	53	48	43	41	
	Supply T2	52	54	52	48	50	44	39	34	
50%	Breakout	51	52	45	35	31	27	21	22	50%
	Exhaust T4	65	55	47	40	42	36	30	27	
	Extract T3	60	60	58	49	44	40	35	31	
	Intake T1	57	62	56	49	45	39	34	31	
	Supply T2	53	49	47	39	42	36	29	27	
25%	Breakout	48	39	42	24	22	17	18	22	25%
	Exhaust T4	48	35	35	29	31	23	20	25	
	Extract T3	57	44	44	37	34	29	21	26	
	Intake T1	53	43	46	37	32	29	20	25	
	Supply T2	44	34	34	28	30	22	19	25	

For full sound and performance data please use our Fan Selection Program [www.vent-axia.com/fanselector/product/apex](http://www.vent-axia.com/fanselector/product/apex)

Sound data derived from independent testing at Sound Research Laboratories in accordance with EN ISO 3741:2010. Published dB(A) figures are free field sound pressure levels at 3m with spherical propagation at a reference level of  $2 \times 10^{-5}$  Pa. The inlet/outlet sound power level spectra figures are dB with a reference of  $10^{-12}$  watts.

## Accessories

### Attenuator



Single skinned attenuators purpose designed for the Apex Heat Recovery range to minimise in duct noise. Attenuators are supplied in standard lengths of 900mm, 1200mm and 1500mm, constructed from Galvanised steel with profiled perforated sheet internal, mineral wool sound absorbing material and 30mm profiled flanges for duct and unit mounting. Data has been obtained by testing in accordance with BS EN ISO7235:2009.

Stock Ref.	Dimensions (mm)			kg	Insertion Loss dB								m <sup>3</sup> /hr @ Pa					
	Length	Width	Height		63	125	250	500	1k	2k	4k	8k	300	600	1000	1500	2000	3000
ATT900-HR21	900	500	400	25	3	7	11	20	28	21	13	8	1	2	5	11	19	43
ATT1200-HR21	1200	500	400	32	4	9	15	26	35	26	15	10	1	2	5	12	21	47
ATT1500-HR21	1500	500	400	46	5	11	19	33	45	31	18	11	1	2	5	12	22	50


### Duct mounted Heating / Cooling



Rectangular Duct mounted heater battery with either electric heating complete with integral thyristor controls, or LPHW water heating, each designed to provide approximately 10°C temperature rise. Chilled water cooler also available with integral condensate tray. Note waterside controls are not included.

Stock Ref.	Type	Dimensions (mm)			kg	Heater rating kW	Electrical supply	Water Temp			m <sup>3</sup> /hr @ Pa					
		Length	Width	Height				Flow	Return	Connection	300	600	1000	1500	2000	3000
EHB-HR21	HR 21 Duct mounted Rectangular electric heater with controls	300	500	400	10	7.50	230/1/50	N/A	N/A	N/A	1	2	5	12	21	47
HWB-HR21	HR 21 Duct mounted Rectangular LPHW heating battery	200	500	400	10	7.03	N/A	80°C	60°C	1/2"	1	2	5	12	21	47
CWB-HR21	HR 21 Duct mounted Rectangular water cooling battery	200	500	400	10	8.65	N/A	6°C	12°C	3/4"	1	2	5	12	21	47

### Roof Assembly



Stock Ref	Length mm	Width mm	Height mm	Weight kg
WRF-HR21	2965	1455	95	63


### Intake / Exhaust Cowl



Weather inlet/discharge cowl for external mounting (one required for each airstream).

Stock Ref	Length mm	Width mm	Height mm	Weight kg
497220	494	502	510	9


### Transformation Piece



Rectangular to round transformation piece designed to fix directly to the unit or any of the specific HR21 duct accessories to enable connection to 400mm round ducting.

Stock Ref	Length mm	Width mm	Height mm	Weight kg
497224	325	500	400	5

### Flexible Connection



Stock Ref	Length mm	Width mm	Height mm	Weight kg
497021	130	500	400	4



## VENT-AXIA CONTACT NUMBERS

Free technical, installation and sales advice is available

Sales Tel: 0344 856 0590  
Tech Support Tel: 0344 856 0594  
Tech Support Email: [tech@vent-axia.com](mailto:tech@vent-axia.com)  
Web: [www.vent-axia.com](http://www.vent-axia.com)  
Email: [sales@vent-axia.com](mailto:sales@vent-axia.com)

### Supply & Service

All sales made by Vent-Axia Limited are made only upon the terms of the Company's Conditions of Sale, a copy of which may be obtained on request. As part of the policy of continuous product improvement Vent-Axia reserves the right to alter specifications without notice.



Download our Knowledge Hub app - Your new pocket expert.

Search, View, Share - It's that easy!



Made in Britain

0225