


TRONIC dimmer

Product Data Sheet

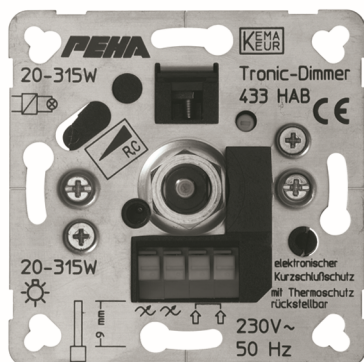

Assembly arrangement	Basic element
Method of operation	Turn/push button
Type of load	Capacitive load
Mounting method	Other
Type of fastening	Other
Surface protection	Untreated
Colour	Other
Suitable for degree of protection (IP)	IP20
Serial dimmer	No
Substation input	No
Halogen free	Yes
Frequency	50-50Hertz

TRONIC dimmer

TRONIC dimmer, inverse phase controlled dimmer, for low voltage halogen lamp with electronic transformers, filament lamps, high voltage halogen lamps and other ohmic loads, with 1 way/2 way push on/push off switch, max. phase angle adjustable for transformer matching, with soft indexing, with clamp terminals, with electronic fuse, short-circuit-proof, self-resetting thermal overload, 230 V~, 50 Hz 20-315 VA/W

Material No.	Article No.	EAN-code
00210213	D 433 HAB O.A	4010105210217

PEHA Elektro GmbH & Co.KG

a Honeywell Company
Daimlerstraße 4
58553 HALVER
DEUTSCHLAND

Tel.: 02353 9118 001
Fax: 02353 9118 311
mail: peha@honeywell.com
www.peha.de

Änderungen vorbehalten. © Honeywell PEHA