

### Instruction leaflet

To be read in full before installation and kept for future reference

#### Safety Instructions

- Ensure the power supply is switched off before installation or servicing
- This product is intended to be installed in accordance with the current edition of the IEE Wiring Regulations BS7671; and by a qualified Electrician
- The hand dryer should be supplied from a fused spur
- Do not install above washbasins or immediately adjacent to urinals, lavatories, baths & showers
- When in use, the dryers will accumulate dust. Cleaning and maintenance should be carried out regularly
- This unit is intended for drying hands only
- Long hair should be kept away from air inlet vents

#### Installation Instructions

- Remove the front cover by removing the securing screws at the base of the hand dryer, and releasing the retaining clips at the top of the hand dryer
- Release the plug of the sensor lead at the circuit board. See fig 1
- Using the base as a template, mark out the fixing holes on the mounting surface. See fig 2
- Feed the supply cable through the hole in the base and terminate the conductors into the terminal block ensuring the correct polarity is observed
- Secure the supply cable in the cord grips provided
- Secure the base to the mounting surface using the wall plugs and screws supplied
- Reconnect the sensor lead to the circuit board
- Offer the cover back to the base and secure in position.

#### Cleaning the filter

- Ensure the power supply is switched off
- Remove the filter housing from the base. See fig 3
- Take out the filter and shake out any dust or particles in the filter
- Return the filter to the housing and return the housing to the hand dryer
- **Note: Do not wash the filter with water**

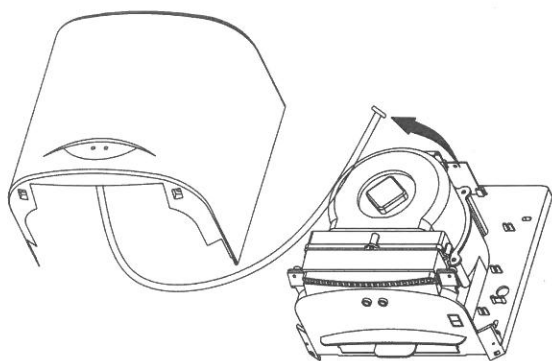


Fig 1




Fig 2

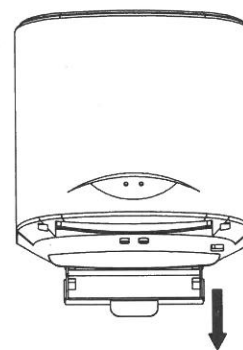


Fig 3

#### Specification

Voltage rating	230V ~ 50Hz	Total load rating	1100W
Heater Element	350W	Effective Airflow	170m <sup>3</sup> /h
Motor	650W	Air Speed	90m/s
Dimensions (mm)	H-265 W-250 D-180	Noise Level	65dB
Guarantee	1 Year	IP Rating	IPX1

#### DETA ELECTRICAL COMPANY LIMITED

Kingsway House, Laporte Way,  
Luton, Bedfordshire LU4 8RJ England  
Tel: +44 (0) 1582 544 500  
Fax: +44 (0) 1582 544 501  
Technical Hotline: +44 (0) 544 548