




- 4G Ready - built-in filter removes interference and channel loss caused by 4G mobile phone signals
- Dedicated inputs for UHF and FM/DAB
- Side mounted terminals provide easy cable management
- Integrated infra red by-pass allows control of digital satellite receivers from a second TV without additional equipment apart from a Link device and a suitable remote control.
- Distributes signals without loss to up to four secondary outlets connected to TVs/Digital recorders/Hi-Fi
- Can also be connected to a satellite or Freeview™ receiver
- Built in short circuit protection on each individual output

Please Note: To view output from the satellite RF2 output TVs will need an analogue tuner.

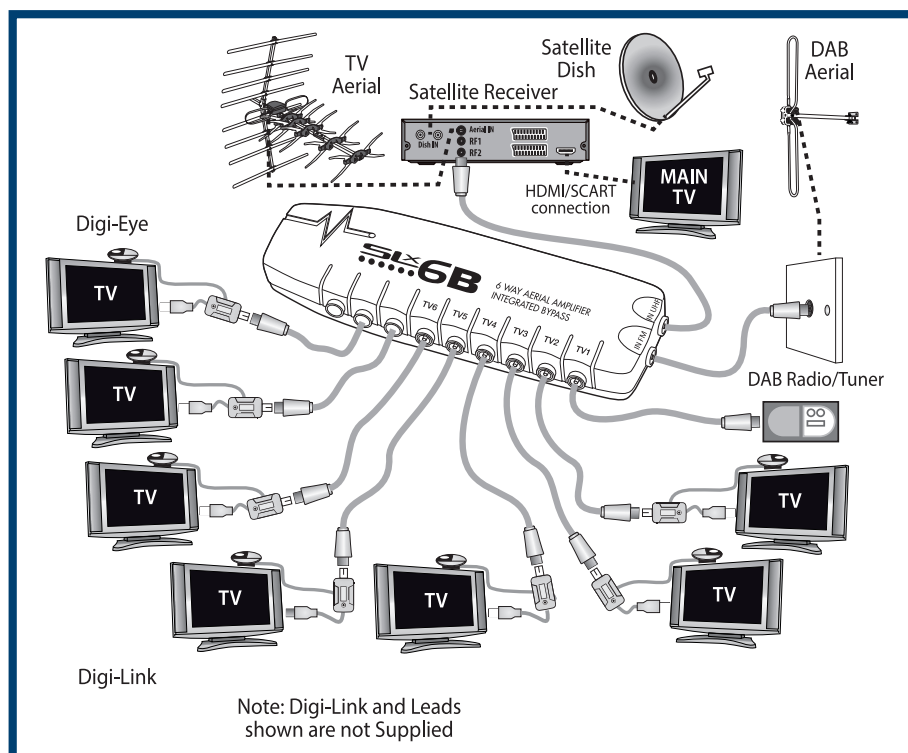

Technical Specification:

Inputs:	2
Outputs:	6
Frequency Range	UHF: 470-790MHz VHF: 30-300MHz
Max Output Level dBμV:	87dBμV
Gain per Split	UHF: 6dB VHF: 6dB
Noise Figure:	≤4dB
Isolation Loss:	23dB
IR Powering:	9VDC 15mA