

#### surge usb extension lead

## **USB**





### **POWER**

power and charge your USB devices with sockets protected against damaging surges and spikes


#### **FEATURES**

- Two USB ports (2.1A shared)
- · Protects valuable electrical equipment from surges and spikes
- £1000, 3 year connected equipment warranty
- · LED power and surge indicators
- · Wall fixing option





# PRODUCT IMAGES SRGU6xN

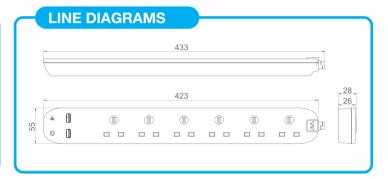

PROD	UCT INFORMATIO	N
Part Number	er SF	RGU6xN
Part Number	er Note x =	= length of cable in metre
Product Dir	nensions He	eight 28mm x Width 423m
Sockets	6	

TECHNICAL SPECIF	FICATIONS	(6
Standard(s)	This product is certified to applicable British safety standards	77
ì í	BS5733, BS EN 60950-1	
Maximum Load (Wattage)	13A: 3120 Watts, 240 Volts	
IF IN DOUBT CONSULT A Q	UALIFIED ELECTRICIAN	

SURGE TECHNICAL DATA		
Protection	3 x 14 MOV + 1 x GDT	
Maximum Surge Energy	375 Joules	
Maximum Surge Current	13500 Amps	
Clamping Voltage	775 Volts	
Response Time	< 10nS	
Thermal Cut Out	Yes	
Protection	L-N, L-E, N-E	
Surge Protection Indicator	Yes - White	
Power Indicator	Yes - Blue	

#### **SAFETY WARNING**

PLEASE READ CAREFULLY AND USE IN ACCORDANCE WITH OUR SAFETY INSTRUCTIONS BELOW

**☑** DO Uncoil cable before use **☒** DON'T Allow heavy tools etc to hang unsupported on the cable or from the socket

Position the cable carefully to avoid accidents DON'T Remove the plug and wire directly into a mains supply

DON'T Use in wet conditions DON'T Exceed the total maximum load.

Masterplug Help Line

03300 249 279

Supplied by
Luceco PLC
Stafford Park 1 Telford TF3 3BD ENGLAND

Visit our website at

www.masterplug.com