

PCV100 Series - 100W LED Drivers

Part Code	PCV12100	PCV24100
Input Voltage	100 ~ 240VAC	100 ~ 240VAC
Input Frequency	47/63Hz	47/63Hz
Power Factor	0.95	0.95
Power	100W	100W
Voltage	12Vdc	24Vdc
Current Range	0 ~ 8.33A	0 ~ 4.16A
Efficiency	87%	87%
Connections	Screw terminal on I/P & O/P	
Weight	400g	400g
Dimensions	158 x 61 x 36mm	




PCV150 Series - 150W LED Drivers

Part Code	PCV12150	PCV24150
Input Voltage	100 ~ 240VAC	100 ~ 240VAC
Input Frequency	47/63Hz	47/63Hz
Power Factor	0.95	0.95
Power	150W	150W
Voltage	12Vdc	24Vdc
Current Range	0 ~ 12.5A	0 ~ 6.25A
Efficiency	87%	87%
Connections	Screw terminal on I/P & O/P	
Weight	750g	750g
Dimensions	216 x 74 x 42mm	



PCV100 Series 100W Driver

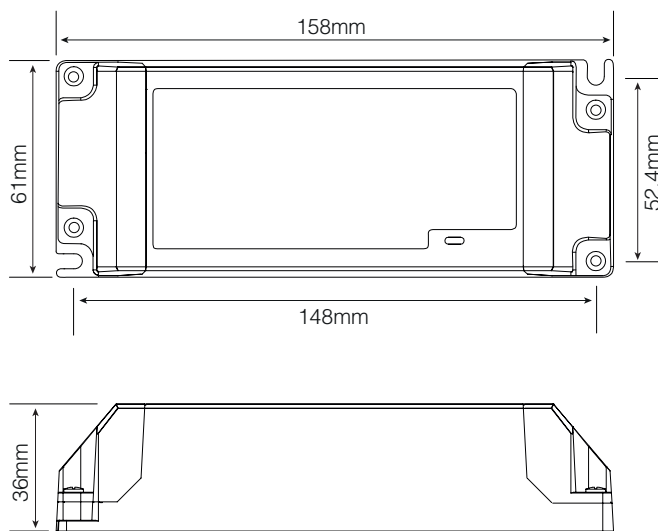

PCV150 Series 150W Driver

