


LED Power & Control - Constant Voltage

PCV12 SERIES - 12W LED DRIVERS



Part Code	PCV1212
Input Voltage	220 ~ 240VAC
Input Frequency	47/63Hz
Power Factor	0.8
Power	12W
Voltage	12Vdc
Current Range	0 ~ 1.0A
Efficiency	80%
Connections	Screw terminal on I/P & O/P
Weight	60g
Dimensions	L 98 x W 39 x H 22mm

PCV12 12W Series Driver Mechanical

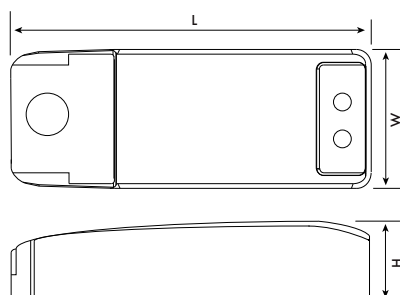

PCV20 SERIES - 20W LED DRIVERS



Part Code	PCV1220	PCV2420
Input Voltage	220 ~ 240VAC	220 ~ 240VAC
Input Frequency	47/63Hz	47/63Hz
Power Factor	0.8	0.8
Power	20W	20W
Voltage	12Vdc	24Vdc
Current Range	0 ~ 1.7A	0 ~ 0.83A
Efficiency	82%	84%
Connections	Screw terminal on I/P & O/P	Screw terminal on I/P & O/P
Weight	100g	100g
Dimensions	L 130 x W 44 x H 28mm	L 130 x W 44 x H 28mm

PCV20 Series 20W Driver Mechanical

