


Apollo G4

OPPLE

www.opple.com

Item Code	CCT	kg
520033017600	2700K/3000K/4000K	0.372kg
520033017700	2700K/3000K/4000K	0.656kg
520034068300	2700K/3000K/4000K	1.183kg





Model Name	∅ (mm)	H (mm)	Rated Voltage(V~)	Frequency (Hz)	Current(mA)	Rated Power(W)
LED CL-AP-E4 R250 6/12W-DIM-MD	250	68.5	220-240	50/60	66	12
LED CL-AP-E4 R350 8/16W-DIM-MD	350	68.5	220-240	50/60	77	16
LED CL-AP-E4 R450 11/22W-DIM-MD	450	68.5	220-240	50/60	101	22


Light Source

Product Code	Product Description	N	Energy Label	Light source code	QR Code
520033017600	LED CL-AP-E4 R250 6/12W-DIM-MD	1	D	LS103001034	
520033017700	LED CL-AP-E4 R350 8/16W-DIM-MD	1	E	LS103001434	
520034068300	LED CL-AP-E4 R450 11/22W-DIM-MD	1	E	LS103002034	

Mounting

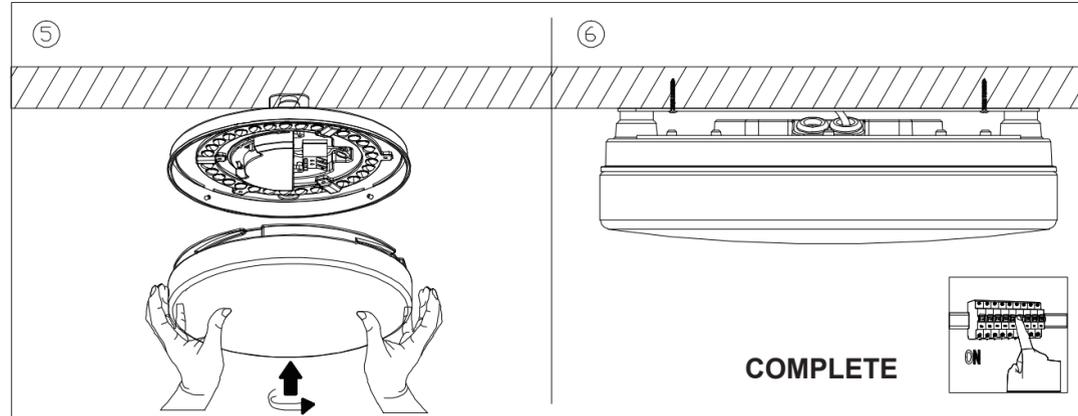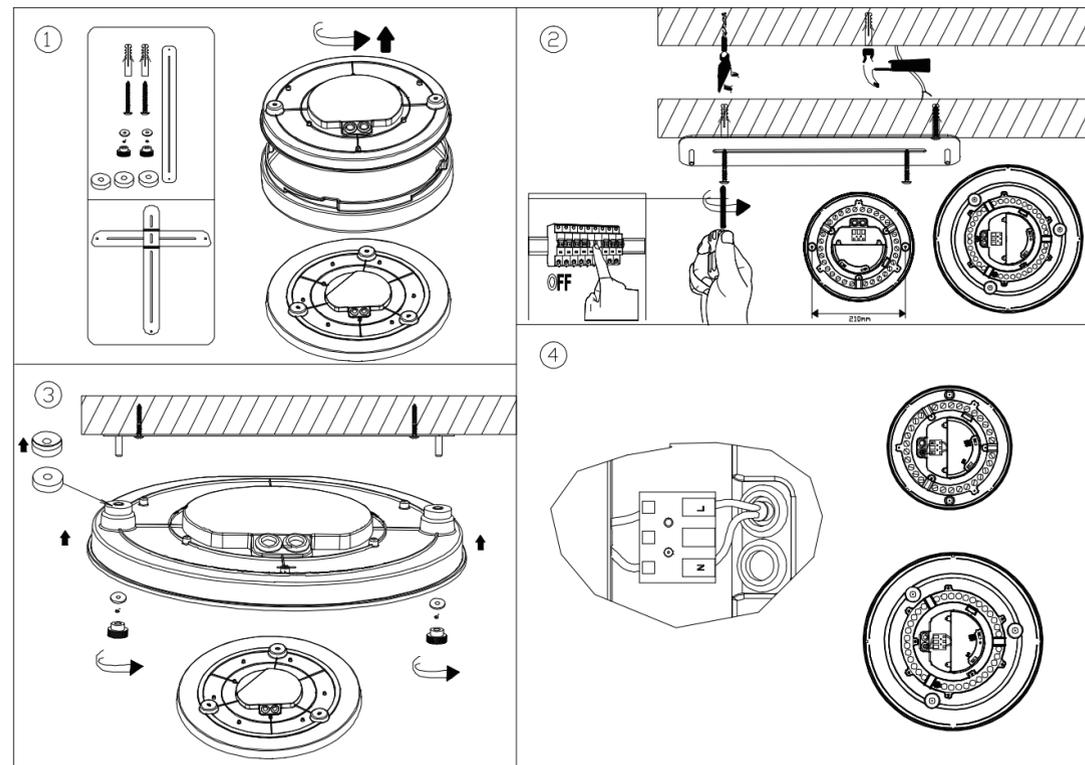

Changing Powers Settings

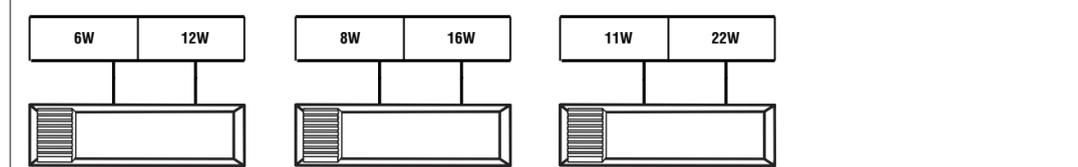


Changing Color Settings

LED CL-AP-E4 R250 6/12W-DIM-MD LED CL-AP-E4 R350 8/16W-DIM-MD LED CL-AP-E4 R450 11/22W-DIM-MD

1 settings of color temperature available with the switch on the right

- For 12W Product, can switch between 6W and 12W
- For 16W Product, can switch between 8W and 16W
- For 22W Product, can switch between 11W and 22W

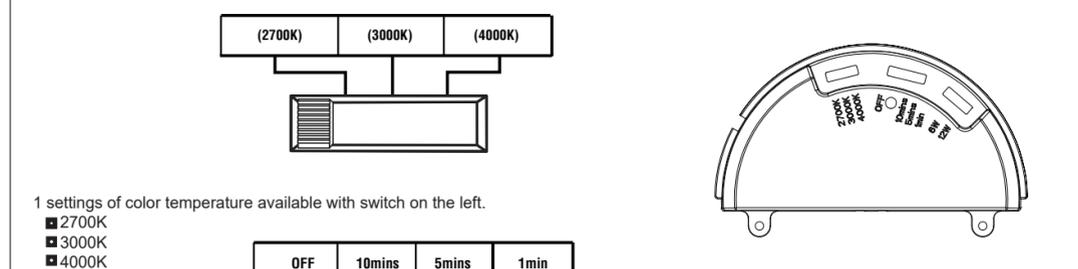

2 sensing time to choose from with the switch in the middle:


- Switch to off: sensing function will be off
- Switch to 10mins: Light will be off after 10mins, during which time no moving objects
- Switch to 5mins: Light will be off after 5mins, during which time no moving objects
- Switch to 1min: Light will be off after 1min, during which time no moving objects

Light sensor function
When microwave sensing is off, the light sensor also will be off.
When chf will be off during the day, and during the night will be on when sensing moving objects.


OPPLE

OPPLE

Motion Sensor

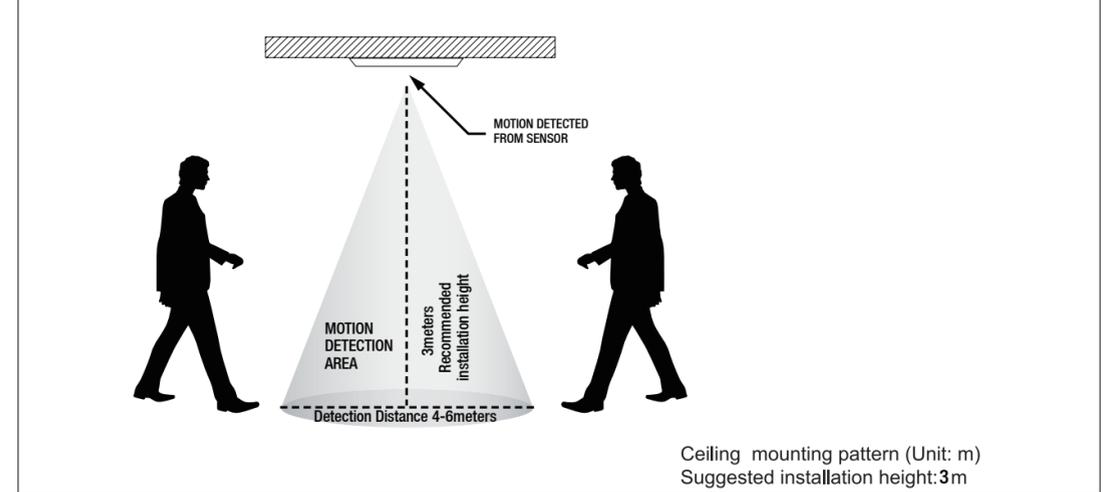

Components

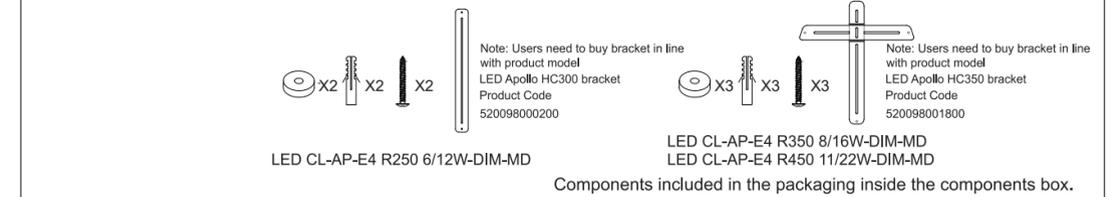

Caution: Any operation on LED module is forbidden while power-on.
Zur Vermeidung von Risiken müssen defekte Leitungen ausschließlich vom Hersteller, Inverkehrbringer oder Fachmann ausgetauscht werden.
Achtung: In Betrieb ist keine Arbeit am LED-Modul erlaubt.

For non-user replaceable light sources:
The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.
Das Leuchtmittel dieser Leuchte ist nicht austauschbar. Wenn das Leuchtmittel das Ende seiner Lebensdauer erreicht hat, muss die gesamte Leuchte ersetzt werden.

Data subject to change
Les données sont sujettes à modifications
Änderungen vorbehalten

OPPLE Lighting Co., Ltd.
Room 411, Building 1 No. 6111, Longdong Avenue, Pudong
New District, Shanghai City 201201, P. R. China
www.opple.com

OPPLE Lighting B.V.
Meerenakkerweg 1-07
5652 AR Eindhoven
The Netherlands
service@opple.com
www.opple.com