


Item Code	Luminaire Description	CCT		
542016107200	LED Skylight SDL-S Re300x600-60W-BLE2- WH	1800K-12000K	4.06kg	

The image contains a technical drawing of a rectangular luminaire. It consists of two views: a side profile on the left and a front view on the right. The side profile shows the thickness of the unit, with a dimension line labeled 'C' indicating the width. The front view shows the rectangular face of the luminaire, with a dimension line labeled 'A' indicating the height and a dimension line labeled 'B' indicating the width. The luminaire has a simple, clean design with a thin frame.


Model	A (mm)	B (mm)	C (mm)
LED SKY-RC-S RE300x600-BLE-60W	595	295	88

Light Source


Product Code	Product Description	N	Light source code	QR Code	Energy Label
542016107200	LED Skylight SDL-S Re300x600-60W-BLE2- WH	1	LS128006036-02		

Recessed Installation

①

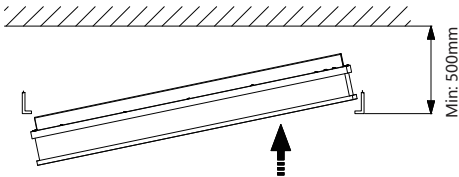


②

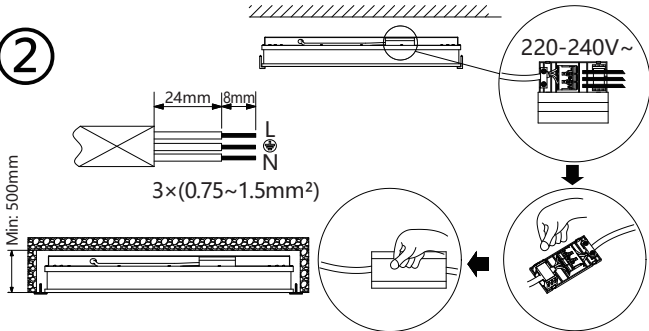


Suspended Installation (Suspension kit available as accessory)


①

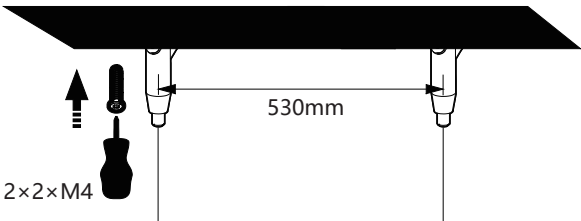

②



③



④

⑤

⑥

⑦

Code	Description	Weight
542098045500	LEDPanelS-P Suspension-Kit-G6	0.16kg

Important Safety Instructions

1. It is for non-user replaceable light sources. The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.

2. Indoor use only.

3. For type Y attachments:
The luminaire must be completely ceiling-mounted on a solid wall or other fire-resistant insulating surface. Don't install the luminaire on hollow or grid surfaces. Ceiling luminaires, chandeliers and other products must be installed on solid concrete ceilings using screw accessory package when the weight of the lamp is greater than 10 kg.

4. To reduce the risk of strangulation the flexible wiring connected to this luminaire shall be effectively fixed to the wall if the wiring is within arm's reach.

5. Indoor use only.

6. Bluetooth Maximum transmit power: <10 dBm
Bluetooth Operating frequency: 2400-2483.5MHz

Environment friendly disposal
You can help protect the environment! Please remember to respect the local regulations: hand in the non-working electrical equipments to an appropriate waste disposal centre. The packaging mnaterial is recyclable. Dispose of the packaging in an environmentally friendly manner and make it available for the recyclable material collection-service.

Luminaires are not suitable for covering with thermally insulating material.

Any operation is forbidden while power is on.
Do not disassemble the product.



Data subject to change
Les données sont sujettes à modifications
Änderungen vorbehalten

OPPLE Lighting Co., Ltd.
Room 411, Building 1 No. 6111,
Longdong Avenue, Pudong New District,
Shanghai City 201201,P. R. China
www.opple.com

Opple Lighting B.V.
Meerenakkerweg 1-07
5652 AR Eindhoven
The Netherlands
service@opple.com