


Hypra® Prisinter IP 44/55 - LV 32 A

interlocked switched sockets

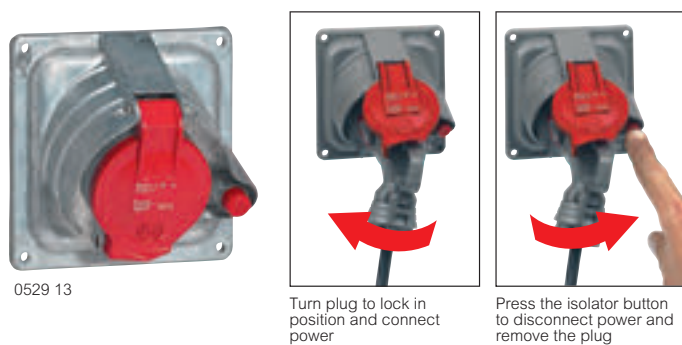

0529 04 + 0529 49

Technical information and dimensions **p. 158-159**
Conformity to International Standards **p. 198**

Conform to BS EN 60309-1, BS EN 60309-2
IP 44 when plug inserted
IP 54 when used with IP 66/67-55 straight plugs
IP 55 with cover closed or used with IP 66/67-55 angled plugs
IK 09 (plastic)
IK 10 (metal)
Stainless steel screws
Brass contacts

Pack	Cat. Nos.		Prisinter panel mounting sockets 32 A	
			Load break disconnect at the push of the button Accepts Ø6 mm padlock with cover closed Terminals accept 2.5 mm ² to 10 mm ² rigid cable (BS EN 60309-1 and IEC 60309-1) Possibility to fit 2 auxiliary C/O contacts Cat. No. 0521 96	
			200/250 V~	
1	Metal	0527 02	2 P + $\perp$	
1	Plastic	0527 03	3 P + $\perp$	
			380/415 V~	
1	0529 13	0529 03	3 P + $\perp$	
1	0529 14	0529 04	3 P + N + $\perp$	


Pack	Cat. Nos.		Surface mounting boxes	
			Enable Hypra Prisinter panel mounting sockets to be surface mounted Reversible entry box with 2 x M25 and 1 x M20 entries with 1 x M25 and 1 x M20 blanking plugs plus rear knockout entries	
1	Metal	0522 59	For 2 P + $\perp$ / 3 P + $\perp$ / 3 P + N + $\perp$ sockets	
	Plastic	0529 49		

IP 44 straight plugs **p. 162-164**



Hypra® Prisinter IP 44/55 - LV 63 A

interlocked switched sockets

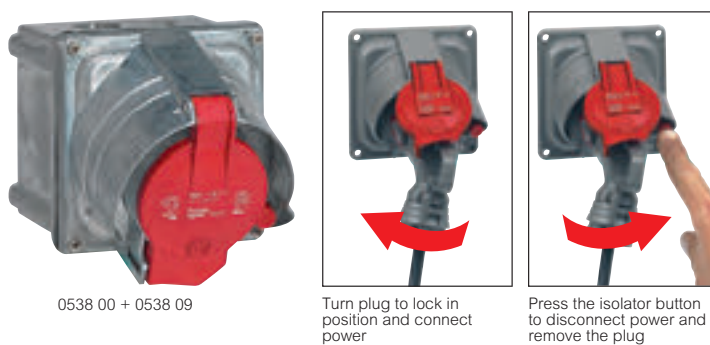

0538 00 + 0538 09

Technical information and dimensions **p. 158-159**
Conformity to International Standards **p. 198**

Conform to BS EN 60309-1, BS EN 60309-2
IP 44 when plug inserted
IP 54 when used with IP 66/67-55 straight plugs
IP 55 with cover closed or used with IP 66/67-55 angled plugs
IK 09 (plastic)
IK 10 (metal)
Stainless steel screws
Brass contacts

Pack	Cat. Nos.		Prisinter panel mounting sockets 63 A	
			Load break disconnect at the push of the button Accepts 3 x Ø8 mm padlocks with cover closed IP 2X protection against direct contact Terminals accept 6 mm ² to 25 mm ² rigid cable Possibility to fit 2 auxiliary C/O contacts Cat. No. 0521 96	
			380/415 V~	
1	Metal	0538 00	3 P + $\perp$	
1	Plastic	0536 03	3 P + N + $\perp$	
			380/415 V~	
1	0538 01	0536 04	3 P + N + $\perp$	

Pack	Cat. Nos.		Surface mounting boxes	
			Enable Hypra Prisinter panel mounting sockets to be surface mounted Reversible entry box with 2 x M32 and 1 x M20 entries with 1 x M32 and 1 x M20 blanking plugs	
1	Metal	0538 09	For 3 P + $\perp$ / 3 P + N + $\perp$ sockets	
	Plastic	0537 49		

IP 66/67-55 angled and straight plugs **p. 169-170**

